

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1057062

Luminaire Tested: CB3R-055D-835-1D-UNV-STD-W-8

Issue Date: 7/31/2025

Test Information

Test Method: LM-79-2019
Report Number: P1057062
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/31/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3R-055D-835-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE
3-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
DIRECT ONLY
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4416.9 lumens
Efficiency: N/A
Efficacy: 135.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Direct


Input Watts (W): 32.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P1057062

CATALOG NUMBER: CB3R-055D-835-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

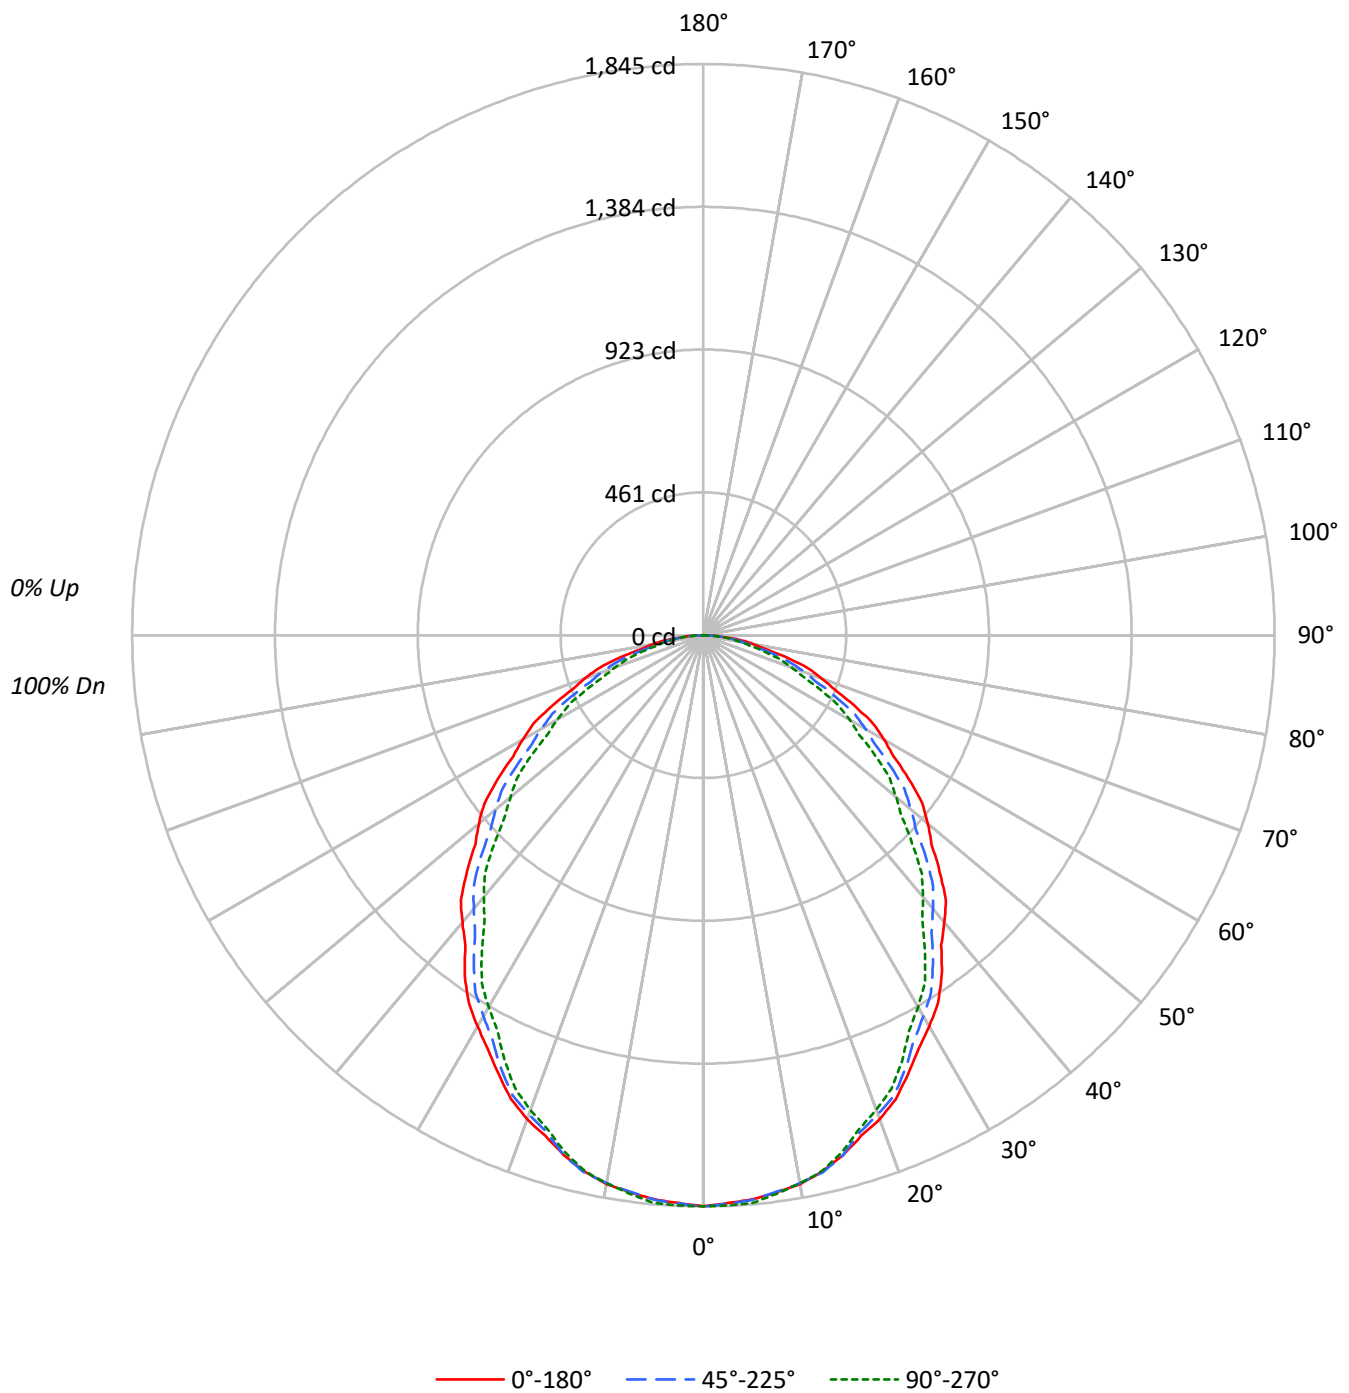

TEST NUMBER: P1057062

CATALOG NUMBER: CB3R-055D-835-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102
1	109	105	101	97	107	103	99	96	98	95	93	94	92	90	91	89	87
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74
3	91	81	74	67	89	80	73	67	77	71	66	74	69	64	72	67	63
4	84	72	64	58	82	71	63	57	69	62	56	66	60	56	64	59	55
5	78	65	56	50	75	64	56	50	62	55	49	60	54	49	58	53	48
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	43
7	67	54	45	39	65	53	45	39	51	44	39	50	43	38	48	43	38
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	45	39	34
9	58	45	37	32	57	45	37	32	43	36	31	42	36	31	41	35	31
10	55	42	34	29	53	41	34	29	40	33	29	39	33	29	38	33	28

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10437	10437	10437
5°	10388	10395	10455
10°	10342	10327	10327
15°	10184	10184	10122
20°	10018	9916	9829
25°	9766	9643	9471
30°	9527	9279	9056
35°	9275	8932	8615
40°	8941	8516	8148
45°	8638	8145	7642
50°	8326	7704	7150
55°	7987	7276	6681
60°	7620	6834	6153
65°	7191	6332	5595
70°	6697	5743	4985
75°	6072	5040	4439
80°	5294	4225	3926
85°	4083	3570	3570

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8638 cd/sqm

TEST NUMBER: P1057062

CATALOG NUMBER: CB3R-055D-835-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.1	3.9
10°-20°	489.0	11.1
20°-30°	710.5	16.1
30°-40°	807.8	18.3
40°-50°	784.2	17.8
50°-60°	662.1	15.0
60°-70°	471.1	10.7
70°-80°	251.7	5.7
80°-90°	66.5	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1373.6	31.1
0°-40°	2181.4	49.4
0°-60°	3627.7	82.1
0°-90°	4416.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4416.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1845	1845	1845	1845	1845	
5°	1829	1852	1830	1828	1841	174
15°	1739	1754	1739	1728	1728	490
25°	1564	1570	1545	1524	1517	721
35°	1343	1330	1293	1255	1247	837
45°	1080	1063	1018	969	955	833
55°	810	788	738	690	677	724
65°	537	518	473	431	418	532
75°	278	262	231	207	203	296
85°	63	58	55	55	55	77
90°	0	0	0	0	0	

TEST NUMBER: P1057062

CATALOG NUMBER: CB3R-055D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1844.9	1844.9	1844.9	1844.9	1844.9
2.5°	1835.5	1853.9	1837.6	1839.7	1843.8
5°	1829.2	1852.2	1830.5	1828.1	1841.0
7.5°	1815.0	1836.0	1813.4	1808.2	1819.7
10°	1800.3	1823.4	1797.7	1791.3	1797.7
12.5°	1774.1	1798.2	1777.8	1767.2	1772.6
15°	1738.8	1754.1	1738.8	1728.3	1728.3
17.5°	1695.5	1711.7	1682.7	1675.3	1672.5
20°	1664.1	1678.2	1647.0	1636.5	1632.6
22.5°	1622.1	1635.2	1609.3	1591.4	1586.5
25°	1564.5	1569.6	1544.8	1523.7	1517.3
27.5°	1506.6	1507.9	1473.8	1448.2	1439.7
30°	1458.4	1459.6	1420.4	1392.7	1386.3
32.5°	1410.1	1406.3	1369.0	1336.1	1331.8
35°	1343.0	1330.2	1293.3	1255.1	1247.4
37.5°	1262.1	1254.4	1210.7	1172.4	1160.9
40°	1210.7	1197.9	1153.1	1114.8	1103.3
42.5°	1159.3	1144.5	1098.5	1056.1	1043.5
45°	1079.7	1063.0	1018.1	969.3	955.2
47.5°	999.5	981.3	931.9	884.6	869.0
50°	946.0	926.8	875.3	829.0	812.4
52.5°	891.5	871.3	819.7	772.5	758.9
55°	809.8	788.0	737.7	690.2	677.4
57.5°	728.0	706.5	656.5	611.6	596.2
60°	673.5	653.0	604.0	559.1	543.8
62.5°	617.9	598.5	550.6	506.8	492.4
65°	537.2	518.0	473.0	430.8	418.0
67.5°	457.3	440.9	396.5	357.7	347.5
70°	404.9	389.5	347.2	311.6	301.4
72.5°	354.6	338.2	298.0	267.7	260.5
75°	277.8	262.4	230.6	206.9	203.1
77.5°	207.6	195.0	167.5	154.0	152.0
80°	162.5	150.9	129.7	120.5	120.5
82.5°	120.5	111.1	97.2	93.3	93.3
85°	62.9	57.8	55.0	55.0	55.0
87.5°	18.9	18.9	17.8	16.8	16.8
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)