

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P297636

Luminaire Tested: **D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P297636
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1806-819-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K
Description: D3X LED 1x4 TUNABLE WHITE TROFFER
WITH ROUND PERF LENS
Light Source: (168) 90 CRI LEDS TUNED TO 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3108.0 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.34 / 1.39
Luminous Opening: Rectangular (W 1' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 34.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P297636

CATALOG NUMBER: D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K

Luminous Intensity Polar Plot

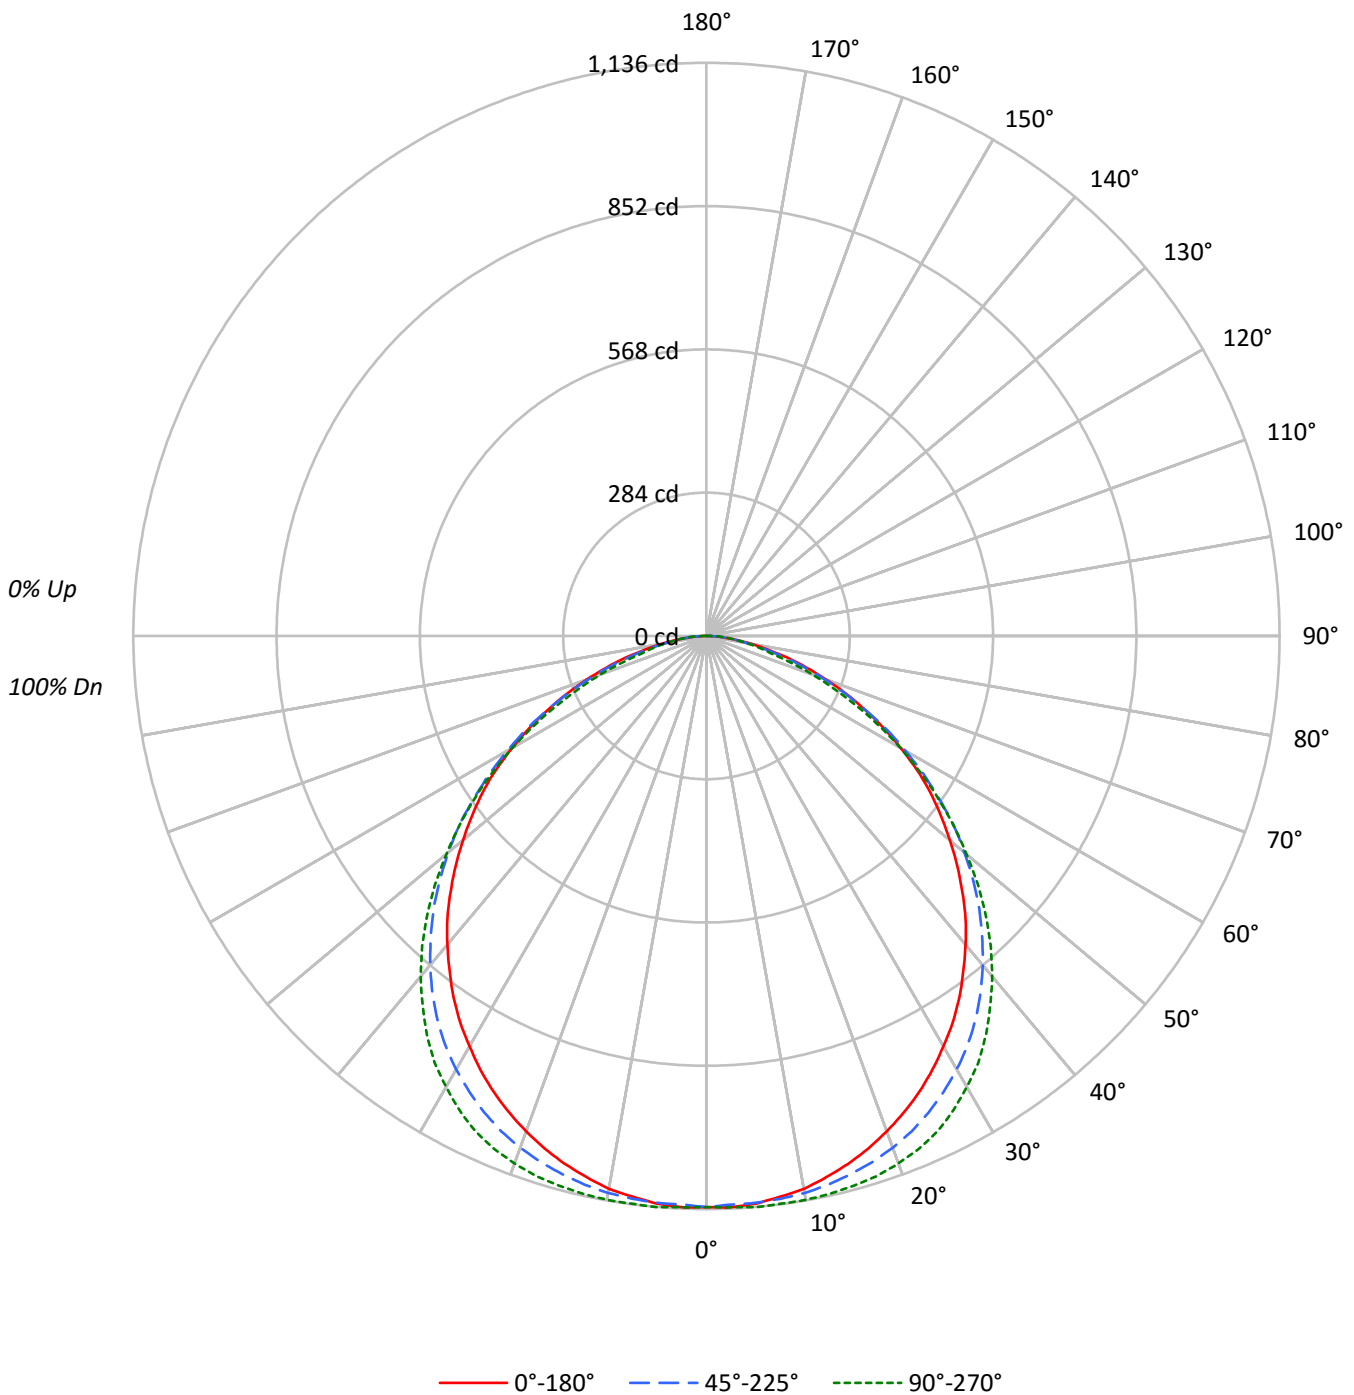



TEST NUMBER: P297636

CATALOG NUMBER: D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	92	94	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	74	71
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61
4	84	72	63	57	81	71	63	56	68	61	56	66	60	55	64	58	54	52
5	77	64	56	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42	54	47	42	52	46	42	40
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35
8	61	48	40	34	60	47	39	34	46	39	34	45	38	33	44	38	33	31
9	57	44	36	31	56	44	36	30	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	53	40	33	28	39	32	27	38	32	27	37	31	27	25

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3046	3046	3046
5°	3051	3047	3069
10°	3040	3063	3101
15°	3019	3076	3142
20°	2992	3091	3186
25°	2962	3094	3217
30°	2918	3082	3207
35°	2871	3053	3172
40°	2807	2992	3095
45°	2730	2909	2978
50°	2637	2794	2817
55°	2545	2643	2630
60°	2397	2449	2390
65°	2208	2217	2094
70°	1976	1932	1758
75°	1717	1601	1356
80°	1376	1247	1247
85°	985	1158	1198



TEST NUMBER: P297636

CATALOG NUMBER: D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.7	3.5
10°-20°	312.5	10.1
20°-30°	479.8	15.4
30°-40°	577.9	18.6
40°-50°	584.0	18.8
50°-60°	498.1	16.0
60°-70°	341.0	11.0
70°-80°	164.6	5.3
80°-90°	42.4	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	900.0	29.0
0°-40°	1477.9	47.6
0°-60°	2560.1	82.4
0°-90°	3108.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3108.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1132	1132	1132	1132	1132	
5°	1129	1129	1128	1135	1136	107
15°	1084	1092	1104	1124	1128	306
25°	998	1013	1042	1072	1084	459
35°	874	894	930	959	966	546
45°	717	737	764	782	782	553
55°	542	552	563	566	560	483
65°	347	351	348	336	329	344
75°	165	165	154	136	130	175
85°	32	35	38	39	39	39
90°	0	0	0	0	0	



TEST NUMBER: P297636

CATALOG NUMBER: D3X-WD-35L93050-LD5-UNV-14-T1-W2A-4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1132.1	1132.1	1132.1	1132.1	1132.1
2.5°	1133.5	1132.1	1127.9	1133.5	1133.5
5°	1129.3	1129.3	1127.9	1134.9	1136.2
7.5°	1121.0	1123.8	1125.1	1133.5	1134.9
10°	1112.7	1115.4	1121.0	1132.1	1134.9
12.5°	1098.8	1104.3	1114.0	1129.3	1132.1
15°	1083.5	1091.8	1104.3	1123.8	1127.9
17.5°	1065.5	1076.6	1093.2	1115.4	1122.4
20°	1044.7	1057.2	1079.4	1104.3	1112.7
22.5°	1022.5	1036.4	1062.7	1091.8	1100.2
25°	997.5	1012.8	1041.9	1072.4	1083.5
27.5°	969.8	986.4	1018.3	1050.2	1059.9
30°	939.2	957.3	992.0	1023.9	1032.2
32.5°	908.7	926.7	962.8	993.3	1003.1
35°	874.0	893.5	929.5	958.7	965.6
37.5°	836.6	856.0	892.1	921.2	924.0
40°	799.1	818.5	851.8	878.2	881.0
42.5°	760.3	778.3	808.8	831.0	833.8
45°	717.3	736.7	764.4	782.5	782.5
47.5°	674.3	693.7	717.3	729.7	729.7
50°	629.9	647.9	667.3	674.3	672.9
52.5°	585.5	602.1	618.8	620.1	617.4
55°	542.5	552.2	563.3	566.0	560.5
57.5°	495.3	503.6	510.5	506.4	502.2
60°	445.3	453.7	455.1	448.1	444.0
62.5°	396.8	403.7	403.7	392.6	385.7
65°	346.8	351.0	348.2	335.7	328.8
67.5°	299.7	302.4	296.9	284.4	273.3
70°	251.1	252.5	245.6	230.3	223.4
72.5°	206.7	208.1	199.8	181.7	173.4
75°	165.1	165.1	154.0	136.0	130.4
77.5°	123.5	127.6	115.2	105.4	105.4
80°	88.8	93.0	80.5	81.9	80.5
82.5°	58.3	62.4	58.3	58.3	58.3
85°	31.9	34.7	37.5	38.8	38.8
87.5°	9.7	16.6	18.0	19.4	22.2
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)