

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P#

Luminaire Tested: **44ID-70-L935-CFR2**

Issue Date: 9/24/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (13890049.01)
Test Lab: INNOVATION CENTER
Issue Date: 9/24/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: 44ID-70-L935-CFR2
Description: 7000 LUMEN 4X4 IN DEPTH LED LUMINAIRE, WITH RECESSED 2IN CUBE LENS
AND 3500K CCT, 90CRI LEDS
Light Source: -
Ballast/Driver:
Luminaire Equipment: Sample No. Condition Description


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6259.0 lumens
Efficiency: N/A
Efficacy: 114.6 lumens/watt
Spacing Criteria (0/90/45): 1.48 / 1.45 / 1.57
Luminous Opening: Rectangular (W 3.88' x L: 3.88' x H: 0')
CIE Type: Direct

Input Watts (W): 54.6
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: 44ID-70-L935-CFR2

Luminous Intensity Polar Plot

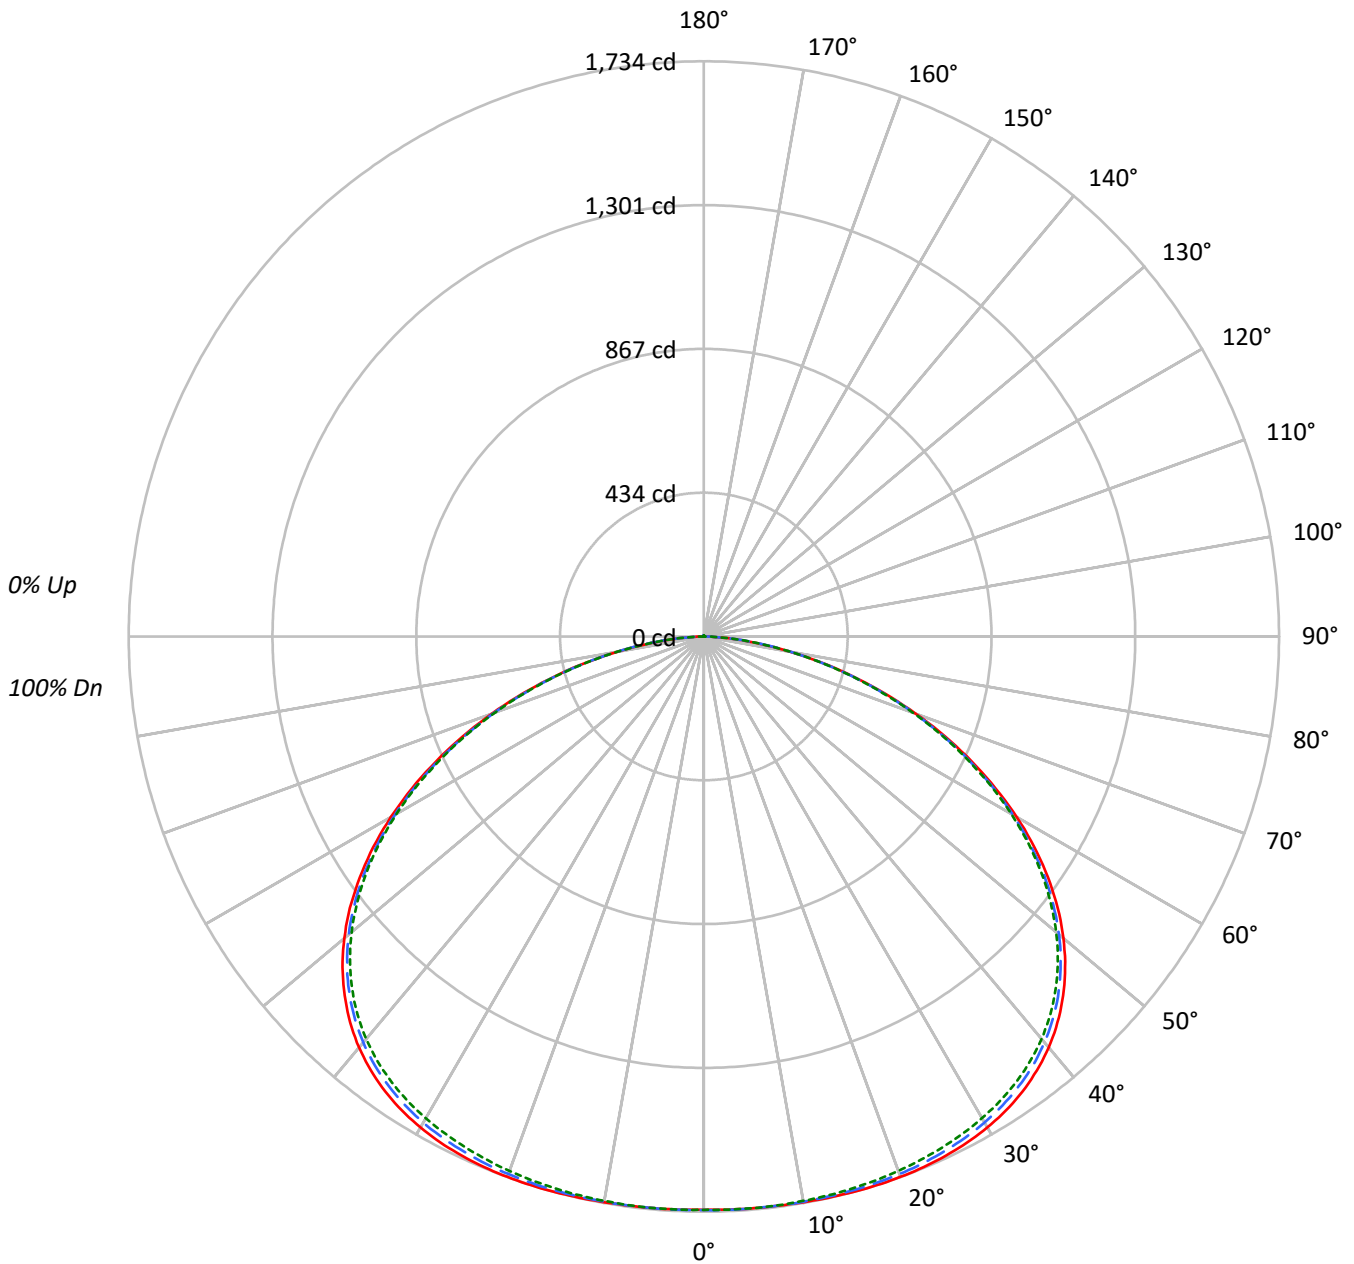



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100								
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	82								
2	98	89	82	76	95	87	81	75	84	78	73	80	76	71	77	73	70	68								
3	89	78	69	62	86	76	68	62	73	66	60	70	64	59	67	63	58	56								
4	81	68	59	52	78	67	58	52	64	57	51	62	55	50	60	54	49	47								
5	74	61	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40								
6	68	54	45	38	66	53	44	38	51	43	38	50	43	37	48	42	37	35								
7	63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30								
8	58	44	36	29	57	44	35	29	42	35	29	41	34	29	40	33	29	27								
9	54	41	32	26	53	40	32	26	39	31	26	38	31	26	37	30	26	24								
10	51	37	29	24	50	37	29	24	36	28	23	35	28	23	34	28	23	21								

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1234	1234	1234
5°	1240	1240	1240
10°	1255	1254	1252
15°	1282	1278	1274
20°	1317	1310	1303
25°	1360	1350	1339
30°	1409	1395	1382
35°	1459	1443	1430
40°	1507	1489	1476
45°	1546	1527	1514
50°	1571	1552	1540
55°	1576	1557	1545
60°	1555	1536	1527
65°	1505	1488	1481
70°	1419	1403	1397
75°	1285	1277	1271
80°	1093	1097	1085
85°	814	834	833



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.2	2.6
10°-20°	489.9	7.8
20°-30°	792.0	12.7
30°-40°	1037.3	16.6
40°-50°	1166.8	18.6
50°-60°	1116.5	17.8
60°-70°	870.8	13.9
70°-80°	490.7	7.8
80°-90°	121.4	1.9
90°-100°	0.4	0.0
100°-110°	0.7	0.0
110°-120°	1.3	0.0
120°-130°	2.0	0.0
130°-140°	1.6	0.0
140°-150°	1.0	0.0
150°-160°	0.7	0.0
160°-170°	0.5	0.0
170°-180°	0.2	0.0
0°-30°	1447.1	23.1
0°-40°	2484.4	39.7
0°-60°	4767.7	76.2
0°-90°	6250.7	99.9
90°-120°	2.4	0.0
90°-150°	6.9	0.1
90°-180°	8.0	0.1
0°-180°	6259.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1729	1729	1729	1729	1729	
5°	1730	1731	1730	1730	1730	165
15°	1734	1734	1729	1726	1724	491
25°	1727	1724	1713	1704	1700	798
35°	1675	1669	1655	1645	1640	1048
45°	1532	1525	1513	1506	1500	1180
55°	1266	1260	1251	1245	1242	1129
65°	891	888	881	878	876	879
75°	466	466	463	462	461	494
85°	99	101	102	103	102	115
90°	1	1	1	1	1	5
95°	0	0	0	0	0	0
105°	1	1	1	1	1	1
115°	1	1	1	1	1	1
125°	2	2	2	2	2	2
135°	2	2	2	2	2	2
145°	2	2	2	1	2	1
155°	2	2	2	2	2	1
165°	2	2	2	2	2	0
175°	2	2	2	2	2	0
180°	2	2	2	2	2	



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1728.6	1728.6	1728.6	1728.6	1728.6
0.5°	1728.1	1729.4	1729.8	1729.4	1728.6
1°	1728.6	1729.4	1729.8	1729.8	1729.0
1.5°	1729.0	1729.8	1729.8	1729.8	1729.4
2°	1729.0	1729.8	1729.8	1730.2	1729.4
2.5°	1729.4	1730.2	1730.2	1730.2	1729.4
3°	1729.8	1730.2	1730.2	1730.2	1729.8
3.5°	1729.8	1730.2	1730.2	1730.2	1729.8
4°	1730.2	1730.2	1730.2	1730.2	1729.8
4.5°	1730.2	1730.7	1730.2	1730.2	1729.8
5°	1730.2	1730.7	1730.2	1730.2	1729.8
5.5°	1730.2	1730.7	1730.2	1730.2	1729.8
6°	1730.7	1730.7	1730.2	1730.2	1729.4
6.5°	1730.7	1731.1	1730.7	1730.2	1729.4
7°	1730.7	1731.1	1730.2	1730.2	1729.4
7.5°	1730.7	1731.1	1730.2	1729.8	1729.0
8°	1731.1	1731.1	1730.7	1729.8	1729.0
8.5°	1731.1	1731.5	1730.2	1729.8	1728.6
9°	1731.5	1731.5	1730.7	1729.4	1728.6
9.5°	1731.5	1731.9	1730.2	1729.4	1728.1
10°	1731.9	1731.9	1730.2	1729.0	1727.7
10.5°	1732.3	1732.3	1730.2	1729.0	1727.7
11°	1732.3	1732.3	1730.2	1728.6	1727.3
11.5°	1732.8	1732.8	1730.2	1728.1	1726.9
12°	1732.8	1732.8	1730.2	1728.1	1726.4
12.5°	1733.2	1732.8	1729.8	1727.7	1726.0
13°	1733.2	1732.8	1729.8	1727.3	1725.6
13.5°	1733.6	1733.2	1729.8	1726.9	1725.2
14°	1733.6	1733.2	1729.8	1726.4	1724.3
14.5°	1734.0	1733.2	1729.4	1726.0	1723.9
15°	1734.0	1733.6	1729.4	1725.6	1723.5
15.5°	1734.5	1733.6	1729.0	1724.8	1722.7
16°	1734.0	1733.6	1728.6	1724.3	1721.8
16.5°	1734.5	1733.6	1728.6	1723.5	1721.0
17°	1734.5	1733.2	1728.1	1722.7	1720.5
17.5°	1734.5	1733.2	1727.3	1722.2	1719.7
18°	1734.5	1733.2	1726.9	1721.4	1718.4
18.5°	1734.5	1732.8	1726.4	1720.5	1717.6
19°	1734.0	1732.8	1726.0	1719.7	1716.7
19.5°	1734.0	1732.3	1725.2	1718.4	1715.5
20°	1733.6	1731.9	1724.3	1717.6	1714.6
20.5°	1733.2	1731.5	1723.9	1716.7	1713.4
21°	1733.2	1731.1	1723.1	1715.5	1712.1



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
22.5°	1731.5	1729.0	1720.1	1711.7	1707.9
23°	1730.7	1728.1	1718.9	1710.4	1706.6
23.5°	1729.8	1727.3	1717.6	1708.7	1704.9
24°	1729.0	1726.4	1716.3	1707.1	1703.3
24.5°	1728.1	1725.2	1715.1	1705.4	1701.6
25°	1726.9	1723.9	1713.4	1703.7	1699.9
25.5°	1725.6	1722.7	1711.7	1702.0	1697.8
26°	1724.3	1721.4	1710.0	1700.3	1696.1
26.5°	1723.1	1719.7	1708.3	1698.2	1694.0
27°	1721.4	1718.0	1706.2	1696.1	1691.9
27.5°	1719.7	1716.3	1704.1	1694.0	1689.8
28°	1718.0	1714.2	1702.0	1691.9	1687.7
28.5°	1715.9	1712.1	1699.9	1689.3	1685.1
29°	1713.8	1710.0	1697.4	1686.8	1682.6
29.5°	1711.7	1707.5	1694.8	1684.3	1679.6
30°	1709.2	1704.9	1691.9	1681.3	1676.7
30.5°	1706.6	1702.4	1688.9	1678.4	1674.2
31°	1703.7	1699.5	1686.0	1675.4	1670.8
31.5°	1701.2	1696.5	1682.6	1672.5	1667.8
32°	1697.8	1693.1	1679.6	1669.1	1664.5
32.5°	1694.4	1689.8	1675.9	1665.3	1660.7
33°	1691.0	1686.0	1672.1	1661.9	1656.9
33.5°	1687.2	1682.2	1668.3	1658.1	1653.1
34°	1683.0	1678.0	1664.0	1653.9	1649.3
34.5°	1678.8	1673.7	1659.8	1649.7	1645.1
35°	1674.6	1669.1	1655.2	1645.1	1640.4
35.5°	1670.0	1664.5	1650.6	1640.4	1635.8
36°	1665.3	1659.4	1645.5	1635.8	1630.7
36.5°	1659.8	1654.4	1640.4	1630.7	1626.1
37°	1654.4	1648.9	1635.0	1625.3	1620.6
37.5°	1648.9	1643.0	1629.5	1619.8	1614.7
38°	1643.0	1637.5	1623.6	1614.3	1609.2
38.5°	1637.1	1631.2	1617.3	1608.0	1603.3
39°	1630.7	1624.4	1610.9	1602.1	1597.0
39.5°	1624.0	1617.7	1604.6	1595.3	1590.7
40°	1616.8	1610.9	1597.4	1588.6	1583.9
40.5°	1610.1	1603.8	1590.3	1581.8	1576.8
41°	1602.5	1596.2	1583.1	1574.2	1569.2
41.5°	1594.5	1588.2	1575.1	1566.7	1561.6
42°	1586.5	1580.2	1567.1	1559.1	1553.6
42.5°	1578.0	1571.7	1558.6	1550.6	1545.6
43°	1569.6	1562.9	1550.2	1542.2	1537.1
43.5°	1560.8	1554.0	1541.4	1533.4	1528.3



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
45°	1531.7	1524.9	1512.7	1505.5	1500.0
45.5°	1521.5	1514.4	1502.6	1495.4	1490.4
46°	1511.0	1503.8	1492.0	1484.9	1479.8
46.5°	1500.0	1492.9	1481.5	1474.3	1469.3
47°	1488.7	1481.9	1470.1	1463.8	1458.3
47.5°	1477.3	1470.1	1458.7	1452.4	1446.9
48°	1465.9	1458.3	1447.3	1440.6	1435.1
48.5°	1453.7	1446.5	1435.5	1429.2	1424.2
49°	1440.6	1433.9	1422.9	1416.1	1411.5
49.5°	1428.0	1421.2	1410.2	1403.9	1398.9
50°	1414.9	1407.7	1397.6	1391.3	1386.2
50.5°	1401.4	1394.2	1384.1	1377.8	1373.1
51°	1387.9	1380.7	1370.6	1364.3	1359.2
51.5°	1373.6	1366.4	1356.3	1350.4	1345.7
52°	1359.2	1352.1	1341.9	1336.5	1331.8
52.5°	1344.9	1337.7	1327.6	1321.7	1317.5
53°	1329.3	1322.6	1313.3	1307.8	1303.2
53.5°	1313.7	1307.0	1297.7	1292.2	1288.0
54°	1298.1	1291.4	1282.1	1276.6	1272.8
54.5°	1282.9	1275.8	1266.9	1261.4	1257.6
55°	1266.5	1259.7	1250.9	1245.4	1241.6
55.5°	1250.0	1243.3	1234.4	1229.0	1225.6
56°	1232.8	1226.4	1217.6	1212.9	1209.6
56.5°	1215.5	1209.6	1200.7	1196.1	1192.7
57°	1198.6	1192.3	1183.8	1179.6	1176.3
57.5°	1181.7	1175.0	1166.6	1162.3	1159.0
58°	1163.2	1156.9	1148.9	1144.6	1141.7
58.5°	1145.1	1139.2	1130.7	1126.9	1124.0
59°	1126.9	1121.0	1113.0	1109.2	1106.3
59.5°	1108.0	1102.5	1094.5	1090.7	1087.7
60°	1089.4	1083.5	1075.9	1072.5	1069.6
60.5°	1070.4	1065.4	1057.4	1054.0	1051.0
61°	1051.0	1046.0	1038.4	1035.0	1032.1
61.5°	1031.2	1027.0	1019.4	1016.1	1013.5
62°	1011.8	1007.6	1000.0	997.1	994.6
62.5°	992.0	987.8	980.2	977.3	974.7
63°	972.2	968.0	960.8	957.9	955.3
63.5°	952.0	947.8	941.0	938.1	935.5
64°	931.7	927.5	920.3	918.2	915.3
64.5°	911.5	907.3	900.1	898.0	895.5
65°	890.8	887.5	880.7	878.2	876.5
65.5°	870.6	866.4	860.1	858.0	855.4
66°	849.1	845.7	839.4	837.3	835.6



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
67.5°	786.7	782.9	777.4	775.3	773.2
68°	765.2	761.8	756.3	754.7	752.6
68.5°	743.7	740.3	734.8	733.6	732.3
69°	722.2	718.8	714.2	712.9	711.2
69.5°	701.1	697.7	693.5	692.3	690.2
70°	679.6	676.7	672.4	671.2	669.1
70.5°	658.1	655.2	651.4	650.1	648.0
71°	636.6	634.1	630.7	629.0	626.9
71.5°	615.5	613.0	609.2	607.9	606.3
72°	594.0	591.9	588.1	587.3	585.2
72.5°	572.5	570.8	567.1	566.2	564.5
73°	551.0	549.3	545.5	544.7	543.4
73.5°	529.9	528.3	524.9	523.6	522.4
74°	508.9	507.6	504.2	503.4	501.7
74.5°	487.4	486.5	483.6	482.3	481.0
75°	465.9	465.9	462.9	462.1	460.8
75.5°	445.2	445.2	442.3	441.4	440.1
76°	424.5	424.5	421.6	420.8	419.1
76.5°	403.7	403.8	401.4	400.5	399.1
77°	383.7	383.9	381.6	380.5	379.1
77.5°	362.3	363.3	361.5	360.5	359.1
78°	342.4	343.6	341.7	340.9	339.8
78.5°	323.6	324.4	323.2	322.2	320.5
79°	303.9	304.5	303.7	302.9	301.3
79.5°	284.5	285.5	285.0	284.2	282.4
80°	265.9	266.7	266.8	265.6	263.9
80.5°	246.3	247.9	248.2	247.0	246.1
81°	228.3	229.7	230.2	229.5	228.3
81.5°	210.5	212.2	212.6	212.2	210.7
82°	192.6	194.7	195.4	195.1	193.4
82.5°	175.6	178.0	178.6	178.4	176.8
83°	159.1	161.6	162.3	162.5	161.1
83.5°	143.1	145.5	146.3	146.6	145.0
84°	127.7	129.9	130.9	131.4	130.1
84.5°	113.2	114.9	116.2	116.7	116.1
85°	99.4	100.7	101.8	102.6	101.7
85.5°	86.1	87.1	87.9	89.1	88.4
86°	73.7	74.7	75.3	76.2	76.2
86.5°	61.9	62.4	62.8	63.9	63.9
87°	50.6	50.6	50.8	52.2	52.2
87.5°	39.0	39.4	39.5	40.8	41.2
88°	27.5	28.5	28.8	29.9	29.8
88.5°	19.5	19.5	19.4	20.6	20.8



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.9	0.9	0.9	1.0	0.9
90.5°	0.3	0.3	0.3	0.3	0.3
91°	0.3	0.3	0.3	0.3	0.3
91.5°	0.4	0.3	0.3	0.3	0.2
92°	0.3	0.3	0.3	0.3	0.3
92.5°	0.3	0.3	0.3	0.3	0.3
93°	0.3	0.3	0.3	0.3	0.3
93.5°	0.4	0.3	0.3	0.3	0.4
94°	0.4	0.3	0.4	0.3	0.4
94.5°	0.4	0.4	0.3	0.4	0.4
95°	0.4	0.3	0.4	0.3	0.4
95.5°	0.3	0.4	0.4	0.4	0.4
96°	0.5	0.5	0.4	0.4	0.4
96.5°	0.5	0.4	0.4	0.4	0.4
97°	0.5	0.4	0.5	0.4	0.5
97.5°	0.5	0.4	0.4	0.4	0.5
98°	0.5	0.5	0.5	0.5	0.5
98.5°	0.5	0.5	0.4	0.4	0.5
99°	0.5	0.5	0.5	0.4	0.5
99.5°	0.5	0.4	0.5	0.5	0.5
100°	0.5	0.5	0.5	0.5	0.5
100.5°	0.5	0.5	0.5	0.5	0.5
101°	0.6	0.5	0.5	0.5	0.5
101.5°	0.6	0.5	0.5	0.5	0.6
102°	0.7	0.5	0.6	0.5	0.6
102.5°	0.6	0.5	0.5	0.6	0.6
103°	0.6	0.5	0.6	0.5	0.6
103.5°	0.6	0.6	0.6	0.6	0.5
104°	0.7	0.6	0.6	0.6	0.5
104.5°	0.6	0.7	0.7	0.7	0.6
105°	0.8	0.7	0.6	0.7	0.7
105.5°	0.7	0.6	0.7	0.6	0.6
106°	0.7	0.7	0.7	0.7	0.8
106.5°	0.8	0.7	0.7	0.7	0.6
107°	0.7	0.7	0.8	0.8	0.7
107.5°	0.8	0.7	0.8	0.8	0.8
108°	0.8	0.7	0.7	0.8	0.7
108.5°	0.8	0.8	0.8	0.8	0.7
109°	0.8	0.8	0.8	0.8	0.8
109.5°	0.9	0.8	0.9	0.8	0.8
110°	0.8	0.8	0.8	0.9	0.8
110.5°	0.9	0.8	0.9	0.9	0.9
111°	0.9	0.9	0.9	0.9	0.9



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1.0	1.1	1.1	1.1	1.0
113°	1.1	1.0	1.0	1.1	1.1
113.5°	1.1	1.1	1.1	1.2	1.2
114°	1.2	1.2	1.2	1.2	1.2
114.5°	1.3	1.3	1.2	1.2	1.1
115°	1.3	1.3	1.2	1.3	1.2
115.5°	1.4	1.3	1.3	1.3	1.2
116°	1.3	1.4	1.4	1.3	1.3
116.5°	1.4	1.4	1.4	1.4	1.4
117°	1.5	1.5	1.5	1.5	1.3
117.5°	1.6	1.5	1.6	1.5	1.4
118°	1.6	1.6	1.6	1.6	1.5
118.5°	1.7	1.6	1.6	1.6	1.6
119°	1.7	1.7	1.8	1.6	1.6
119.5°	1.8	1.8	1.8	1.7	1.7
120°	1.9	1.9	1.8	1.8	1.8
120.5°	1.9	1.8	1.9	1.9	1.8
121°	1.9	1.9	1.9	1.9	1.8
121.5°	2.1	2.0	2.0	1.9	1.9
122°	2.0	2.1	2.0	2.0	2.0
122.5°	2.2	2.1	2.1	2.1	2.0
123°	2.2	2.2	2.1	2.1	2.1
123.5°	2.2	2.3	2.2	2.1	2.2
124°	2.2	2.3	2.2	2.2	2.2
124.5°	2.4	2.3	2.2	2.2	2.2
125°	2.4	2.4	2.3	2.3	2.3
125.5°	2.4	2.4	2.3	2.3	2.3
126°	2.4	2.4	2.3	2.3	2.3
126.5°	2.4	2.4	2.4	2.3	2.4
127°	2.4	2.4	2.4	2.3	2.3
127.5°	2.5	2.5	2.4	2.3	2.3
128°	2.5	2.4	2.4	2.3	2.4
128.5°	2.4	2.4	2.4	2.3	2.4
129°	2.4	2.4	2.4	2.3	2.3
129.5°	2.4	2.4	2.4	2.3	2.3
130°	2.4	2.4	2.3	2.2	2.3
130.5°	2.4	2.4	2.4	2.2	2.3
131°	2.3	2.3	2.3	2.2	2.2
131.5°	2.4	2.3	2.2	2.2	2.2
132°	2.3	2.2	2.2	2.2	2.2
132.5°	2.3	2.2	2.2	2.2	2.2
133°	2.2	2.2	2.2	2.0	2.1
133.5°	2.3	2.2	2.1	2.0	2.1



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
135°	2.2	2.1	2.0	1.9	2.1
135.5°	2.1	2.1	2.0	1.9	2.0
136°	2.0	2.0	1.9	1.8	2.0
136.5°	2.1	2.0	1.9	1.8	2.0
137°	2.0	1.9	1.9	1.8	1.9
137.5°	2.0	1.9	1.9	1.7	1.9
138°	1.9	1.9	1.8	1.7	1.9
138.5°	2.0	1.9	1.8	1.7	1.8
139°	1.7	1.8	1.8	1.6	1.9
139.5°	1.9	1.7	1.7	1.6	1.8
140°	1.8	1.7	1.7	1.6	1.7
140.5°	1.8	1.7	1.7	1.6	1.7
141°	1.7	1.7	1.6	1.5	1.6
141.5°	1.6	1.7	1.7	1.5	1.6
142°	1.6	1.6	1.6	1.6	1.5
142.5°	1.6	1.6	1.6	1.5	1.5
143°	1.6	1.6	1.6	1.6	1.5
143.5°	1.6	1.6	1.6	1.5	1.5
144°	1.6	1.5	1.6	1.4	1.5
144.5°	1.6	1.5	1.6	1.5	1.5
145°	1.6	1.5	1.6	1.4	1.5
145.5°	1.6	1.5	1.5	1.4	1.6
146°	1.6	1.5	1.4	1.4	1.5
146.5°	1.6	1.5	1.4	1.4	1.5
147°	1.6	1.5	1.4	1.4	1.4
147.5°	1.5	1.5	1.4	1.4	1.6
148°	1.6	1.5	1.4	1.4	1.6
148.5°	1.6	1.5	1.4	1.4	1.6
149°	1.6	1.5	1.4	1.4	1.6
149.5°	1.6	1.4	1.4	1.4	1.6
150°	1.6	1.5	1.4	1.4	1.6
150.5°	1.6	1.5	1.4	1.4	1.6
151°	1.6	1.5	1.4	1.4	1.6
151.5°	1.6	1.5	1.4	1.4	1.6
152°	1.6	1.5	1.5	1.5	1.6
152.5°	1.6	1.6	1.4	1.5	1.6
153°	1.6	1.5	1.5	1.6	1.7
153.5°	1.7	1.6	1.4	1.5	1.6
154°	1.6	1.6	1.5	1.5	1.6
154.5°	1.6	1.5	1.5	1.6	1.7
155°	1.6	1.6	1.6	1.6	1.7
155.5°	1.6	1.5	1.5	1.6	1.7
156°	1.6	1.6	1.6	1.6	1.7



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
157.5°	1.6	1.5	1.5	1.6	1.6
158°	1.7	1.6	1.5	1.6	1.7
158.5°	1.6	1.6	1.5	1.6	1.6
159°	1.6	1.6	1.5	1.6	1.7
159.5°	1.6	1.5	1.5	1.6	1.8
160°	1.6	1.6	1.5	1.6	1.7
160.5°	1.6	1.5	1.5	1.6	1.7
161°	1.6	1.5	1.5	1.6	1.7
161.5°	1.6	1.6	1.5	1.5	1.6
162°	1.6	1.5	1.6	1.6	1.6
162.5°	1.6	1.6	1.6	1.6	1.6
163°	1.6	1.6	1.6	1.6	1.6
163.5°	1.6	1.6	1.6	1.6	1.7
164°	1.6	1.6	1.6	1.7	1.7
164.5°	1.5	1.6	1.6	1.7	1.7
165°	1.6	1.6	1.5	1.6	1.7
165.5°	1.5	1.6	1.5	1.8	1.7
166°	1.6	1.6	1.6	1.7	1.6
166.5°	1.6	1.6	1.5	1.7	1.6
167°	1.6	1.7	1.6	1.8	1.7
167.5°	1.6	1.7	1.6	1.8	1.7
168°	1.6	1.6	1.6	1.8	1.7
168.5°	1.6	1.7	1.6	1.9	1.7
169°	1.7	1.7	1.6	1.9	1.7
169.5°	1.7	1.7	1.6	1.9	1.8
170°	1.7	1.7	1.6	1.9	1.7
170.5°	1.7	1.8	1.6	1.9	1.8
171°	1.7	1.7	1.7	1.9	1.9
171.5°	1.7	1.7	1.7	1.9	1.8
172°	1.7	1.7	1.8	1.9	1.8
172.5°	1.8	1.8	1.8	1.9	1.8
173°	1.7	1.7	1.8	1.9	1.9
173.5°	1.8	1.8	1.9	1.9	1.9
174°	1.9	1.9	2.0	1.9	1.9
174.5°	1.9	1.9	1.9	2.0	1.9
175°	2.0	1.9	2.0	2.0	1.9
175.5°	2.0	1.9	2.1	2.0	2.0
176°	2.1	2.0	2.0	1.9	1.9
176.5°	2.1	2.0	2.0	1.9	1.9
177°	2.0	2.0	1.9	1.9	1.9
177.5°	2.1	2.0	1.9	1.8	2.0
178°	1.9	1.9	1.8	1.8	1.9
178.5°	1.9	1.9	1.8	1.8	1.8



TEST NUMBER: P#

CATALOG NUMBER: 44ID-70-L935-CFR2

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
180°	1.6	1.6	1.6	1.6	1.6



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







21.5°	1732.8	1730.7	1722.2	1714.2	1710.8
22°	1731.9	1729.8	1721.0	1713.0	1709.6



44°	1551.1	1544.7	1532.1	1524.5	1519.4
44.5°	1541.4	1534.6	1522.8	1514.8	1509.7



66.5°	828.4	825.1	818.7	816.6	814.5
67°	807.8	804.0	798.1	796.0	794.3



89°	12.3	12.1	12.0	12.6	12.8
89.5°	5.4	5.5	5.4	5.8	5.7



111.5°	1.1	0.9	1.0	1.0	0.9
112°	1.1	1.0	1.0	1.0	1.1



134°	2.2	2.1	2.1	2.0	2.2
134.5°	2.2	2.1	2.1	1.9	2.0



156.5°	1.6	1.5	1.6	1.6	1.6
157°	1.6	1.5	1.6	1.6	1.6



179°	1.8	1.8	1.7	1.7	1.8
179.5°	1.6	1.7	1.6	1.6	1.7



(END OF REPORT)