

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1217195

Luminaire Tested: 14-ID2-35-CNV-L840-U

Issue Date: 12/5/2025

Test Information

Test Method: LM-79-2019
Report Number: P1217195
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2508-507-11)
Test Lab: INNOVATION CENTER
Issue Date: 12/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: 14-ID2-35-CNV-L840-U
Description: 1X4 IN DEPTH TROFFER WITH 2INCH CURVE DROP LENS
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3732.6 lumens
Efficiency: N/A
Efficacy: 122.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.33
Luminous Opening: Rectangular w/ Sides (W: 1' x L: 4' x H: 0.16')
CIE Type: Direct

Input Watts (W): 30.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P1217195
CATALOG NUMBER: 14-ID2-35-CNV-L840-U

Luminous Intensity Polar Plot

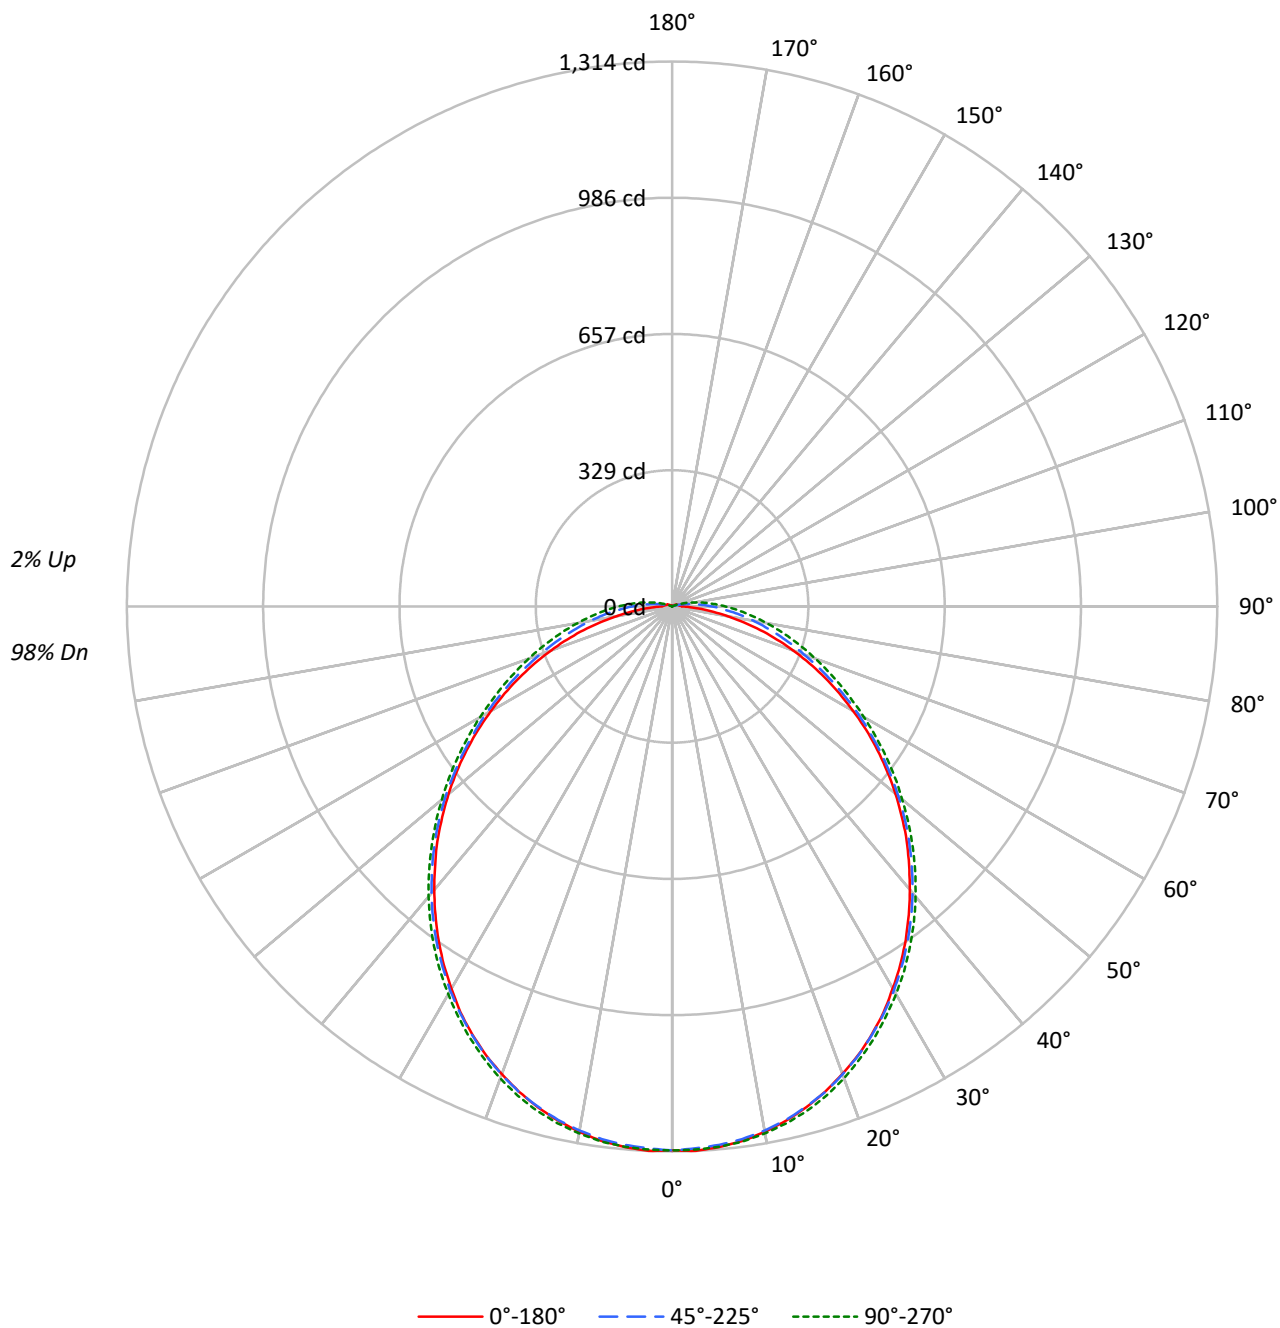

TEST NUMBER: P1217195

CATALOG NUMBER: 14-ID2-35-CNV-L840-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110	105	105	105	100	100	100	100	100	98
1	107	102	98	94	104	100	96	92	95	92	88	91	88	85	87	84	82	82	82	80
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69	69	69	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	60	67	62	58	58	58	56
4	81	69	60	54	79	68	59	53	65	58	52	62	56	51	60	54	50	50	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	49	44	54	48	44	44	44	41
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	38	38	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	34	34	32
8	60	46	38	32	58	45	37	32	44	37	31	42	36	31	41	35	31	31	31	29
9	56	42	34	29	54	42	34	29	40	33	28	39	33	28	38	32	28	28	28	26
10	52	39	31	26	51	39	31	26	37	30	26	36	30	25	35	29	25	25	25	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3529	3529	3529
5°	3522	3478	3484
10°	3490	3421	3428
15°	3445	3352	3363
20°	3387	3271	3277
25°	3320	3176	3178
30°	3230	3072	3070
35°	3136	2956	2955
40°	3031	2832	2828
45°	2928	2699	2691
50°	2808	2554	2546
55°	2682	2395	2401
60°	2536	2238	2253
65°	2381	2073	2118
70°	2202	1916	2006
75°	1993	1798	1920
80°	1720	1710	1881
85°	1502	1680	1924

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2928 cd/sqm

TEST NUMBER: P1217195
 CATALOG NUMBER: 14-ID2-35-CNV-L840-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.0	3.3
10°-20°	352.8	9.5
20°-30°	525.8	14.1
30°-40°	618.7	16.6
40°-50°	624.3	16.7
50°-60°	550.4	14.7
60°-70°	421.6	11.3
70°-80°	276.1	7.4
80°-90°	147.6	4.0
90°-100°	62.7	1.7
100°-110°	20.0	0.5
110°-120°	4.7	0.1
120°-130°	2.1	0.1
130°-140°	1.1	0.0
140°-150°	0.4	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1002.6	26.9
0°-40°	1621.4	43.4
0°-60°	2796.1	74.9
0°-90°	3641.5	97.6
90°-120°	87.5	2.3
90°-150°	91.1	2.4
90°-180°	91.0	2.4
0°-180°	3732.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1312	1312	1312	1312	1312	
5°	1308	1306	1303	1304	1308	124
15°	1250	1249	1249	1254	1259	352
25°	1139	1137	1140	1146	1150	524
35°	981	981	989	997	1000	614
45°	800	801	810	819	820	616
55°	604	604	614	626	629	540
65°	406	408	424	440	447	402
75°	220	229	264	288	295	234
85°	71	97	142	169	176	72
90°	25	55	96	121	129	16
95°	21	28	59	82	89	16
105°	14	11	13	25	30	15
115°	9	8	4	0	0	9
125°	6	4	2	0	0	5
135°	3	2	1	0	0	3
145°	2	1	0	0	0	1
155°	0	0	0	0	0	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0

TEST NUMBER: P1217195

CATALOG NUMBER: 14-ID2-35-CNV-L840-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1311.5	1311.5	1311.5	1311.5	1311.5
2.5°	1314.0	1312.1	1307.7	1309.0	1310.9
5°	1308.3	1306.5	1303.3	1304.0	1307.7
7.5°	1300.2	1297.7	1295.2	1297.0	1301.4
10°	1286.4	1285.1	1283.2	1285.8	1290.1
12.5°	1270.1	1268.8	1268.2	1271.3	1276.3
15°	1250.0	1248.7	1248.7	1253.8	1258.8
17.5°	1226.8	1226.1	1227.4	1233.0	1236.8
20°	1199.8	1199.2	1201.0	1206.7	1211.1
22.5°	1171.5	1170.3	1172.2	1177.2	1181.6
25°	1138.9	1137.0	1140.2	1145.8	1150.2
27.5°	1103.8	1100.6	1105.7	1111.9	1115.7
30°	1063.6	1064.2	1069.3	1075.5	1079.3
32.5°	1024.1	1023.5	1029.7	1037.3	1041.0
35°	981.4	981.4	988.9	997.1	1000.2
37.5°	936.9	938.7	946.3	953.8	957.6
40°	891.7	894.2	901.7	909.9	913.0
42.5°	845.2	847.8	855.9	864.7	867.2
45°	800.1	800.7	809.5	818.9	820.1
47.5°	751.1	751.7	761.2	770.6	772.5
50°	702.8	703.4	712.8	722.9	724.1
52.5°	653.9	654.5	662.6	674.6	677.1
55°	604.3	604.3	613.7	626.2	628.8
57.5°	554.7	554.7	564.8	577.9	581.1
60°	503.9	505.1	517.7	530.2	534.6
62.5°	454.9	456.2	470.0	483.2	488.8
65°	406.0	407.9	424.2	439.9	446.8
67.5°	358.3	360.8	379.6	399.7	406.0
70°	310.6	315.6	338.2	360.2	367.1
72.5°	264.8	270.5	300.6	323.8	330.1
75°	220.3	229.0	264.2	288.0	294.9
77.5°	177.0	190.1	230.3	256.0	262.3
80°	136.2	155.6	198.9	224.6	231.5
82.5°	101.7	123.6	170.1	196.4	202.7
85°	70.9	97.3	142.4	169.4	176.3
87.5°	45.8	74.7	118.0	144.3	151.9
90°	25.1	55.2	96.0	121.1	128.6
92.5°	22.6	40.2	76.6	100.4	107.9
95°	20.7	28.2	59.0	81.6	89.1
97.5°	18.8	18.8	43.9	64.6	71.5
100°	17.6	13.8	31.4	49.6	56.5
102.5°	15.7	12.6	20.7	36.4	42.7
105°	14.4	11.3	12.6	25.1	30.1
107.5°	13.2	10.0	6.3	15.7	20.1
110°	11.9	9.4	5.0	7.5	11.9

TEST NUMBER: P1217195

CATALOG NUMBER: 14-ID2-35-CNV-L840-U

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	10.7	8.2	4.4	1.9	4.4
115°	9.4	7.5	3.8	0.0	0.0
117.5°	8.2	6.9	3.1	0.0	0.0
120°	7.5	5.6	3.1	0.0	0.0
122.5°	6.9	5.0	2.5	0.0	0.0
125°	5.6	4.4	1.9	0.0	0.0
127.5°	5.0	3.8	1.9	0.0	0.0
130°	4.4	3.8	1.3	0.0	0.0
132.5°	3.8	3.1	1.3	0.0	0.0
135°	3.1	2.5	1.3	0.0	0.0
137.5°	3.1	2.5	0.6	0.0	0.0
140°	2.5	1.9	0.6	0.0	0.0
142.5°	1.9	1.3	0.6	0.0	0.0
145°	1.9	1.3	0.0	0.0	0.0
147.5°	1.3	1.3	0.0	0.0	0.0
150°	1.3	0.6	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1217195

CATALOG NUMBER: 14-ID2-35-CNV-L840-U

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.45	16.04	14.85	16.40	16.78	15.09	16.68	15.49	17.05	17.42
	3H	16.04	17.49	16.46	17.87	18.29	17.06	18.51	17.48	18.89	19.31
	4H	16.61	17.98	17.05	18.38	18.81	17.96	19.32	18.40	19.72	20.16
	6H	17.01	18.28	17.46	18.69	19.14	18.83	20.10	19.28	20.52	20.97
	8H	17.13	18.34	17.59	18.78	19.24	19.26	20.47	19.72	20.91	21.36
	12H	17.21	18.38	17.68	18.81	19.29	19.70	20.86	20.16	21.29	21.78
4H	2H	15.09	16.45	15.52	16.85	17.28	15.60	16.97	16.04	17.36	17.80
	3H	16.91	18.06	17.36	18.51	18.97	17.81	18.96	18.26	19.41	19.87
	4H	17.60	18.65	18.07	19.11	19.60	18.86	19.91	19.33	20.37	20.86
	6H	18.12	19.05	18.61	19.53	20.04	19.91	20.84	20.41	21.32	21.83
	8H	18.29	19.16	18.79	19.65	20.17	20.43	21.30	20.93	21.78	22.30
	12H	18.42	19.20	18.94	19.72	20.25	20.98	21.76	21.49	22.28	22.80
8H	4H	18.03	18.89	18.52	19.38	19.90	19.13	20.00	19.63	20.49	21.01
	6H	18.70	19.43	19.23	19.96	20.49	20.36	21.09	20.89	21.62	22.15
	8H	18.95	19.61	19.49	20.16	20.70	21.00	21.66	21.54	22.21	22.75
	12H	19.16	19.75	19.70	20.28	20.89	21.71	22.30	22.26	22.83	23.44
12H	4H	18.12	18.90	18.64	19.42	19.95	19.16	19.94	19.68	20.46	20.99
	6H	18.85	19.51	19.40	20.06	20.60	20.41	21.07	20.96	21.62	22.16
	8H	19.19	19.77	19.73	20.30	20.92	21.13	21.72	21.68	22.25	22.86

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Corelite

Report Number: SP1-2506-458-5

Test Date: 08/26/2025

Luminaire Tested: 22ID2-55-CFR1-L840-U

Data in this report applies to families of products including 22ID2-55-CFR1-L840-U

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-458-5
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/27/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Corelite
 Catalog Number: **22ID2-55-CFR1-L840-U**
 Description: 2X2 CGTX WITH INDEPTH FRAME AND CFR1 LENS - 5500 LUMEN 4000K 80CRI

Spectral Parameters

CCT (K): 3915
 CIE u' : 0.2259
 CIE v' : 0.5051
 Duv: 0.0015
 CIE x: 0.3854
 CIE y: 0.3830
 CIE z: 0.2316
 Peak Wavelength (nm): 453
 Dominant Wavelength (nm): 578
 Purity: 30.6207
 R_f: 83.2
 R_g: 94.6

CRI (Ra): 82.3
 R1: 80.6
 R2: 88.9
 R3: 94.6
 R4: 80.5
 R5: 80.0
 R6: 84.0
 R7: 86.1
 R8: 64.0
 R9: 7.6
 R10: 72.9
 R11: 78.7
 R12: 57.3
 R13: 82.7
 R14: 97.1
 R15: 74.3



Test Conditions

Stabilization Time: 34M
 Operation Time: 1H 34M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2506-458-5

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-458-5

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2506-458-5

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	266	NR	620	755	NR	750	24	NR	880	1	NR
365	0	NR	495	307	NR	625	710	NR	755	21	NR	885	0	NR
370	0	NR	500	366	NR	630	663	NR	760	18	NR	890	0	NR
375	0	NR	505	430	NR	635	612	NR	765	15	NR	895	0	NR
380	0	NR	510	486	NR	640	561	NR	770	13	NR	900	0	NR
385	0	NR	515	536	NR	645	509	NR	775	11	NR	905	0	NR
390	1	NR	520	571	NR	650	458	NR	780	10	NR	910	0	NR
395	3	NR	525	600	NR	655	410	NR	785	8	NR	915	0	NR
400	5	NR	530	624	NR	660	363	NR	790	7	NR	920	0	NR
405	7	NR	535	645	NR	665	321	NR	795	6	NR	925	0	NR
410	10	NR	540	661	NR	670	280	NR	800	5	NR	930	0	NR
415	16	NR	545	681	NR	675	244	NR	805	5	NR	935	0	NR
420	30	NR	550	701	NR	680	213	NR	810	4	NR	940	0	NR
425	53	NR	555	724	NR	685	183	NR	815	3	NR	945	0	NR
430	95	NR	560	747	NR	690	159	NR	820	3	NR	950	0	NR
435	170	NR	565	772	NR	695	136	NR	825	3	NR	955	0	NR
440	289	NR	570	795	NR	700	117	NR	830	2	NR	960	0	NR
445	522	NR	575	817	NR	705	100	NR	835	2	NR	965	0	NR
450	895	NR	580	841	NR	710	85	NR	840	2	NR	970	0	NR
455	957	NR	585	857	NR	715	72	NR	845	1	NR	975	0	NR
460	642	NR	590	871	NR	720	62	NR	850	1	NR	980	0	NR
465	487	NR	595	875	NR	725	53	NR	855	1	NR	985	0	NR
470	397	NR	600	866	NR	730	45	NR	860	1	NR	990	0	NR
475	289	NR	605	852	NR	735	39	NR	865	1	NR	995	0	NR
480	241	NR	610	827	NR	740	33	NR	870	1	NR	1000	0	NR
485	245	NR	615	796	NR	745	28	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-5

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.65

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	266	NR	620	755	NR	750	24	NR	880	1	NR
365	0	NR	495	307	NR	625	710	NR	755	21	NR	885	0	NR
370	0	NR	500	366	NR	630	663	NR	760	18	NR	890	0	NR
375	0	NR	505	430	NR	635	612	NR	765	15	NR	895	0	NR
380	0	NR	510	486	NR	640	561	NR	770	13	NR	900	0	NR
385	0	NR	515	536	NR	645	509	NR	775	11	NR	905	0	NR
390	1	NR	520	571	NR	650	458	NR	780	10	NR	910	0	NR
395	3	NR	525	600	NR	655	410	NR	785	8	NR	915	0	NR
400	5	NR	530	624	NR	660	363	NR	790	7	NR	920	0	NR
405	7	NR	535	645	NR	665	321	NR	795	6	NR	925	0	NR
410	10	NR	540	661	NR	670	280	NR	800	5	NR	930	0	NR
415	16	NR	545	681	NR	675	244	NR	805	5	NR	935	0	NR
420	30	NR	550	701	NR	680	213	NR	810	4	NR	940	0	NR
425	53	NR	555	724	NR	685	183	NR	815	3	NR	945	0	NR
430	95	NR	560	747	NR	690	159	NR	820	3	NR	950	0	NR
435	170	NR	565	772	NR	695	136	NR	825	3	NR	955	0	NR
440	289	NR	570	795	NR	700	117	NR	830	2	NR	960	0	NR
445	522	NR	575	817	NR	705	100	NR	835	2	NR	965	0	NR
450	895	NR	580	841	NR	710	85	NR	840	2	NR	970	0	NR
455	957	NR	585	857	NR	715	72	NR	845	1	NR	975	0	NR
460	642	NR	590	871	NR	720	62	NR	850	1	NR	980	0	NR
465	487	NR	595	875	NR	725	53	NR	855	1	NR	985	0	NR
470	397	NR	600	866	NR	730	45	NR	860	1	NR	990	0	NR
475	289	NR	605	852	NR	735	39	NR	865	1	NR	995	0	NR
480	241	NR	610	827	NR	740	33	NR	870	1	NR	1000	0	NR
485	245	NR	615	796	NR	745	28	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-5

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 3.36


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	266	NR	620	755	NR	750	24	NR	880	1	NR
365	0	NR	495	307	NR	625	710	NR	755	21	NR	885	0	NR
370	0	NR	500	366	NR	630	663	NR	760	18	NR	890	0	NR
375	0	NR	505	430	NR	635	612	NR	765	15	NR	895	0	NR
380	0	NR	510	486	NR	640	561	NR	770	13	NR	900	0	NR
385	0	NR	515	536	NR	645	509	NR	775	11	NR	905	0	NR
390	1	NR	520	571	NR	650	458	NR	780	10	NR	910	0	NR
395	3	NR	525	600	NR	655	410	NR	785	8	NR	915	0	NR
400	5	NR	530	624	NR	660	363	NR	790	7	NR	920	0	NR
405	7	NR	535	645	NR	665	321	NR	795	6	NR	925	0	NR
410	10	NR	540	661	NR	670	280	NR	800	5	NR	930	0	NR
415	16	NR	545	681	NR	675	244	NR	805	5	NR	935	0	NR
420	30	NR	550	701	NR	680	213	NR	810	4	NR	940	0	NR
425	53	NR	555	724	NR	685	183	NR	815	3	NR	945	0	NR
430	95	NR	560	747	NR	690	159	NR	820	3	NR	950	0	NR
435	170	NR	565	772	NR	695	136	NR	825	3	NR	955	0	NR
440	289	NR	570	795	NR	700	117	NR	830	2	NR	960	0	NR
445	522	NR	575	817	NR	705	100	NR	835	2	NR	965	0	NR
450	895	NR	580	841	NR	710	85	NR	840	2	NR	970	0	NR
455	957	NR	585	857	NR	715	72	NR	845	1	NR	975	0	NR
460	642	NR	590	871	NR	720	62	NR	850	1	NR	980	0	NR
465	487	NR	595	875	NR	725	53	NR	855	1	NR	985	0	NR
470	397	NR	600	866	NR	730	45	NR	860	1	NR	990	0	NR
475	289	NR	605	852	NR	735	39	NR	865	1	NR	995	0	NR
480	241	NR	610	827	NR	740	33	NR	870	1	NR	1000	0	NR
485	245	NR	615	796	NR	745	28	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-5


TM-30-18

Summary

$R_f = 83.2$
 $R_g = 94.6$
 $CIE R_a = 82.3$
 $R_g = 7.6$

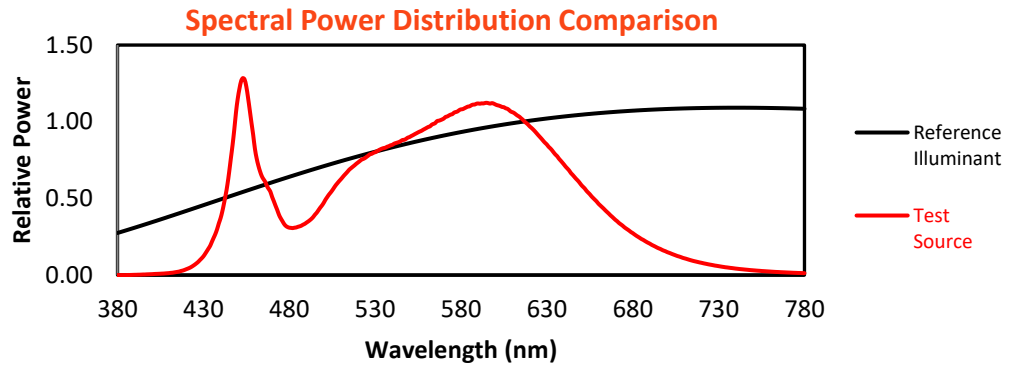

Color Vector Graphics

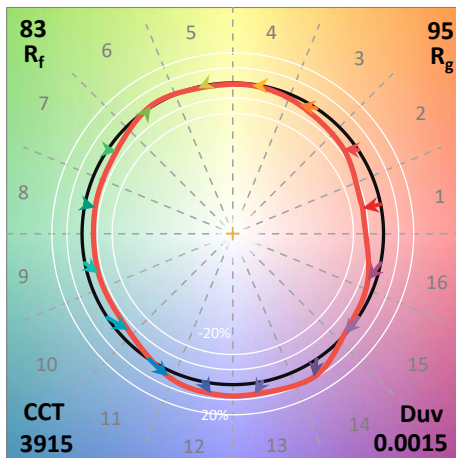

Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 83	CES51 = 92	CES76 = 75
CES02 = 61	CES27 = 91	CES52 = 93	CES77 = 82
CES03 = 31	CES28 = 91	CES53 = 88	CES78 = 74
CES04 = 70	CES29 = 90	CES54 = 88	CES79 = 92
CES05 = 48	CES30 = 90	CES55 = 85	CES80 = 89
CES06 = 50	CES31 = 91	CES56 = 83	CES81 = 81
CES07 = 41	CES32 = 83	CES57 = 82	CES82 = 95
CES08 = 40	CES33 = 97	CES58 = 82	CES83 = 96
CES09 = 29	CES34 = 87	CES59 = 90	CES84 = 90
CES10 = 74	CES35 = 92	CES60 = 88	CES85 = 77
CES11 = 57	CES36 = 78	CES61 = 85	CES86 = 75
CES12 = 63	CES37 = 91	CES62 = 79	CES87 = 84
CES13 = 42	CES38 = 84	CES63 = 82	CES88 = 89
CES14 = 74	CES39 = 98	CES64 = 75	CES89 = 77
CES15 = 71	CES40 = 96	CES65 = 74	CES90 = 90
CES16 = 47	CES41 = 95	CES66 = 70	CES91 = 67
CES17 = 49	CES42 = 93	CES67 = 69	CES92 = 64
CES18 = 56	CES43 = 91	CES68 = 76	CES93 = 78
CES19 = 71	CES44 = 99	CES69 = 80	CES94 = 63
CES20 = 65	CES45 = 94	CES70 = 72	CES95 = 72
CES21 = 86	CES46 = 91	CES71 = 64	CES96 = 84
CES22 = 78	CES47 = 95	CES72 = 88	CES97 = 91
CES23 = 91	CES48 = 83	CES73 = 66	CES98 = 86
CES24 = 90	CES49 = 90	CES74 = 90	CES99 = 77
CES25 = 71	CES50 = 93	CES75 = 68	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)