

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1217223

Luminaire Tested: 14-ID2-50-CNV-L940-U

Issue Date: 12/5/2025

Test Information

Test Method: LM-79-2019
Report Number: P1217223
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2508-507-11)
Test Lab: INNOVATION CENTER
Issue Date: 12/5/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: 14-ID2-50-CNV-L940-U
Description: 1X4 IN DEPTH TROFFER WITH 2INCH CURVE DROP LENS
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4547.5 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.33
Luminous Opening: Rectangular w/ Sides (W: 1' x L: 4' x H: 0.16')
CIE Type: Direct

Input Watts (W): 44.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P1217223
CATALOG NUMBER: 14-ID2-50-CNV-L940-U

Luminous Intensity Polar Plot

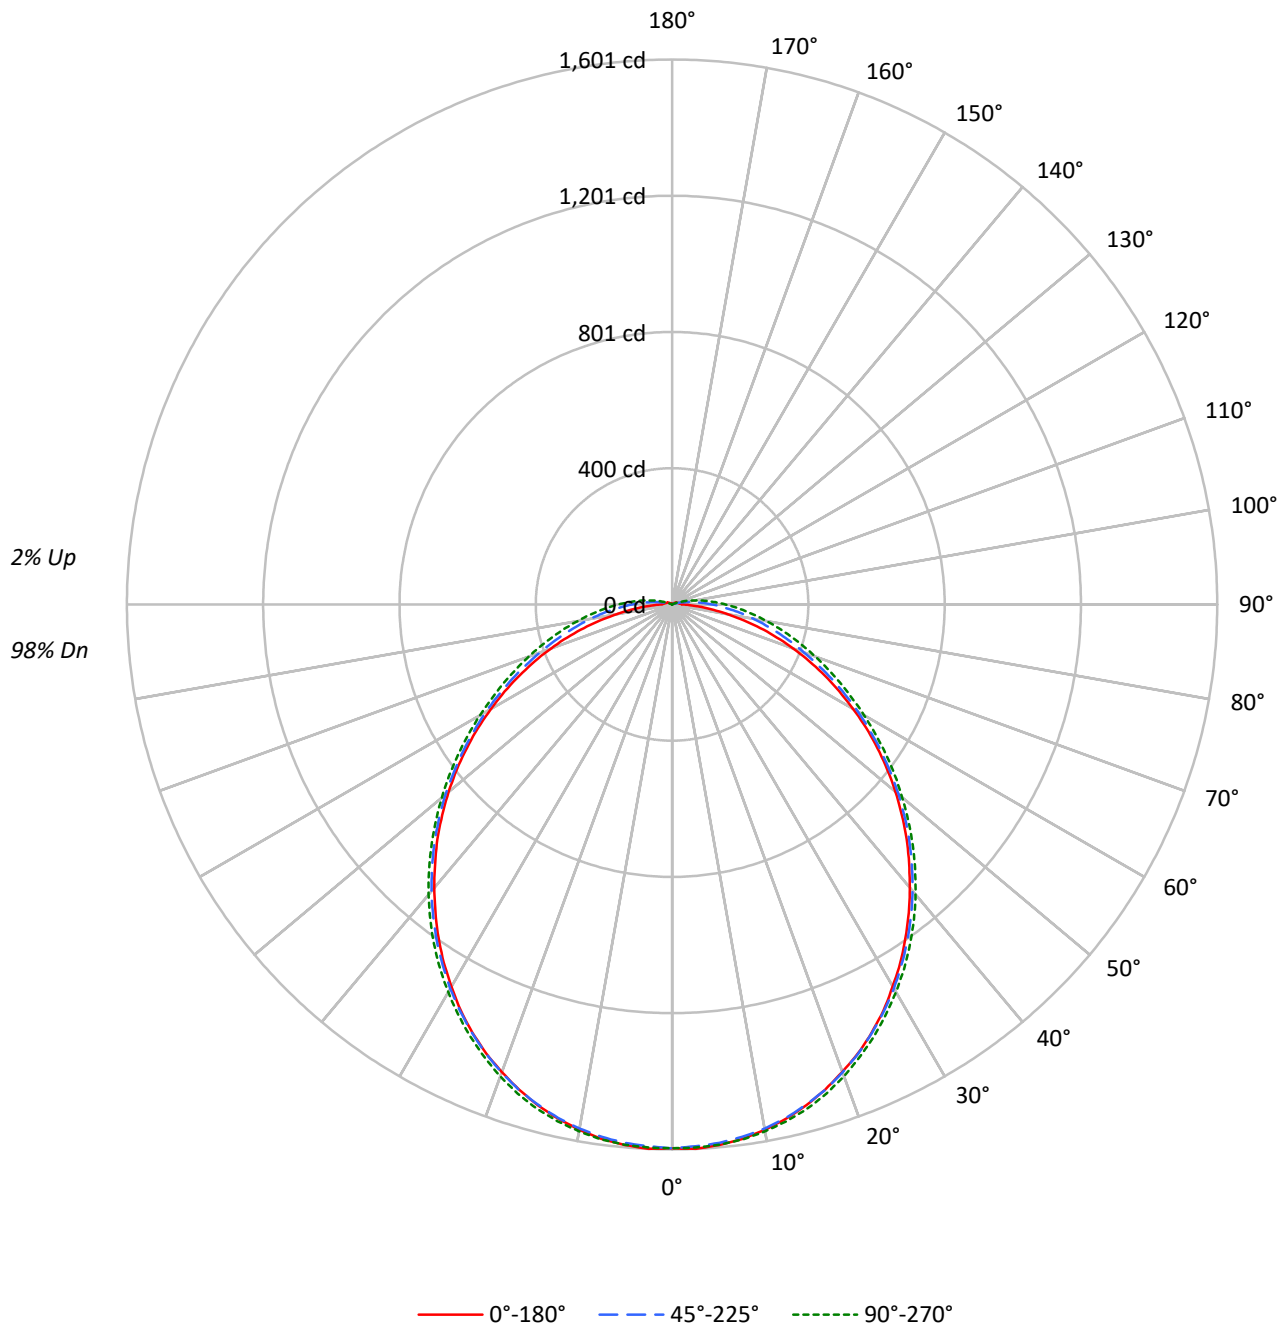

TEST NUMBER: P1217223

CATALOG NUMBER: 14-ID2-50-CNV-L940-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	118	118	118	118	115	115	115	115	110	110	110	105	105	105	100	100	100
1	107	102	98	94	104	100	96	92	95	92	88	91	88	85	87	84	82
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69
3	89	78	70	63	86	76	69	62	73	66	61	70	64	60	67	62	58
4	81	69	60	54	79	68	59	53	65	58	52	62	56	51	60	54	50
5	75	62	53	46	73	61	52	46	58	51	45	56	49	44	54	48	44
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34
8	60	46	38	32	58	45	37	32	44	37	31	42	36	31	41	35	31
9	56	42	34	29	54	42	34	29	40	33	28	39	33	28	38	32	28
10	52	39	31	26	51	39	31	26	37	30	26	36	30	25	35	29	25

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4300	4300	4300
5°	4291	4237	4244
10°	4252	4168	4177
15°	4198	4084	4097
20°	4126	3985	3993
25°	4045	3869	3872
30°	3936	3742	3740
35°	3821	3602	3600
40°	3692	3450	3445
45°	3567	3288	3278
50°	3421	3111	3102
55°	3267	2918	2925
60°	3090	2727	2745
65°	2901	2525	2580
70°	2682	2335	2444
75°	2427	2191	2339
80°	2096	2084	2292
85°	1831	2047	2344

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3567 cd/sqm

TEST NUMBER: P1217223
 CATALOG NUMBER: 14-ID2-50-CNV-L940-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.1	3.3
10°-20°	429.9	9.5
20°-30°	640.6	14.1
30°-40°	753.8	16.6
40°-50°	760.6	16.7
50°-60°	670.6	14.7
60°-70°	513.7	11.3
70°-80°	336.4	7.4
80°-90°	179.9	4.0
90°-100°	76.4	1.7
100°-110°	24.4	0.5
110°-120°	5.7	0.1
120°-130°	2.6	0.1
130°-140°	1.3	0.0
140°-150°	0.5	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1221.6	26.9
0°-40°	1975.4	43.4
0°-60°	3406.6	74.9
0°-90°	4436.5	97.6
90°-120°	106.6	2.3
90°-150°	111.0	2.4
90°-180°	111.0	2.4
0°-180°	4547.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1598	1598	1598	1598	1598	
5°	1594	1592	1588	1589	1593	151
15°	1523	1521	1521	1528	1534	429
25°	1388	1385	1389	1396	1401	639
35°	1196	1196	1205	1215	1219	747
45°	975	976	986	998	999	751
55°	736	736	748	763	766	658
65°	495	497	517	536	544	490
75°	268	279	322	351	359	284
85°	86	118	174	206	215	87
90°	31	67	117	148	157	20
95°	25	34	72	99	109	20
105°	18	14	15	31	37	19
115°	12	9	5	0	0	12
125°	7	5	2	0	0	6
135°	4	3	2	0	0	3
145°	2	2	0	0	0	1
155°	0	0	0	0	0	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0

TEST NUMBER: P1217223

CATALOG NUMBER: 14-ID2-50-CNV-L940-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1597.8	1597.8	1597.8	1597.8	1597.8
2.5°	1600.9	1598.6	1593.2	1594.8	1597.0
5°	1594.0	1591.7	1587.9	1588.6	1593.2
7.5°	1584.0	1581.0	1577.9	1580.2	1585.6
10°	1567.2	1565.7	1563.4	1566.5	1571.8
12.5°	1547.4	1545.8	1545.1	1548.9	1555.0
15°	1522.9	1521.4	1521.4	1527.5	1533.6
17.5°	1494.6	1493.8	1495.4	1502.2	1506.8
20°	1461.7	1461.0	1463.3	1470.1	1475.5
22.5°	1427.3	1425.8	1428.1	1434.2	1439.6
25°	1387.6	1385.3	1389.1	1396.0	1401.3
27.5°	1344.8	1340.9	1347.1	1354.7	1359.3
30°	1295.8	1296.6	1302.7	1310.4	1314.9
32.5°	1247.7	1246.9	1254.5	1263.7	1268.3
35°	1195.7	1195.7	1204.9	1214.8	1218.6
37.5°	1141.4	1143.7	1152.9	1162.0	1166.6
40°	1086.4	1089.4	1098.6	1108.5	1112.4
42.5°	1029.8	1032.8	1042.8	1053.5	1056.5
45°	974.7	975.5	986.2	997.7	999.2
47.5°	915.1	915.9	927.3	938.8	941.1
50°	856.2	857.0	868.5	880.7	882.2
52.5°	796.6	797.4	807.3	821.8	824.9
55°	736.2	736.2	747.7	763.0	766.0
57.5°	675.8	675.8	688.1	704.1	707.9
60°	613.9	615.4	630.7	646.0	651.4
62.5°	554.3	555.8	572.6	588.7	595.5
65°	494.6	496.9	516.8	535.9	544.3
67.5°	436.5	439.6	462.5	487.0	494.6
70°	378.4	384.5	412.1	438.8	447.2
72.5°	322.6	329.5	366.2	394.5	402.1
75°	268.3	279.0	321.9	350.9	359.3
77.5°	215.6	231.6	280.6	311.9	319.6
80°	165.9	189.6	242.3	273.7	282.1
82.5°	123.8	150.6	207.2	239.3	246.9
85°	86.4	118.5	173.5	206.4	214.8
87.5°	55.8	91.0	143.7	175.8	185.0
90°	30.6	67.3	117.0	147.5	156.7
92.5°	27.5	48.9	93.3	122.3	131.5
95°	25.2	34.4	71.9	99.4	108.6
97.5°	22.9	22.9	53.5	78.7	87.2
100°	21.4	16.8	38.2	60.4	68.8
102.5°	19.1	15.3	25.2	44.3	52.0
105°	17.6	13.8	15.3	30.6	36.7
107.5°	16.1	12.2	7.6	19.1	24.5
110°	14.5	11.5	6.1	9.2	14.5

TEST NUMBER: P1217223

CATALOG NUMBER: 14-ID2-50-CNV-L940-U

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	13.0	9.9	5.4	2.3	5.4
115°	11.5	9.2	4.6	0.0	0.0
117.5°	9.9	8.4	3.8	0.0	0.0
120°	9.2	6.9	3.8	0.0	0.0
122.5°	8.4	6.1	3.1	0.0	0.0
125°	6.9	5.4	2.3	0.0	0.0
127.5°	6.1	4.6	2.3	0.0	0.0
130°	5.4	4.6	1.5	0.0	0.0
132.5°	4.6	3.8	1.5	0.0	0.0
135°	3.8	3.1	1.5	0.0	0.0
137.5°	3.8	3.1	0.8	0.0	0.0
140°	3.1	2.3	0.8	0.0	0.0
142.5°	2.3	1.5	0.8	0.0	0.0
145°	2.3	1.5	0.0	0.0	0.0
147.5°	1.5	1.5	0.0	0.0	0.0
150°	1.5	0.8	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1217223

CATALOG NUMBER: 14-ID2-50-CNV-L940-U

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.13	16.72	15.53	17.09	17.47	15.77	17.37	16.18	17.73	18.11
	3H	16.73	18.17	17.15	18.55	18.97	17.75	19.20	18.17	19.57	19.99
	4H	17.30	18.66	17.74	19.06	19.50	18.65	20.01	19.08	20.41	20.84
	6H	17.70	18.96	18.15	19.38	19.83	19.52	20.79	19.97	21.20	21.65
	8H	17.82	19.03	18.28	19.47	19.93	19.94	21.16	20.40	21.59	22.05
	12H	17.90	19.06	18.37	19.49	19.98	20.38	21.55	20.85	21.98	22.46
4H	2H	15.77	17.14	16.21	17.54	17.97	16.29	17.65	16.72	18.05	18.48
	3H	17.59	18.75	18.04	19.19	19.65	18.49	19.65	18.94	20.09	20.55
	4H	18.28	19.34	18.75	19.79	20.29	19.55	20.60	20.02	21.06	21.55
	6H	18.81	19.73	19.30	20.22	20.73	20.60	21.53	21.09	22.01	22.52
	8H	18.98	19.85	19.47	20.33	20.85	21.11	21.98	21.61	22.47	22.99
	12H	19.11	19.89	19.62	20.41	20.93	21.66	22.45	22.18	22.96	23.49
8H	4H	18.71	19.58	19.21	20.07	20.59	19.82	20.69	20.32	21.18	21.70
	6H	19.38	20.11	19.91	20.64	21.17	21.04	21.77	21.57	22.30	22.83
	8H	19.64	20.30	20.18	20.84	21.38	21.69	22.35	22.23	22.89	23.43
	12H	19.85	20.43	20.39	20.96	21.58	22.40	22.99	22.94	23.52	24.13
12H	4H	18.80	19.59	19.32	20.11	20.63	19.84	20.63	20.36	21.15	21.67
	6H	19.54	20.20	20.08	20.74	21.28	21.10	21.76	21.64	22.31	22.85
	8H	19.87	20.46	20.41	20.99	21.60	21.82	22.41	22.36	22.94	23.55

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Corelite

Report Number: SP1-2506-458-11

Test Date: 08/26/2025

Luminaire Tested: 22ID2-55-CFR1-L940-U

Data in this report applies to families of products including 22ID2-55-CFR1-L940-U


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2506-458-11
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/27/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Corelite
 Catalog Number: **22ID2-55-CFR1-L940-U**
 Description: 2X2 CGTX WITH INDEPTH FRAME AND CFR1 LENS - 5500 LUMEN 4000K 90CRI

Spectral Parameters

CCT (K): 3910
 CIE u' : 0.2263
 CIE v' : 0.5043
 Duv: 0.0008
 CIE x: 0.3851
 CIE y: 0.3813
 CIE z: 0.2336
 Peak Wavelength (nm): 451
 Dominant Wavelength (nm): 578
 Purity: 30.01895
 R_f: 90.8
 R_g: 98.8

CRI (Ra): 92.4
 R1: 92.5
 R2: 94.9
 R3: 95.8
 R4: 92.7
 R5: 91.7
 R6: 92.1
 R7: 94.3
 R8: 85.2
 R9: 62.0
 R10: 87.0
 R11: 92.8
 R12: 71.7
 R13: 93.2
 R14: 97.3
 R15: 89.6

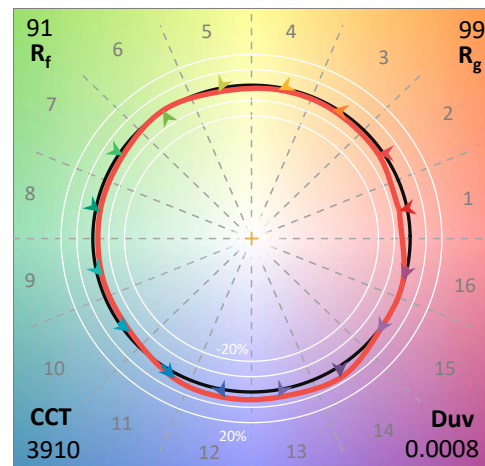

Test Conditions


Stabilization Time: 31M
 Operation Time: 1H 31M
 Sphere Temperature (°C): 25.2.

REPORT NUMBER: SP1-2506-458-11


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2506-458-11

CIE 1931 Chromaticity Diagram

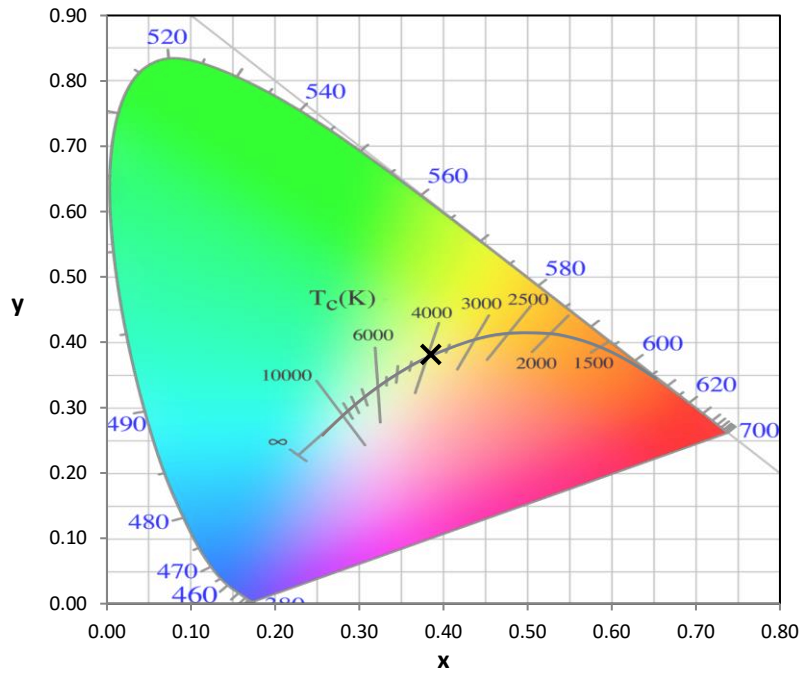


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

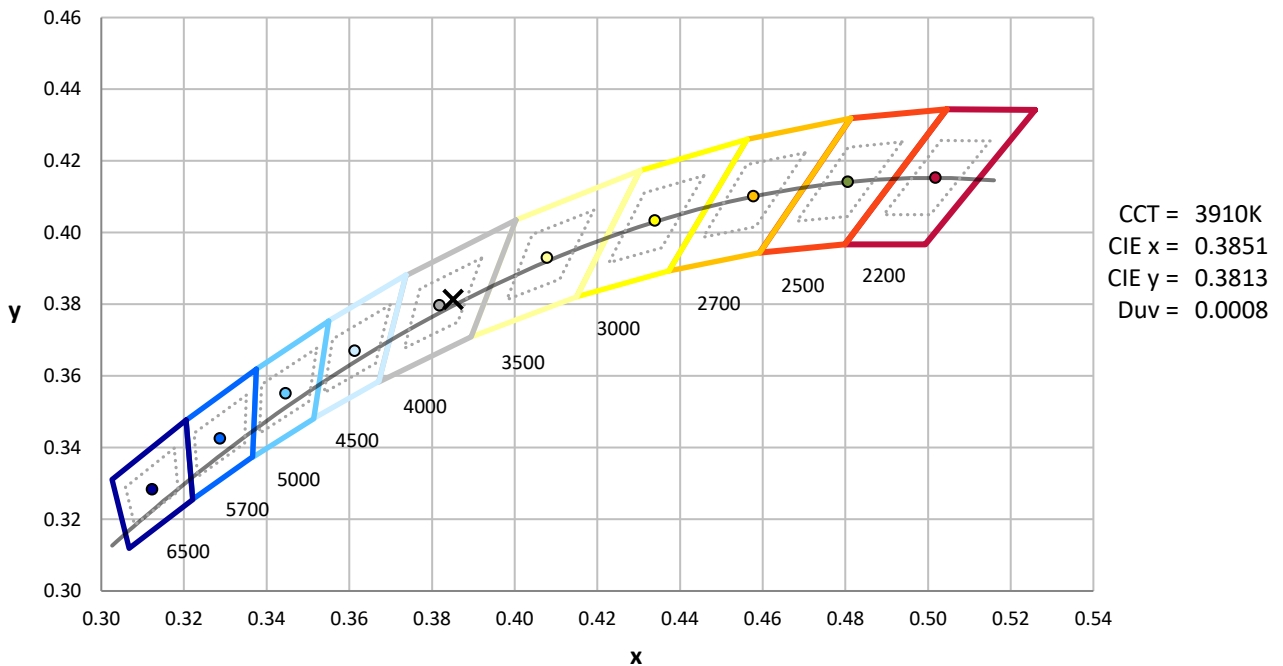

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2506-458-11

Photopic Flux vs. Wavelength

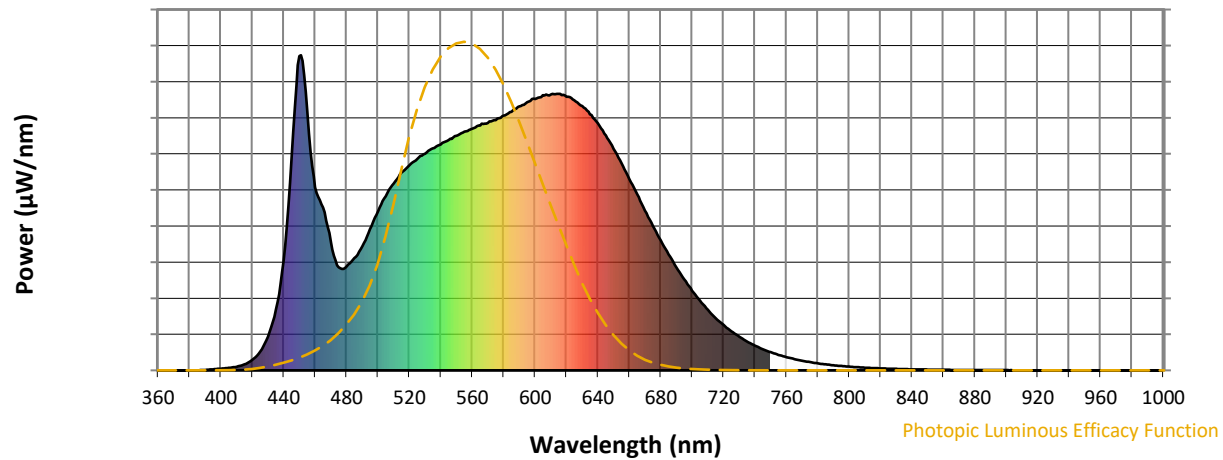


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	394	NR	620	868	NR	750	58	NR	880	1	NR
365	0	NR	495	449	NR	625	858	NR	755	49	NR	885	1	NR
370	0	NR	500	505	NR	630	839	NR	760	42	NR	890	1	NR
375	0	NR	505	553	NR	635	813	NR	765	36	NR	895	1	NR
380	0	NR	510	593	NR	640	783	NR	770	31	NR	900	1	NR
385	0	NR	515	628	NR	645	746	NR	775	26	NR	905	1	NR
390	1	NR	520	651	NR	650	702	NR	780	22	NR	910	0	NR
395	4	NR	525	670	NR	655	657	NR	785	19	NR	915	0	NR
400	5	NR	530	687	NR	660	607	NR	790	16	NR	920	0	NR
405	8	NR	535	705	NR	665	559	NR	795	14	NR	925	0	NR
410	12	NR	540	717	NR	670	507	NR	800	12	NR	930	0	NR
415	19	NR	545	731	NR	675	458	NR	805	10	NR	935	0	NR
420	34	NR	550	745	NR	680	413	NR	810	9	NR	940	0	NR
425	60	NR	555	757	NR	685	367	NR	815	7	NR	945	0	NR
430	107	NR	560	767	NR	690	328	NR	820	6	NR	950	0	NR
435	194	NR	565	777	NR	695	289	NR	825	5	NR	955	0	NR
440	349	NR	570	785	NR	700	253	NR	830	5	NR	960	0	NR
445	678	NR	575	794	NR	705	221	NR	835	4	NR	965	0	NR
450	997	NR	580	809	NR	710	192	NR	840	3	NR	970	0	NR
455	819	NR	585	820	NR	715	165	NR	845	3	NR	975	0	NR
460	581	NR	590	838	NR	720	144	NR	850	2	NR	980	0	NR
465	517	NR	595	851	NR	725	124	NR	855	2	NR	985	0	NR
470	406	NR	600	861	NR	730	107	NR	860	2	NR	990	0	NR
475	327	NR	605	873	NR	735	91	NR	865	2	NR	995	0	NR
480	330	NR	610	875	NR	740	78	NR	870	1	NR	1000	0	NR
485	356	NR	615	877	NR	745	67	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-11

Scotopic Flux vs. Wavelength

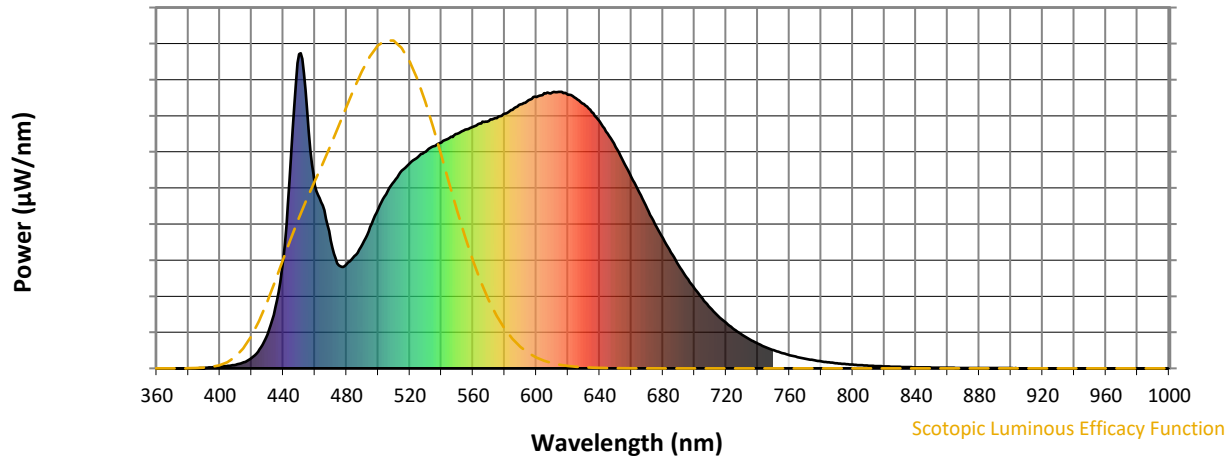


Scotopic Lumens: NR

S/P: 1.75

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	394	NR	620	868	NR	750	58	NR	880	1	NR
365	0	NR	495	449	NR	625	858	NR	755	49	NR	885	1	NR
370	0	NR	500	505	NR	630	839	NR	760	42	NR	890	1	NR
375	0	NR	505	553	NR	635	813	NR	765	36	NR	895	1	NR
380	0	NR	510	593	NR	640	783	NR	770	31	NR	900	1	NR
385	0	NR	515	628	NR	645	746	NR	775	26	NR	905	1	NR
390	1	NR	520	651	NR	650	702	NR	780	22	NR	910	0	NR
395	4	NR	525	670	NR	655	657	NR	785	19	NR	915	0	NR
400	5	NR	530	687	NR	660	607	NR	790	16	NR	920	0	NR
405	8	NR	535	705	NR	665	559	NR	795	14	NR	925	0	NR
410	12	NR	540	717	NR	670	507	NR	800	12	NR	930	0	NR
415	19	NR	545	731	NR	675	458	NR	805	10	NR	935	0	NR
420	34	NR	550	745	NR	680	413	NR	810	9	NR	940	0	NR
425	60	NR	555	757	NR	685	367	NR	815	7	NR	945	0	NR
430	107	NR	560	767	NR	690	328	NR	820	6	NR	950	0	NR
435	194	NR	565	777	NR	695	289	NR	825	5	NR	955	0	NR
440	349	NR	570	785	NR	700	253	NR	830	5	NR	960	0	NR
445	678	NR	575	794	NR	705	221	NR	835	4	NR	965	0	NR
450	997	NR	580	809	NR	710	192	NR	840	3	NR	970	0	NR
455	819	NR	585	820	NR	715	165	NR	845	3	NR	975	0	NR
460	581	NR	590	838	NR	720	144	NR	850	2	NR	980	0	NR
465	517	NR	595	851	NR	725	124	NR	855	2	NR	985	0	NR
470	406	NR	600	861	NR	730	107	NR	860	2	NR	990	0	NR
475	327	NR	605	873	NR	735	91	NR	865	2	NR	995	0	NR
480	330	NR	610	875	NR	740	78	NR	870	1	NR	1000	0	NR
485	356	NR	615	877	NR	745	67	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-11

Melanopic Flux vs. Wavelength

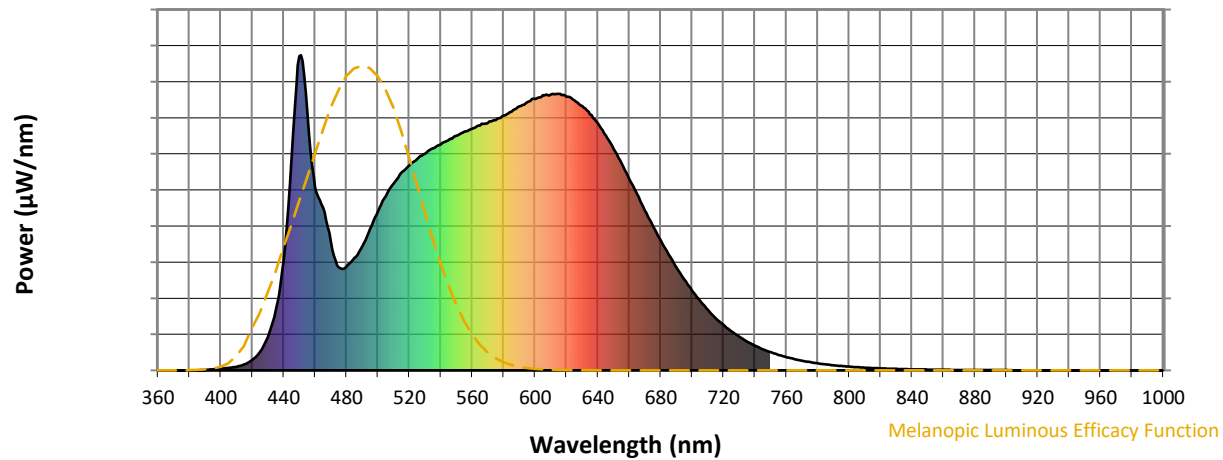

Melanopic Lumens: NR

M/P: 3.61


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	394	NR	620	868	NR	750	58	NR	880	1	NR
365	0	NR	495	449	NR	625	858	NR	755	49	NR	885	1	NR
370	0	NR	500	505	NR	630	839	NR	760	42	NR	890	1	NR
375	0	NR	505	553	NR	635	813	NR	765	36	NR	895	1	NR
380	0	NR	510	593	NR	640	783	NR	770	31	NR	900	1	NR
385	0	NR	515	628	NR	645	746	NR	775	26	NR	905	1	NR
390	1	NR	520	651	NR	650	702	NR	780	22	NR	910	0	NR
395	4	NR	525	670	NR	655	657	NR	785	19	NR	915	0	NR
400	5	NR	530	687	NR	660	607	NR	790	16	NR	920	0	NR
405	8	NR	535	705	NR	665	559	NR	795	14	NR	925	0	NR
410	12	NR	540	717	NR	670	507	NR	800	12	NR	930	0	NR
415	19	NR	545	731	NR	675	458	NR	805	10	NR	935	0	NR
420	34	NR	550	745	NR	680	413	NR	810	9	NR	940	0	NR
425	60	NR	555	757	NR	685	367	NR	815	7	NR	945	0	NR
430	107	NR	560	767	NR	690	328	NR	820	6	NR	950	0	NR
435	194	NR	565	777	NR	695	289	NR	825	5	NR	955	0	NR
440	349	NR	570	785	NR	700	253	NR	830	5	NR	960	0	NR
445	678	NR	575	794	NR	705	221	NR	835	4	NR	965	0	NR
450	997	NR	580	809	NR	710	192	NR	840	3	NR	970	0	NR
455	819	NR	585	820	NR	715	165	NR	845	3	NR	975	0	NR
460	581	NR	590	838	NR	720	144	NR	850	2	NR	980	0	NR
465	517	NR	595	851	NR	725	124	NR	855	2	NR	985	0	NR
470	406	NR	600	861	NR	730	107	NR	860	2	NR	990	0	NR
475	327	NR	605	873	NR	735	91	NR	865	2	NR	995	0	NR
480	330	NR	610	875	NR	740	78	NR	870	1	NR	1000	0	NR
485	356	NR	615	877	NR	745	67	NR	875	1	NR			

REPORT NUMBER: SP1-2506-458-11





TM-30-18

Summary

$R_f = 90.8$
 $R_g = 98.8$
 $CIE R_a = 92.4$
 $R_9 = 62.0$

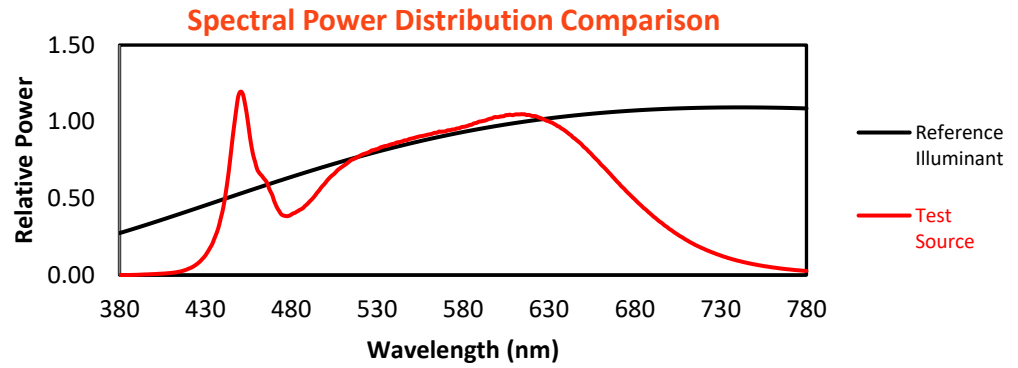


Color Vector Graphics

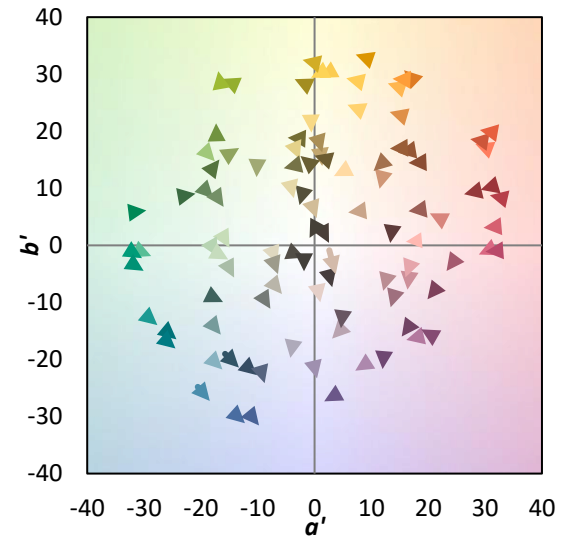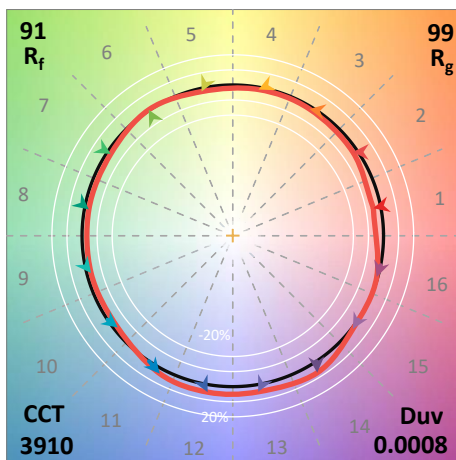
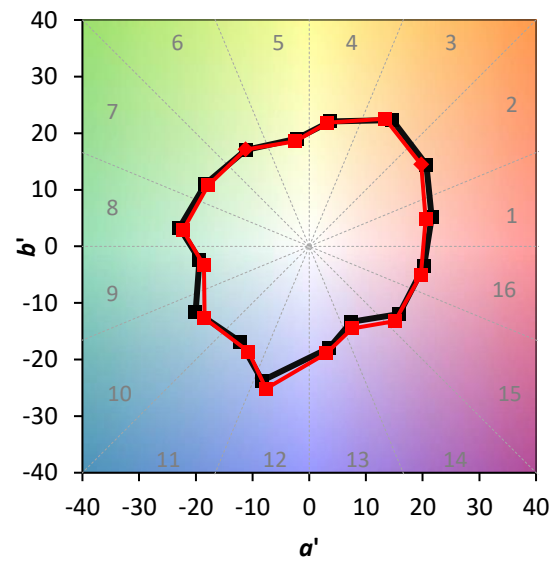
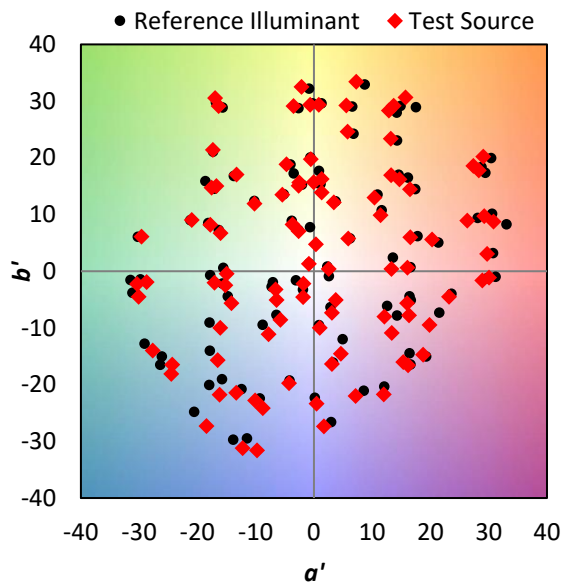


Individual Sample Fidelity Index ($R_{f,i}$)


CES01 = 86	CES26 = 93	CES51 = 96	CES76 = 85
CES02 = 62	CES27 = 90	CES52 = 98	CES77 = 88
CES03 = 31	CES28 = 96	CES53 = 96	CES78 = 82
CES04 = 69	CES29 = 96	CES54 = 92	CES79 = 96
CES05 = 49	CES30 = 90	CES55 = 90	CES80 = 93
CES06 = 50	CES31 = 97	CES56 = 93	CES81 = 89
CES07 = 42	CES32 = 91	CES57 = 91	CES82 = 97
CES08 = 41	CES33 = 98	CES58 = 92	CES83 = 98
CES09 = 29	CES34 = 93	CES59 = 96	CES84 = 93
CES10 = 74	CES35 = 96	CES60 = 91	CES85 = 83
CES11 = 57	CES36 = 79	CES61 = 91	CES86 = 88
CES12 = 63	CES37 = 95	CES62 = 84	CES87 = 91
CES13 = 43	CES38 = 85	CES63 = 91	CES88 = 96
CES14 = 74	CES39 = 99	CES64 = 87	CES89 = 87
CES15 = 71	CES40 = 98	CES65 = 87	CES90 = 96
CES16 = 47	CES41 = 96	CES66 = 84	CES91 = 71
CES17 = 49	CES42 = 95	CES67 = 83	CES92 = 79
CES18 = 56	CES43 = 95	CES68 = 86	CES93 = 87
CES19 = 71	CES44 = 99	CES69 = 87	CES94 = 81
CES20 = 66	CES45 = 98	CES70 = 84	CES95 = 82
CES21 = 85	CES46 = 97	CES71 = 77	CES96 = 91
CES22 = 78	CES47 = 97	CES72 = 93	CES97 = 96
CES23 = 91	CES48 = 90	CES73 = 78	CES98 = 94
CES24 = 90	CES49 = 96	CES74 = 91	CES99 = 91
CES25 = 71	CES50 = 97	CES75 = 80	

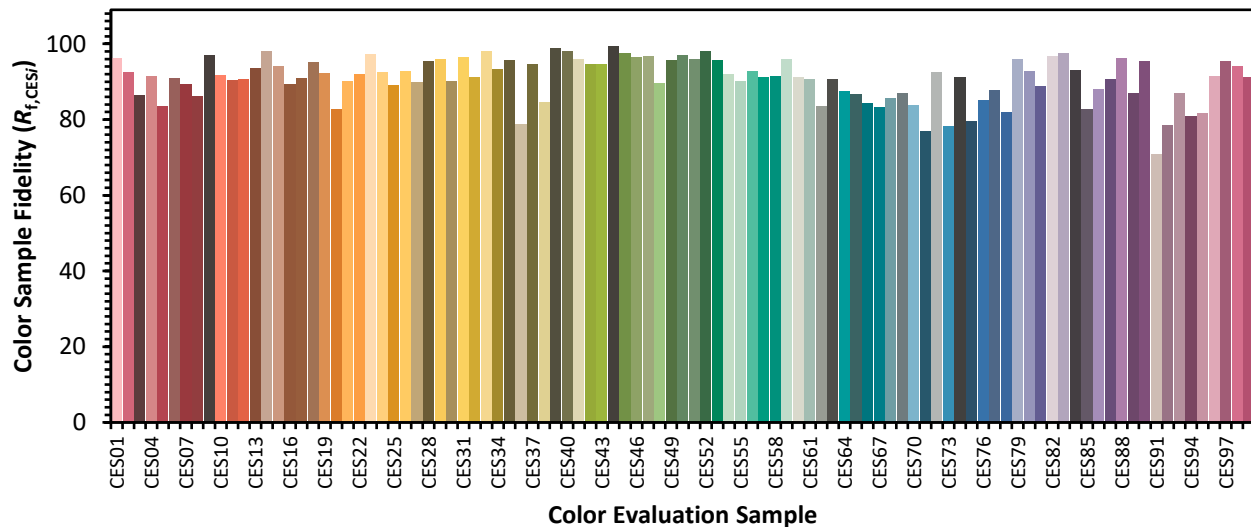

Color Rendition by Hue-Angle Bin

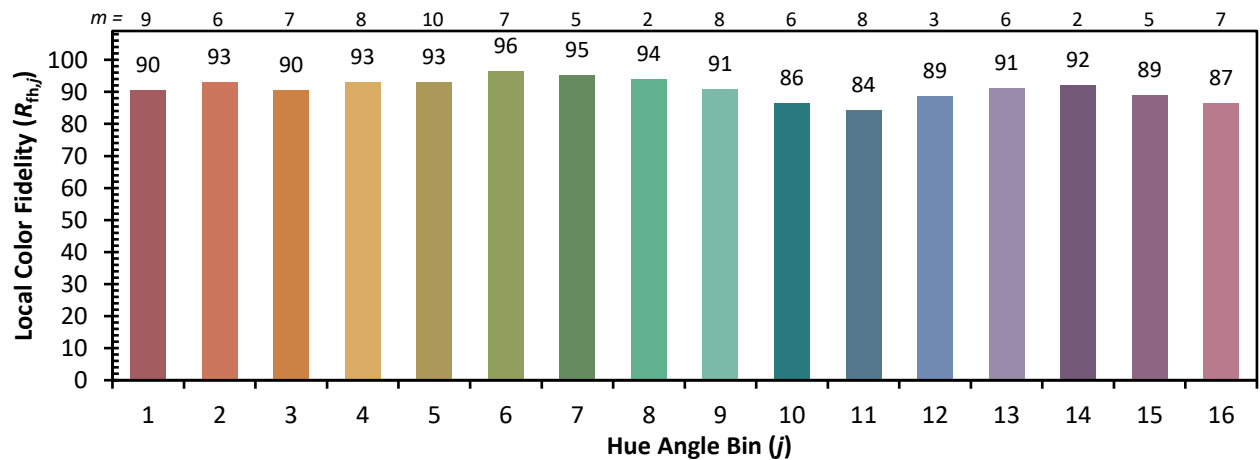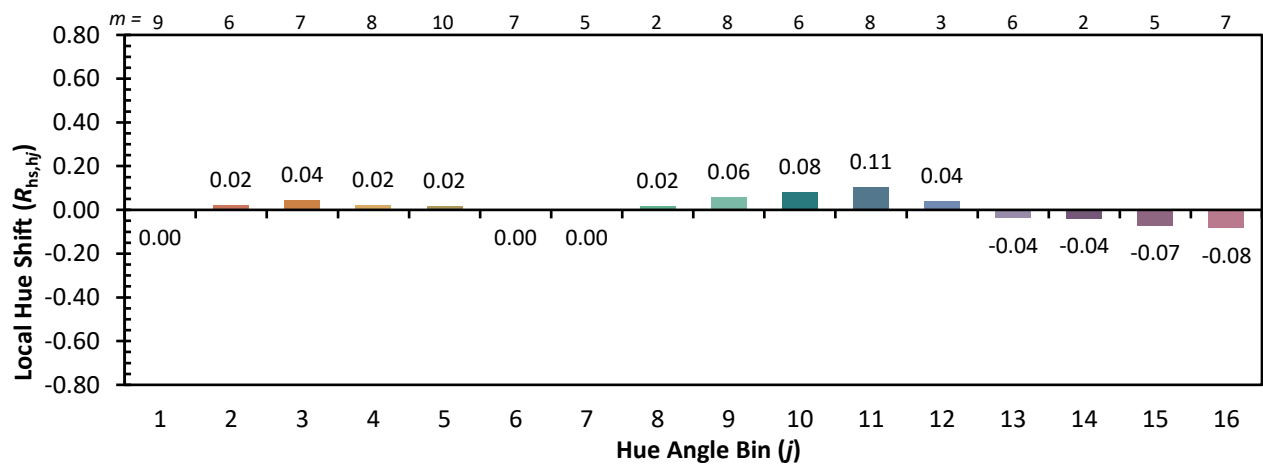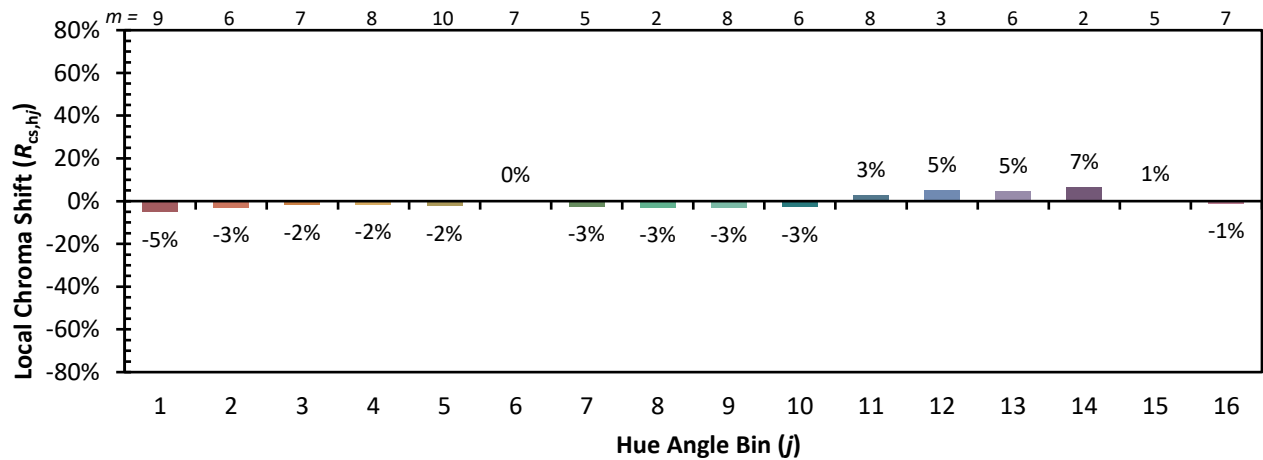

Measure Comparisons

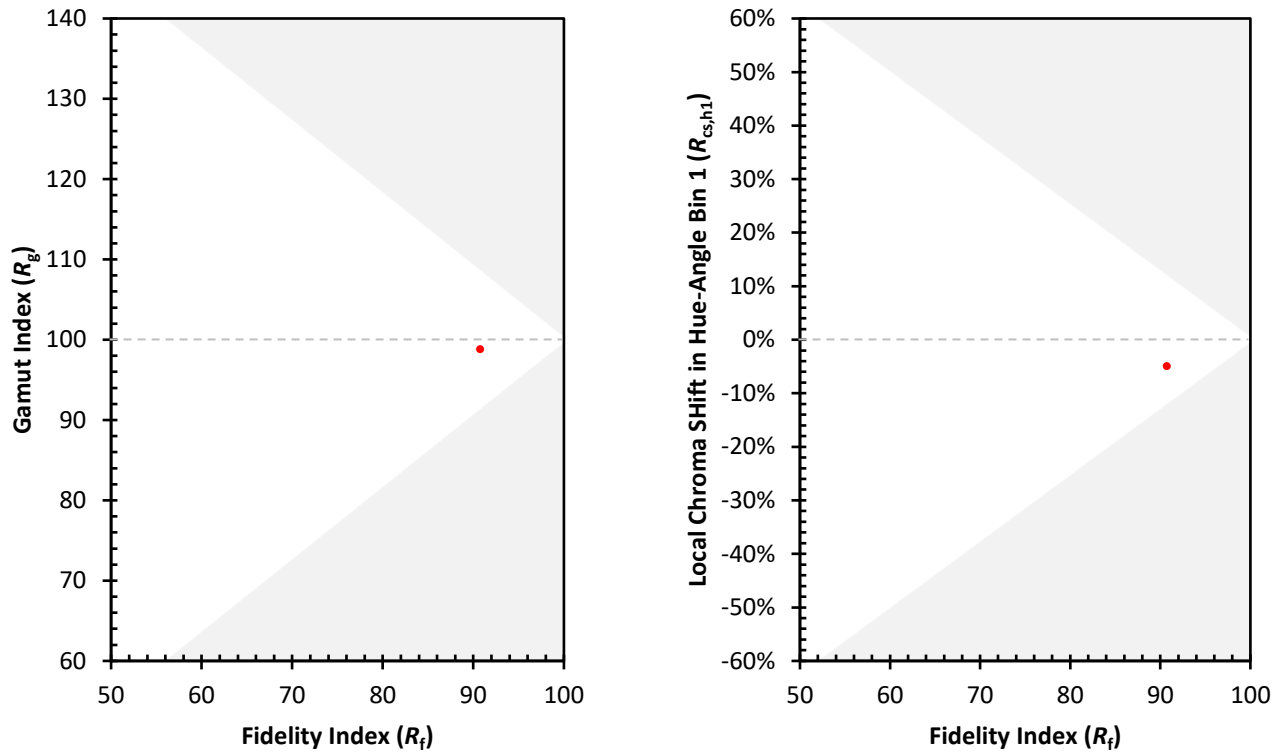

(END OF REPORT)