

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P412375

Luminaire Tested: **22PD-30-PB1-L927**

Issue Date: 9/15/2020



Test Information

Test Method: LM-79-08
Report Number: P412375
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-14)
Test Lab: INNOVATION CENTER
Issue Date: 9/15/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: 22PD-30-PB1-L927
Description: 3000 LUMEN 2X2 PERCEIVE LED TROFFER WITH BEVEL PATTERN OPTICS AND 90 CRI, 2700 CCT LEDS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2304.0 lumens
Efficiency: N/A
Efficacy: 93.7 lumens/watt
Spacing Criteria (0/90/45): 1.33 / 1.32 / 1.4
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct

Input Watts (W): 24.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P412375

CATALOG NUMBER: 22PD-30-PB1-L927

Luminous Intensity Polar Plot

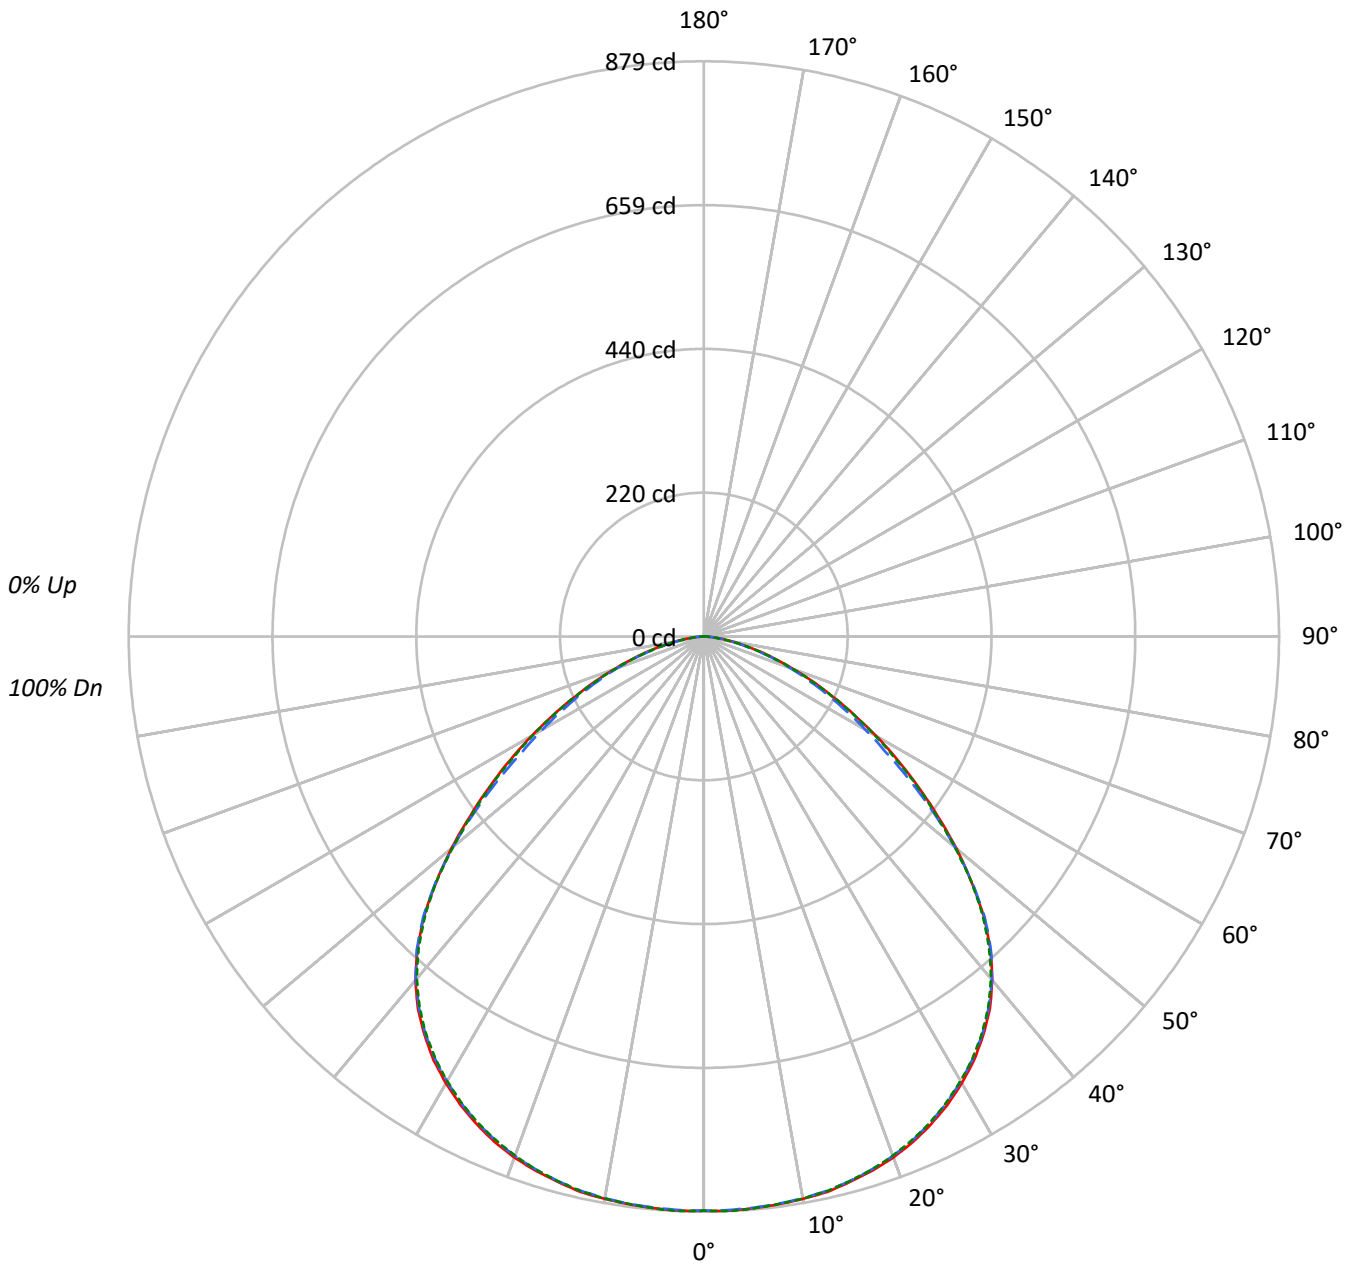



TEST NUMBER: P412375

CATALOG NUMBER: 22PD-30-PB1-L927

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86																			
2	101	93	87	82	98	91	86	81	88	83	79	85	81	77	82	78	76	73																			
3	92	83	75	69	90	81	74	68	78	72	67	76	70	66	73	69	65	63																			
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54																			
5	78	66	58	51	76	65	57	51	63	56	50	61	55	50	59	54	49	47																			
6	72	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42																			
7	67	54	46	40	66	53	45	40	52	45	39	51	44	39	49	43	39	37																			
8	63	50	41	36	61	49	41	36	48	40	35	46	40	35	45	39	35	33																			
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30																			
10	55	42	34	29	54	41	34	29	41	34	29	40	33	29	39	33	29	27																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2362	2362	2362
5°	2369	2367	2370
10°	2385	2382	2383
15°	2404	2400	2400
20°	2426	2419	2418
25°	2441	2434	2432
30°	2449	2440	2438
35°	2444	2437	2433
40°	2408	2405	2398
45°	2302	2309	2292
50°	2107	2096	2094
55°	1873	1807	1860
60°	1633	1533	1623
65°	1384	1310	1377
70°	1145	1098	1134
75°	925	866	889
80°	668	648	643
85°	435	435	420



TEST NUMBER: P412375

CATALOG NUMBER: 22PD-30-PB1-L927

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.5	3.6
10°-20°	243.5	10.6
20°-30°	377.9	16.4
30°-40°	463.4	20.1
40°-50°	463.2	20.1
50°-60°	350.9	15.2
60°-70°	210.4	9.1
70°-80°	92.7	4.0
80°-90°	18.4	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	704.9	30.6
0°-40°	1168.4	50.7
0°-60°	1982.5	86.0
0°-90°	2304.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2304.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	878	878	878	878	878	
5°	877	876	876	876	877	84
15°	863	862	862	861	862	244
25°	822	821	820	818	819	379
35°	744	744	742	741	741	465
45°	605	606	607	605	602	463
55°	399	390	385	390	396	358
65°	217	210	206	209	216	217
75°	89	87	83	85	86	95
85°	14	15	14	14	14	19
90°	0	0	0	0	0	



TEST NUMBER: P412375

CATALOG NUMBER: 22PD-30-PB1-L927

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	877.6	877.6	877.6	877.6	877.6
2.5°	878.4	877.0	877.3	877.3	878.9
5°	877.0	876.0	876.2	876.0	877.3
7.5°	875.1	874.1	874.3	874.1	874.9
10°	872.7	871.6	871.6	871.1	872.2
12.5°	869.5	868.1	867.6	867.3	868.1
15°	862.9	862.1	861.6	861.0	861.6
17.5°	855.9	854.5	854.0	852.9	854.0
20°	847.2	845.3	844.8	843.9	844.2
22.5°	835.8	834.2	833.4	832.0	832.5
25°	822.2	820.6	819.8	818.4	819.0
27.5°	806.5	805.4	803.5	802.4	802.7
30°	788.3	787.2	785.1	784.5	784.5
32.5°	768.2	766.9	765.0	764.4	764.2
35°	744.1	743.8	741.9	741.4	740.6
37.5°	717.8	717.2	715.0	714.5	713.7
40°	685.5	684.9	684.7	683.6	682.5
42.5°	648.0	648.8	649.4	647.2	645.0
45°	604.9	605.7	606.8	605.1	602.2
47.5°	554.4	557.7	556.0	557.1	554.1
50°	503.4	503.4	500.7	501.8	500.1
52.5°	449.9	445.6	442.3	444.5	446.7
55°	399.2	390.5	385.1	390.2	396.5
57.5°	350.6	340.3	330.3	338.4	346.0
60°	303.4	291.4	284.9	290.9	301.5
62.5°	258.6	249.9	243.4	248.0	257.0
65°	217.4	209.8	205.7	209.2	216.3
67.5°	179.6	174.5	170.4	173.4	178.8
70°	145.5	144.1	139.5	140.8	144.1
72.5°	114.2	114.0	109.9	111.0	112.9
75°	89.0	87.1	83.3	84.7	85.5
77.5°	63.0	63.8	60.2	61.1	61.1
80°	43.1	44.5	41.8	41.2	41.5
82.5°	27.4	27.4	27.1	26.9	26.1
85°	14.1	14.7	14.1	13.6	13.6
87.5°	5.4	5.4	5.4	5.2	4.9
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)