

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P413077

Luminaire Tested: **22PD-40-PC3-L927**

Issue Date: 9/15/2020



Test Information

Test Method: LM-79-08
Report Number: P413077
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-15)
Test Lab: INNOVATION CENTER
Issue Date: 9/15/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: 22PD-40-PC3-L927
Description: 4000 LUMEN 2X2 PERCEIVE LED TROFFER WITH PYRAMID PATTERN OPTICS AND 90 CRI, 2700 CCT LEDS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3038.0 lumens
Efficiency: N/A
Efficacy: 93.2 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct

Input Watts (W): 32.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P413077

CATALOG NUMBER: 22PD-40-PC3-L927

Luminous Intensity Polar Plot

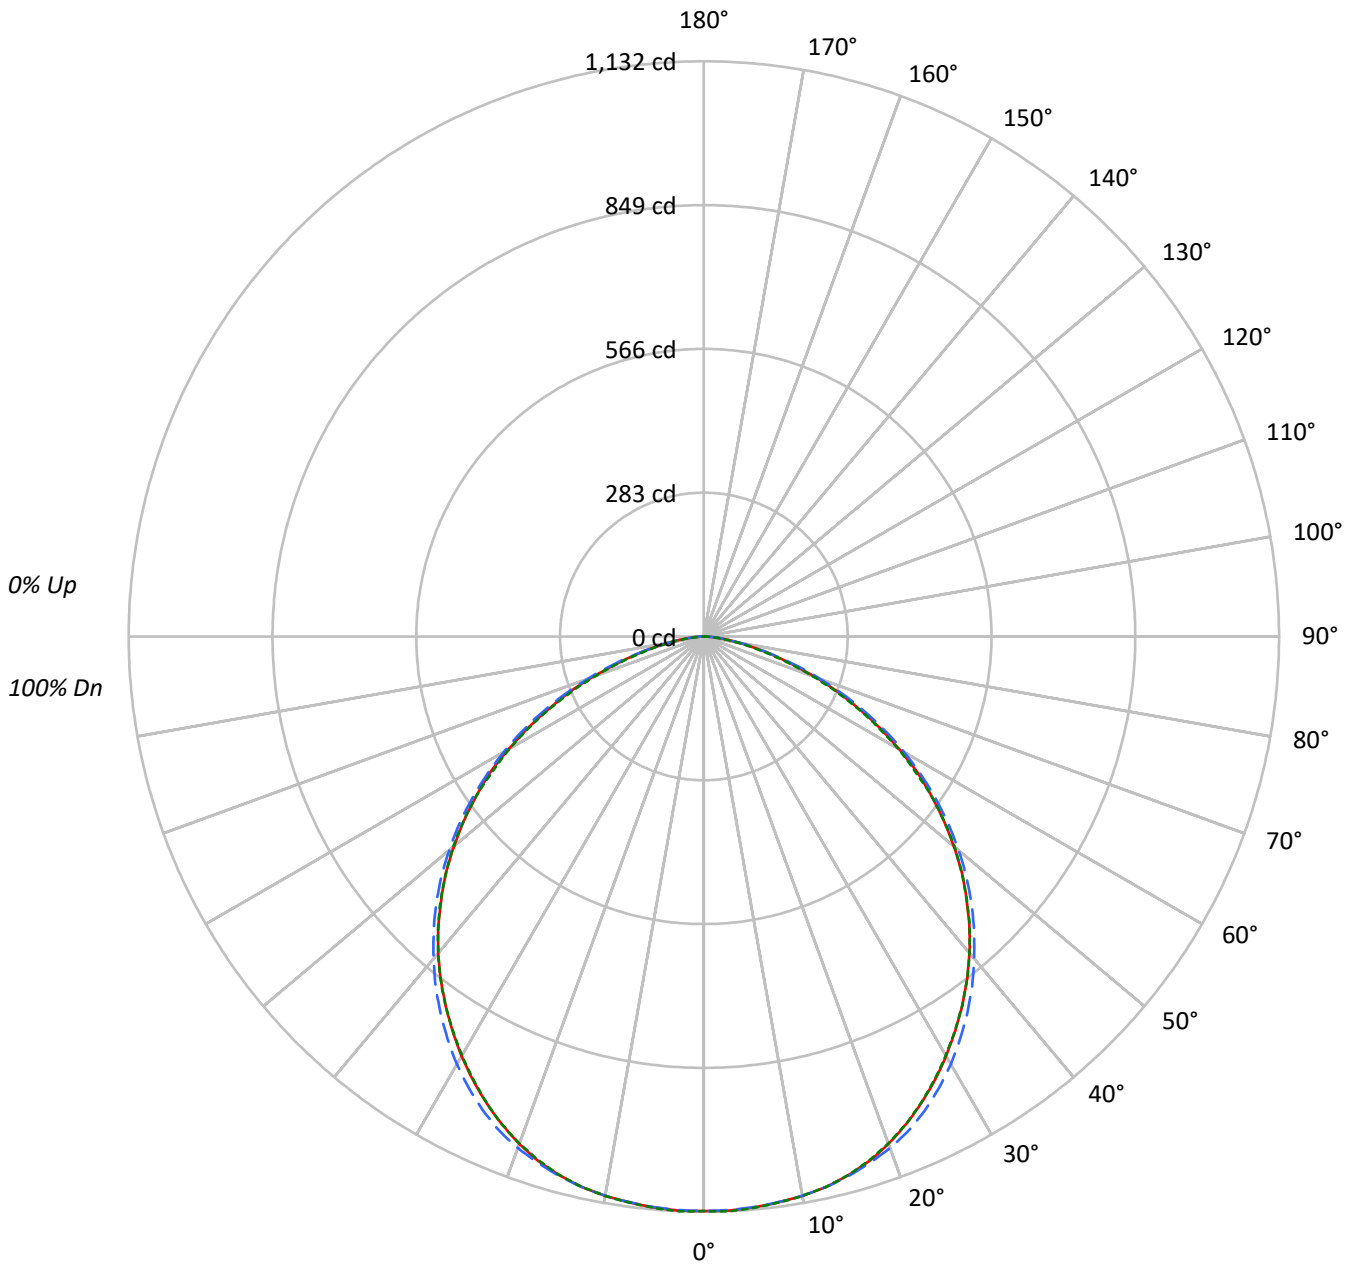



TEST NUMBER: P413077

CATALOG NUMBER: 22PD-40-PC3-L927

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85																			
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72																			
3	91	81	73	67	89	80	72	67	77	70	65	74	69	64	71	67	63	61																			
4	84	72	64	57	82	71	63	57	68	61	56	66	60	55	64	59	54	52																			
5	77	65	56	49	75	63	55	49	61	54	49	59	53	48	58	52	47	45																			
6	71	58	49	43	69	57	49	43	55	48	43	54	47	42	52	46	42	40																			
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35																			
8	62	48	40	34	60	48	40	34	46	39	34	45	38	34	44	38	33	31																			
9	58	44	36	31	56	44	36	31	43	35	30	41	35	30	40	34	30	28																			
10	54	41	33	28	53	40	33	28	39	32	28	38	32	28	38	32	27	26																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3043	3043	3043
5°	3047	3045	3049
10°	3055	3054	3055
15°	3058	3062	3057
20°	3043	3068	3041
25°	3007	3056	3005
30°	2963	3021	2958
35°	2912	2969	2912
40°	2857	2907	2857
45°	2782	2836	2786
50°	2686	2739	2697
55°	2562	2612	2562
60°	2389	2449	2373
65°	2144	2219	2117
70°	1834	1899	1780
75°	1455	1496	1380
80°	1043	1082	992
85°	689	710	645



TEST NUMBER: P413077

CATALOG NUMBER: 22PD-40-PC3-L927

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.3	3.5
10°-20°	309.9	10.2
20°-30°	470.2	15.5
30°-40°	561.5	18.5
40°-50°	571.1	18.8
50°-60°	494.0	16.3
60°-70°	339.9	11.2
70°-80°	154.3	5.1
80°-90°	29.9	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	887.4	29.2
0°-40°	1448.9	47.7
0°-60°	2514.0	82.8
0°-90°	3038.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3038.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1131	1131	1131	1131	1131	
5°	1128	1127	1127	1127	1129	107
15°	1098	1098	1099	1097	1097	310
25°	1013	1022	1029	1020	1012	467
35°	886	902	904	901	886	554
45°	731	744	745	745	732	564
55°	546	555	557	556	546	488
65°	337	346	348	346	332	334
75°	140	145	144	142	133	150
85°	22	24	23	22	21	29
90°	0	0	0	0	0	



TEST NUMBER: P413077

CATALOG NUMBER: 22PD-40-PC3-L927

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1130.9	1130.9	1130.9	1130.9	<i>1130.9</i>
2.5°	<i>1130.9</i>	<i>1129.4</i>	<i>1129.8</i>	<i>1130.1</i>	<i>1132.3</i>
5°	1128.0	1126.9	1127.3	1127.3	<i>1128.7</i>
7.5°	1123.3	1122.9	1122.9	1122.6	<i>1123.7</i>
10°	1117.9	1117.2	1117.6	1117.2	<i>1117.9</i>
12.5°	1109.6	1109.6	1110.0	1108.9	<i>1109.6</i>
15°	1097.8	1098.5	1099.2	1097.4	<i>1097.4</i>
17.5°	1082.7	1084.5	1086.3	1083.0	<i>1081.2</i>
20°	1062.5	1066.8	1071.2	1066.1	<i>1061.8</i>
22.5°	1039.1	1046.3	1052.8	1044.9	<i>1039.1</i>
25°	1012.9	1021.9	1029.4	1020.1	<i>1012.2</i>
27.5°	984.5	994.5	1001.7	993.8	<i>983.0</i>
30°	953.5	965.8	972.2	964.7	<i>952.1</i>
32.5°	920.4	934.8	938.8	934.1	<i>919.7</i>
35°	886.3	902.1	903.9	900.7	<i>886.3</i>
37.5°	850.7	865.8	867.2	865.4	<i>850.7</i>
40°	813.3	827.3	827.6	827.6	<i>813.3</i>
42.5°	773.3	787.0	787.0	786.6	<i>774.4</i>
45°	730.9	744.2	745.3	744.6	<i>732.0</i>
47.5°	688.8	698.9	700.7	699.2	<i>688.1</i>
50°	641.7	652.1	654.3	652.8	<i>644.2</i>
52.5°	594.9	604.6	606.8	605.7	<i>596.0</i>
55°	546.0	555.4	556.8	555.7	<i>546.0</i>
57.5°	498.9	505.0	506.4	504.3	<i>492.1</i>
60°	443.9	452.5	455.0	452.5	<i>441.0</i>
62.5°	390.6	400.0	402.1	398.5	<i>386.3</i>
65°	336.7	346.0	348.5	345.7	<i>332.4</i>
67.5°	285.6	292.4	294.6	291.3	<i>279.1</i>
70°	233.1	241.7	241.4	237.0	<i>226.2</i>
72.5°	181.3	193.2	191.0	188.5	<i>176.6</i>
75°	139.9	145.3	143.9	142.4	<i>132.7</i>
77.5°	100.0	106.5	102.9	103.2	<i>95.0</i>
80°	67.3	73.4	69.8	68.3	<i>64.0</i>
82.5°	42.8	45.3	44.6	43.9	<i>39.9</i>
85°	22.3	23.7	23.0	22.3	<i>20.9</i>
87.5°	8.6	9.4	8.6	8.6	<i>7.9</i>
90°	0.0	0.0	0.0	0.0	<i>0.0</i>



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)