

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P412736

Luminaire Tested: **22PD-40-PP3-L930**

Issue Date: 9/15/2020



**Test Information**

Test Method: LM-79-08  
Report Number: P412736  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 9/15/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: 22PD-40-PP3-L930  
Description: 4000 LUMEN 2X2 PERCEIVE LED TROFFER WITH PRISM PATTERN OPTICS AND 90 CRI, 3000 CCT LEDS  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3353.0 lumens  
Efficiency: N/A  
Efficacy: 102.9 lumens/watt  
Spacing Criteria (0/90/45): 1.33 / 1.33 / 1.43  
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 32.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P412736

CATALOG NUMBER: 22PD-40-PP3-L930

### Luminous Intensity Polar Plot

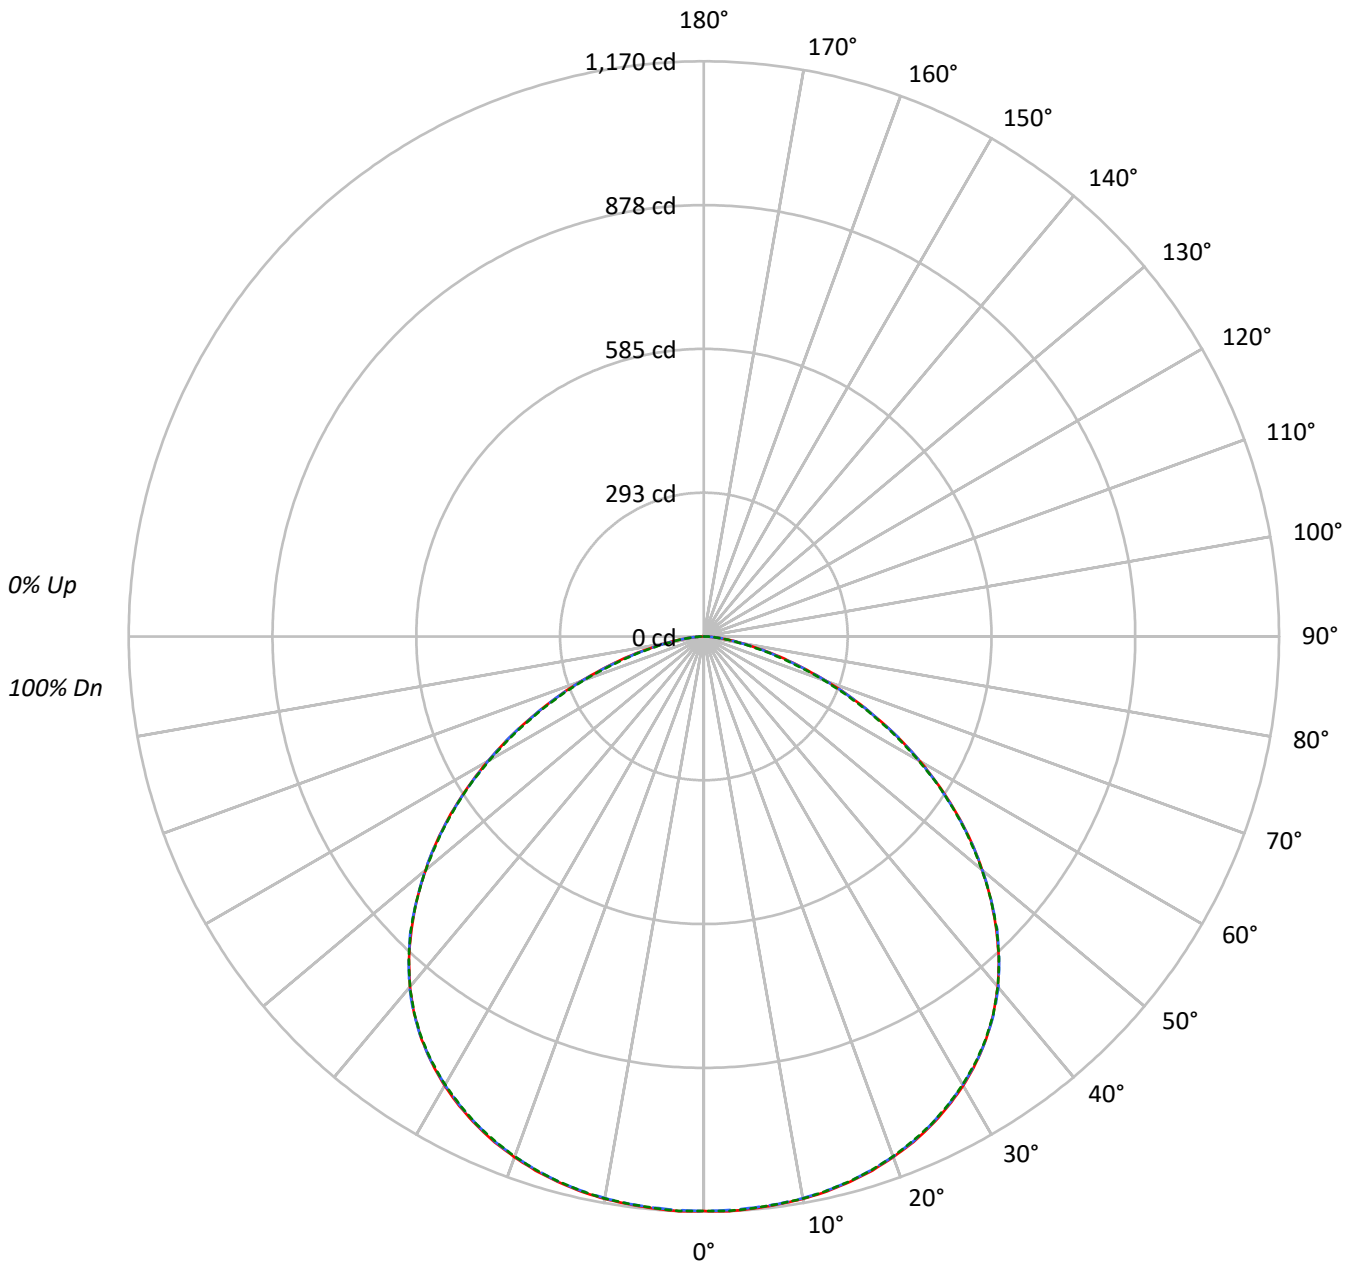



TEST NUMBER: P412736

CATALOG NUMBER: 22PD-40-PP3-L930

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	109	105	101	97	107	103	99	96	98	95	93	95	92	90	91	89	87	85			
2	100	92	85	80	97	90	84	79	87	81	77	83	79	75	80	77	74	72			
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61			
4	84	72	63	57	81	70	62	56	68	61	55	66	60	55	64	58	54	52			
5	77	64	55	49	75	63	55	49	61	54	48	59	53	47	57	51	47	45			
6	71	58	49	43	69	57	48	42	55	48	42	53	47	42	52	46	41	39			
7	66	52	44	38	64	51	43	37	50	43	37	49	42	37	47	41	37	35			
8	61	48	39	33	60	47	39	33	46	38	33	44	38	33	43	37	33	31			
9	57	44	36	30	56	43	35	30	42	35	30	41	34	30	40	34	29	28			
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3145	3145	3145
5°	3155	3150	3153
10°	3174	3170	3172
15°	3199	3196	3196
20°	3227	3224	3223
25°	3256	3250	3250
30°	3278	3273	3271
35°	3288	3288	3284
40°	3267	3273	3267
45°	3202	3210	3206
50°	3094	3099	3091
55°	2945	2938	2933
60°	2734	2728	2707
65°	2443	2440	2413
70°	2087	2076	2029
75°	1664	1615	1566
80°	1185	1161	1100
85°	772	772	747



TEST NUMBER: P412736

CATALOG NUMBER: 22PD-40-PP3-L930

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.1	3.3
10°-20°	324.2	9.7
20°-30°	504.8	15.1
30°-40°	624.8	18.6
40°-50°	647.8	19.3
50°-60°	558.4	16.7
60°-70°	379.6	11.3
70°-80°	169.9	5.1
80°-90°	32.4	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	940.1	28.0
0°-40°	1564.9	46.7
0°-60°	2771.1	82.6
0°-90°	3353.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3353.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1169	1169	1169	1169	1169	
5°	1168	1166	1166	1166	1167	111
15°	1148	1146	1147	1146	1147	325
25°	1096	1095	1094	1094	1094	506
35°	1001	1000	1001	999	1000	625
45°	841	840	844	842	842	648
55°	628	626	626	625	625	560
65°	384	387	383	382	379	381
75°	160	160	155	154	151	172
85°	25	26	25	24	24	33
90°	0	0	0	0	0	



TEST NUMBER: P412736

CATALOG NUMBER: 22PD-40-PP3-L930

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1168.7	1168.7	1168.7	1168.7	1168.7
2.5°	1170.2	1167.9	1167.9	1168.3	1169.5
5°	1167.9	1165.5	1166.3	1165.9	1167.1
7.5°	1164.8	1162.8	1164.0	1163.2	1164.0
10°	1161.6	1159.7	1160.1	1159.7	1160.9
12.5°	1156.2	1153.8	1154.6	1154.6	1155.0
15°	1148.4	1146.4	1147.2	1146.4	1147.2
17.5°	1139.0	1136.7	1137.1	1136.7	1137.5
20°	1126.9	1125.4	1125.7	1125.0	1125.4
22.5°	1113.3	1111.3	1111.7	1110.9	1110.9
25°	1096.5	1094.9	1094.5	1094.1	1094.5
27.5°	1077.0	1075.0	1075.0	1074.6	1074.6
30°	1055.1	1053.2	1053.2	1052.8	1052.8
32.5°	1029.4	1028.6	1029.0	1028.2	1027.8
35°	1000.9	999.7	1000.9	999.3	999.7
37.5°	967.7	966.2	968.5	966.9	967.3
40°	929.9	929.1	931.8	930.6	929.9
42.5°	887.7	887.7	888.9	889.3	888.5
45°	841.3	840.5	843.6	841.7	842.5
47.5°	791.3	790.2	792.5	792.1	791.7
50°	739.1	738.3	740.2	738.3	738.3
52.5°	684.8	684.4	684.8	682.9	682.5
55°	627.8	625.5	626.3	625.1	625.1
57.5°	568.5	565.8	566.2	565.8	566.2
60°	508.0	507.3	506.9	504.9	503.0
62.5°	446.0	446.8	446.4	443.7	441.7
65°	383.6	386.7	383.2	382.0	378.9
67.5°	324.7	325.8	323.5	320.8	317.2
70°	265.3	267.7	263.8	261.0	257.9
72.5°	208.8	210.3	206.8	205.2	201.3
75°	160.0	160.4	155.3	154.5	150.6
77.5°	113.9	115.5	111.6	111.6	107.7
80°	76.5	79.2	74.9	73.7	71.0
82.5°	48.0	48.4	47.2	46.0	44.9
85°	25.0	25.8	25.0	24.2	24.2
87.5°	9.4	9.8	9.4	9.0	9.4
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)