

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P413074

Luminaire Tested: **22PD-40-PC3-L835**

Issue Date: 9/15/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P413074  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 9/15/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: 22PD-40-PC3-L835  
Description: 4000 LUMEN 2X2 PERCEIVE LED TROFFER WITH PYRAMID PATTERN OPTICS AND 80 CRI, 3500 CCT LEDS  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3991.0 lumens  
Efficiency: N/A  
Efficacy: 122.4 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37  
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 32.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P413074

CATALOG NUMBER: 22PD-40-PC3-L835

### Luminous Intensity Polar Plot

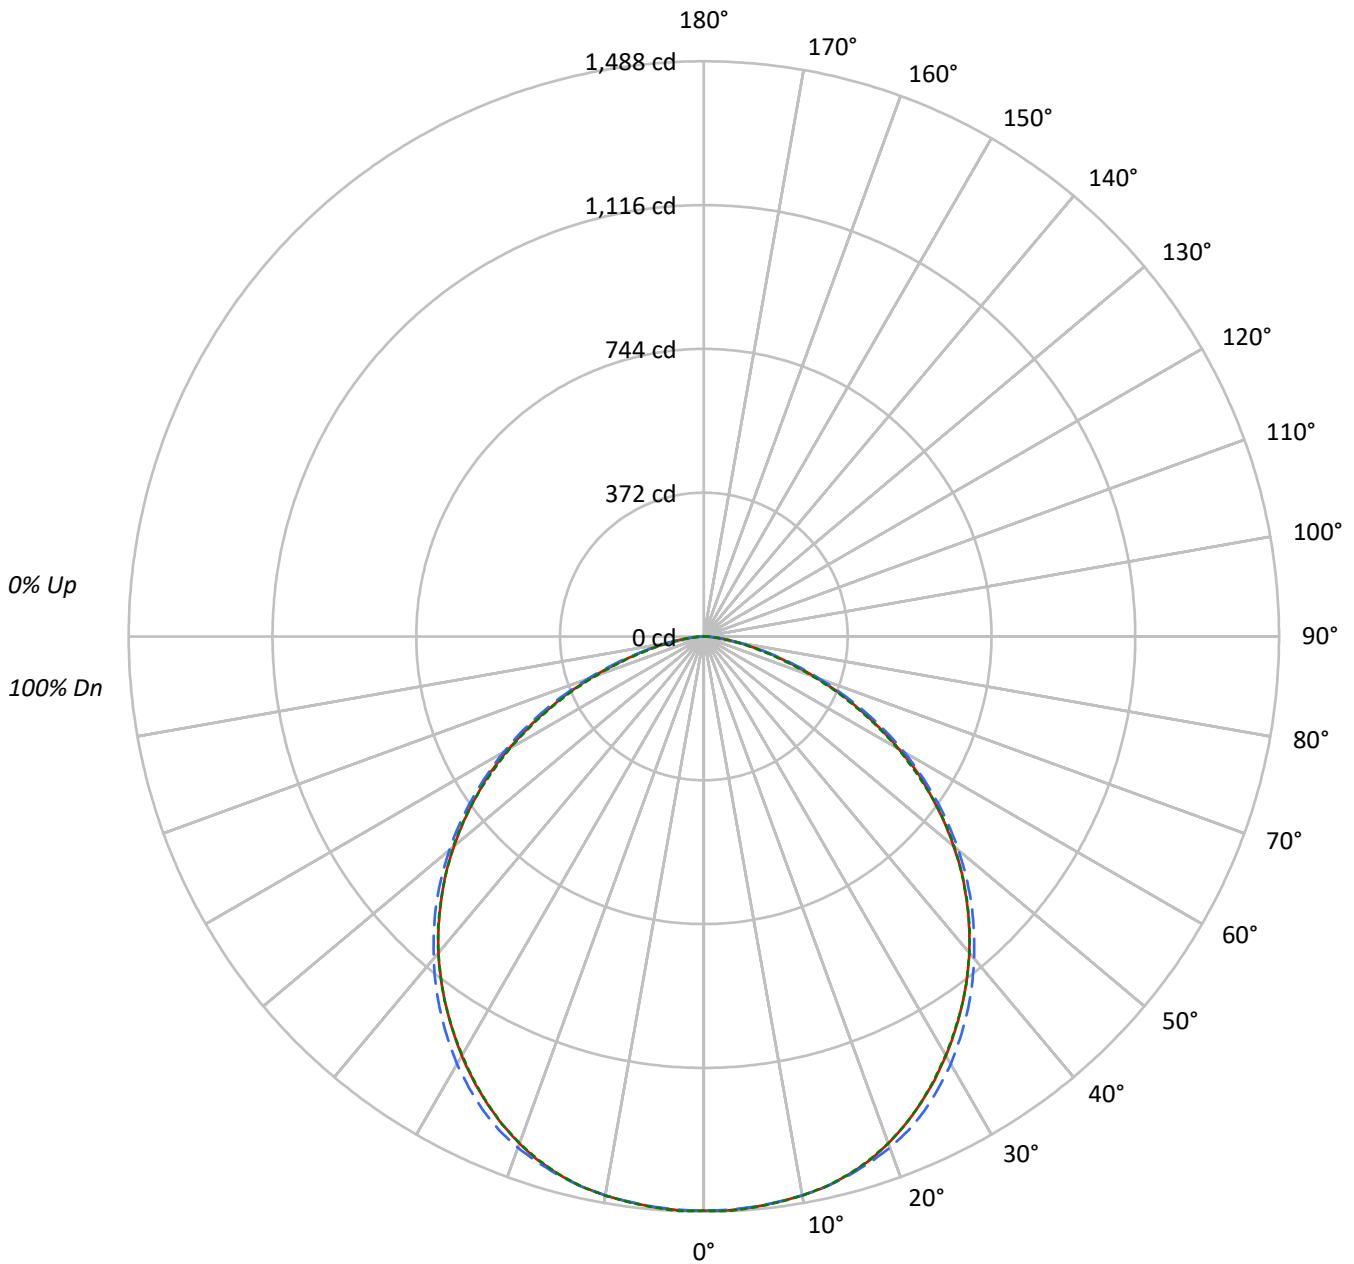



TEST NUMBER: P413074

CATALOG NUMBER: 22PD-40-PC3-L835

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85																			
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72																			
3	91	81	73	67	89	80	72	67	77	70	65	74	69	64	71	67	63	61																			
4	84	72	64	57	82	71	63	57	68	61	56	66	60	55	64	59	54	52																			
5	77	65	56	49	75	63	55	49	61	54	49	59	53	48	58	52	47	45																			
6	71	58	49	43	69	57	49	43	55	48	43	54	47	42	52	46	42	40																			
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35																			
8	62	48	40	34	60	48	40	34	46	39	34	45	38	34	44	38	33	31																			
9	58	44	36	31	56	44	36	31	43	35	30	41	35	30	40	34	30	28																			
10	54	41	33	28	53	40	33	28	39	32	28	38	32	28	38	32	27	26																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3998	3998	3998
5°	4003	4000	4005
10°	4013	4012	4013
15°	4018	4023	4016
20°	3997	4030	3995
25°	3951	4016	3948
30°	3892	3969	3887
35°	3825	3901	3825
40°	3753	3819	3753
45°	3654	3726	3659
50°	3529	3598	3543
55°	3365	3432	3365
60°	3138	3217	3118
65°	2816	2916	2780
70°	2409	2495	2338
75°	1911	1965	1813
80°	1370	1421	1303
85°	905	932	846



TEST NUMBER: P413074

CATALOG NUMBER: 22PD-40-PC3-L835

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.0	3.5
10°-20°	407.1	10.2
20°-30°	617.7	15.5
30°-40°	737.7	18.5
40°-50°	750.2	18.8
50°-60°	648.9	16.3
60°-70°	446.5	11.2
70°-80°	202.7	5.1
80°-90°	39.2	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1165.8	29.2
0°-40°	1903.5	47.7
0°-60°	3302.6	82.8
0°-90°	3991.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3991.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1486	1486	1486	1486	1486	
5°	1482	1480	1481	1481	1483	141
15°	1442	1443	1444	1442	1442	407
25°	1331	1342	1352	1340	1330	613
35°	1164	1185	1187	1183	1164	728
45°	960	978	979	978	962	740
55°	717	730	732	730	717	641
65°	442	455	458	454	437	439
75°	184	191	189	187	174	198
85°	29	31	30	29	27	38
90°	0	0	0	0	0	



TEST NUMBER: P413074

CATALOG NUMBER: 22PD-40-PC3-L835

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1485.6	1485.6	1485.6	1485.6	1485.6
2.5°	1485.6	1483.7	1484.2	1484.7	1487.5
5°	1481.8	1480.4	1480.9	1480.9	1482.8
7.5°	1475.7	1475.2	1475.2	1474.7	1476.2
10°	1468.6	1467.6	1468.1	1467.6	1468.6
12.5°	1457.7	1457.7	1458.2	1456.8	1457.7
15°	1442.1	1443.1	1444.0	1441.7	1441.7
17.5°	1422.3	1424.6	1427.0	1422.8	1420.4
20°	1395.8	1401.5	1407.2	1400.6	1394.9
22.5°	1365.1	1374.6	1383.1	1372.7	1365.1
25°	1330.6	1342.4	1352.4	1340.1	1329.7
27.5°	1293.3	1306.5	1316.0	1305.6	1291.4
30°	1252.7	1268.7	1277.2	1267.3	1250.8
32.5°	1209.2	1228.1	1233.3	1227.1	1208.2
35°	1164.3	1185.1	1187.4	1183.2	1164.3
37.5°	1117.5	1137.4	1139.2	1136.9	1117.5
40°	1068.4	1086.8	1087.3	1087.3	1068.4
42.5°	1015.9	1033.9	1033.9	1033.4	1017.3
45°	960.2	977.6	979.1	978.1	961.6
47.5°	904.9	918.1	920.5	918.6	903.9
50°	843.0	856.7	859.5	857.6	846.3
52.5°	781.5	794.3	797.1	795.7	783.0
55°	717.3	729.6	731.5	730.0	717.3
57.5°	655.4	663.4	665.3	662.5	646.4
60°	583.1	594.4	597.7	594.4	579.3
62.5°	513.2	525.4	528.3	523.6	507.5
65°	442.3	454.6	457.9	454.1	436.6
67.5°	375.2	384.2	387.0	382.7	366.7
70°	306.2	317.5	317.1	311.4	297.2
72.5°	238.2	253.7	250.9	247.6	232.0
75°	183.8	190.9	189.0	187.1	174.4
77.5°	131.4	139.9	135.1	135.6	124.7
80°	88.4	96.4	91.7	89.8	84.1
82.5°	56.2	59.5	58.6	57.6	52.4
85°	29.3	31.2	30.2	29.3	27.4
87.5°	11.3	12.3	11.3	11.3	10.4
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)