

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P413098

Luminaire Tested: **22PD-50-PC3-L940**

Issue Date: 9/15/2020



**Test Information**

Test Method: LM-79-08  
Report Number: P413098  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 9/15/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: 22PD-50-PC3-L940  
Description: 5000 LUMEN 2X2 PERCEIVE LED TROFFER WITH PYRAMID PATTERN OPTICS AND 90 CRI, 4000 CCT LEDS  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4214.0 lumens  
Efficiency: N/A  
Efficacy: 100.6 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37  
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 41.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P413098

CATALOG NUMBER: 22PD-50-PC3-L940

### Luminous Intensity Polar Plot

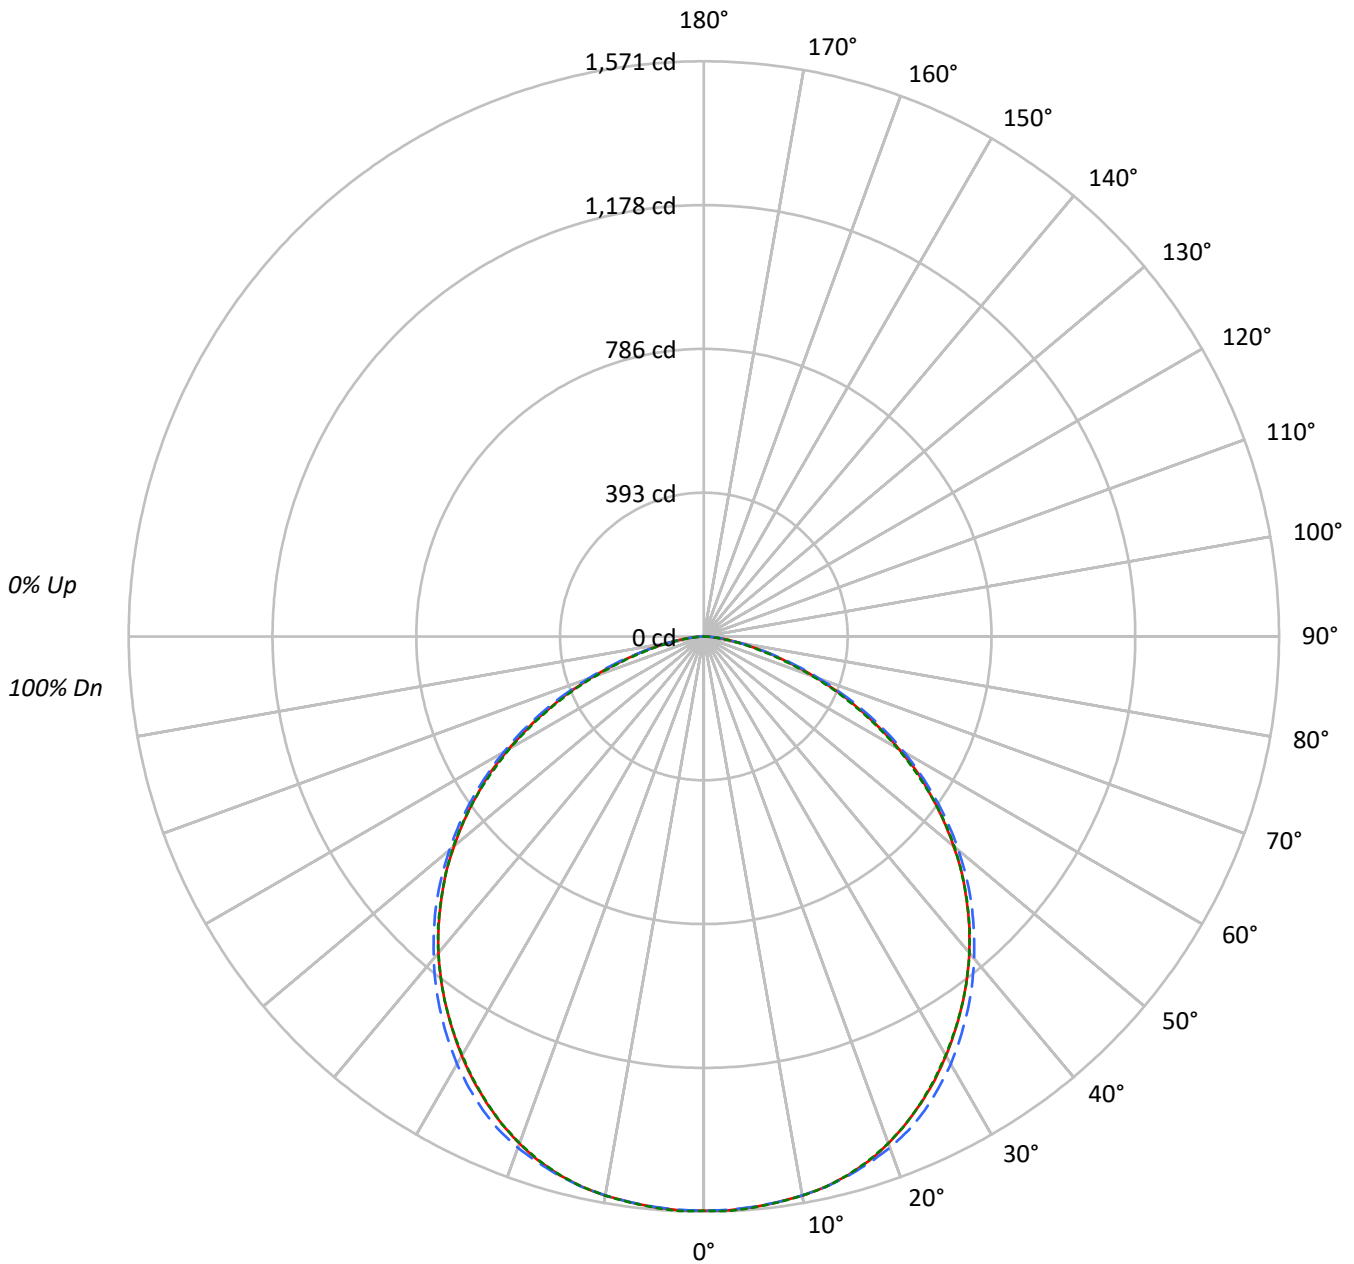



TEST NUMBER: P413098

CATALOG NUMBER: 22PD-50-PC3-L940

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85																			
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72																			
3	91	81	73	67	89	80	72	67	77	70	65	74	69	64	71	67	63	61																			
4	84	72	64	57	82	71	63	57	68	61	56	66	60	55	64	59	54	52																			
5	77	65	56	49	75	63	55	49	61	54	49	59	53	48	58	52	47	45																			
6	71	58	49	43	69	57	49	43	55	48	43	54	47	42	52	46	42	40																			
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35																			
8	62	48	40	34	60	48	40	34	46	39	34	45	38	34	44	38	33	31																			
9	58	44	36	31	56	44	36	31	43	35	30	41	35	30	40	34	30	28																			
10	54	41	33	28	53	40	33	28	39	32	28	38	32	28	38	32	27	26																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4221	4221	4221
5°	4226	4224	4229
10°	4237	4236	4237
15°	4242	4248	4241
20°	4220	4255	4218
25°	4172	4240	4169
30°	4110	4190	4103
35°	4038	4119	4038
40°	3963	4033	3963
45°	3858	3934	3864
50°	3726	3799	3741
55°	3553	3623	3553
60°	3314	3397	3292
65°	2974	3079	2935
70°	2544	2634	2469
75°	2018	2075	1914
80°	1446	1500	1376
85°	954	985	892



TEST NUMBER: P413098

CATALOG NUMBER: 22PD-50-PC3-L940

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	148.8	3.5
10°-20°	429.9	10.2
20°-30°	652.2	15.5
30°-40°	778.9	18.5
40°-50°	792.1	18.8
50°-60°	685.2	16.3
60°-70°	471.5	11.2
70°-80°	214.0	5.1
80°-90°	41.4	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1230.9	29.2
0°-40°	2009.8	47.7
0°-60°	3487.1	82.8
0°-90°	4214.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4214.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1569	1569	1569	1569	1569	
5°	1565	1563	1564	1564	1566	149
15°	1523	1524	1525	1522	1522	429
25°	1405	1417	1428	1415	1404	647
35°	1229	1251	1254	1249	1229	769
45°	1014	1032	1034	1033	1015	782
55°	757	770	772	771	757	677
65°	467	480	484	480	461	463
75°	194	202	200	198	184	209
85°	31	33	32	31	29	41
90°	0	0	0	0	0	



TEST NUMBER: P413098

CATALOG NUMBER: 22PD-50-PC3-L940

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1568.6	1568.6	1568.6	1568.6	1568.6
2.5°	1568.6	1566.6	1567.1	1567.6	1570.6
5°	1564.6	1563.1	1563.6	1563.6	1565.6
7.5°	1558.1	1557.6	1557.6	1557.1	1558.6
10°	1550.7	1549.7	1550.2	1549.7	1550.7
12.5°	1539.2	1539.2	1539.7	1538.2	1539.2
15°	1522.7	1523.7	1524.7	1522.2	1522.2
17.5°	1501.8	1504.3	1506.7	1502.3	1499.8
20°	1473.8	1479.8	1485.8	1478.8	1472.8
22.5°	1441.4	1451.4	1460.3	1449.4	1441.4
25°	1405.0	1417.4	1427.9	1414.9	1404.0
27.5°	1365.6	1379.5	1389.5	1378.5	1363.6
30°	1322.6	1339.6	1348.6	1338.1	1320.6
32.5°	1276.7	1296.7	1302.2	1295.7	1275.7
35°	1229.3	1251.3	1253.8	1249.3	1229.3
37.5°	1180.0	1200.9	1202.9	1200.4	1180.0
40°	1128.1	1147.5	1148.0	1148.0	1128.1
42.5°	1072.7	1091.6	1091.6	1091.1	1074.2
45°	1013.8	1032.3	1033.8	1032.8	1015.3
47.5°	955.4	969.4	971.9	969.9	954.4
50°	890.1	904.5	907.5	905.5	893.6
52.5°	825.2	838.7	841.7	840.2	826.7
55°	757.4	770.3	772.3	770.8	757.4
57.5°	692.0	700.5	702.5	699.5	682.5
60°	615.7	627.6	631.1	627.6	611.7
62.5°	541.8	554.8	557.8	552.8	535.8
65°	467.0	480.0	483.5	479.5	461.0
67.5°	396.1	405.6	408.6	404.1	387.2
70°	323.3	335.3	334.8	328.8	313.8
72.5°	251.5	267.9	264.9	261.4	245.0
75°	194.1	201.6	199.6	197.6	184.1
77.5°	138.7	147.7	142.7	143.2	131.7
80°	93.3	101.8	96.8	94.8	88.8
82.5°	59.4	62.9	61.9	60.9	55.4
85°	30.9	32.9	31.9	30.9	28.9
87.5°	12.0	13.0	12.0	12.0	11.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)