

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P412582

Luminaire Tested: **24PD-80-PB1-L927**

Issue Date: 9/15/2020



Test Information

Test Method: LM-79-08
Report Number: P412582
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-911-45)
Test Lab: INNOVATION CENTER
Issue Date: 9/15/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: 24PD-80-PB1-L927
Description: 8000 LUMEN 2X4 PERCEIVE LED TROFFER WITH BEVEL PATTERN OPTICS AND 90 CRI, 2700 CCT LEDS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6128.0 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 1.34 / 1.32 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 61.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P412582

CATALOG NUMBER: 24PD-80-PB1-L927

Luminous Intensity Polar Plot

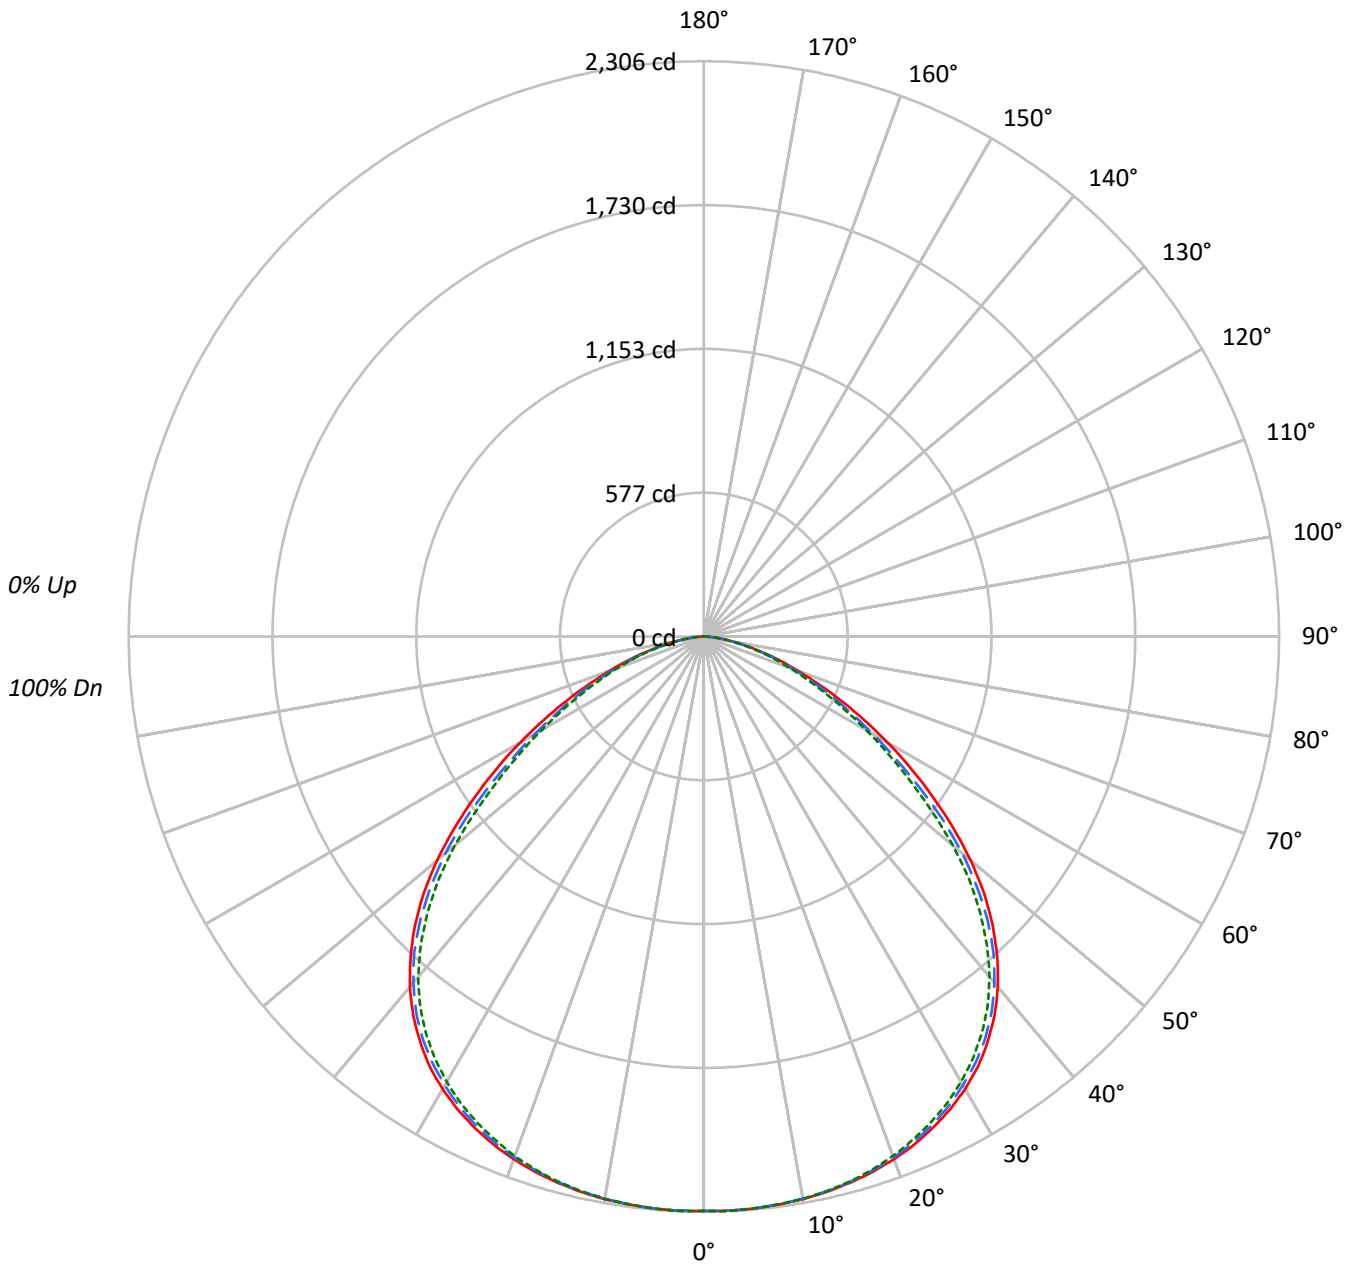



TEST NUMBER: P412582

CATALOG NUMBER: 24PD-80-PB1-L927

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86					86			
2	101	93	87	82	98	91	86	81	88	83	79	85	81	77	82	78	75	73					73			
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	73	69	65	63					63			
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	65	60	56	54					54			
5	78	66	57	51	76	65	57	51	63	56	50	61	55	50	59	54	49	47					47			
6	72	60	51	45	70	59	51	45	57	50	44	55	49	44	54	48	43	41					41			
7	67	54	46	40	65	53	45	40	52	45	39	50	44	39	49	43	39	37					37			
8	63	49	41	35	61	49	41	35	47	40	35	46	40	35	45	39	35	33					33			
9	58	45	37	32	57	45	37	32	44	37	32	43	36	32	42	36	31	30					30			
10	55	42	34	29	53	41	34	29	40	33	29	39	33	29	39	33	29	27					27			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3099	3099	3099
5°	3109	3109	3109
10°	3130	3126	3127
15°	3158	3154	3151
20°	3193	3183	3174
25°	3227	3211	3192
30°	3255	3228	3203
35°	3258	3230	3190
40°	3221	3183	3129
45°	3116	3059	2980
50°	2922	2831	2728
55°	2626	2470	2368
60°	2287	2104	2024
65°	1924	1780	1702
70°	1568	1489	1429
75°	1256	1212	1161
80°	965	890	865
85°	604	584	584



TEST NUMBER: P412582

CATALOG NUMBER: 24PD-80-PB1-L927

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.3	3.6
10°-20°	640.0	10.4
20°-30°	997.0	16.3
30°-40°	1226.5	20.0
40°-50°	1232.0	20.1
50°-60°	949.5	15.5
60°-70°	563.7	9.2
70°-80°	251.0	4.1
80°-90°	49.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1856.3	30.3
0°-40°	3082.8	50.3
0°-60°	5264.3	85.9
0°-90°	6128.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6128.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2303	2303	2303	2303	2303	
5°	2302	2302	2302	2299	2302	219
15°	2267	2267	2264	2260	2262	641
25°	2174	2173	2163	2153	2150	1002
35°	1984	1981	1967	1950	1942	1239
45°	1638	1633	1608	1581	1566	1257
55°	1119	1098	1053	1021	1010	1001
65°	604	578	559	538	535	604
75°	242	237	233	225	223	262
85°	39	37	38	36	38	52
90°	0	0	0	0	0	



TEST NUMBER: P412582

CATALOG NUMBER: 24PD-80-PB1-L927

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2303.0	2303.0	2303.0	2303.0	<i>2303.0</i>
2.5°	<i>2304.2</i>	<i>2303.6</i>	<i>2303.6</i>	<i>2301.1</i>	<i>2306.0</i>
5°	2301.8	2302.4	2301.8	2299.3	<i>2301.8</i>
7.5°	2296.9	2297.5	2296.3	2293.8	<i>2296.3</i>
10°	2290.8	2290.8	2288.3	2287.1	<i>2288.9</i>
12.5°	2280.4	2280.4	2278.0	2276.1	<i>2278.0</i>
15°	2267.0	2267.0	2263.9	2260.3	<i>2262.1</i>
17.5°	2250.5	2250.5	2245.6	2240.7	<i>2241.9</i>
20°	2230.3	2229.7	2223.0	2216.3	<i>2216.9</i>
22.5°	2204.7	2204.1	2195.6	2187.6	<i>2185.2</i>
25°	2173.6	2173.0	2162.6	2152.8	<i>2150.4</i>
27.5°	2137.6	2135.1	2123.5	2112.5	<i>2110.1</i>
30°	2094.8	2093.0	2077.7	2066.8	<i>2061.9</i>
32.5°	2045.4	2040.5	2026.5	2013.0	<i>2006.3</i>
35°	1983.7	1980.7	1966.7	1950.2	<i>1942.2</i>
37.5°	1914.2	1911.1	1895.9	1877.5	<i>1868.4</i>
40°	1833.6	1831.2	1812.2	1793.3	<i>1781.7</i>
42.5°	1740.8	1739.0	1718.8	1692.6	<i>1680.4</i>
45°	1637.7	1633.4	1607.8	1580.9	<i>1566.2</i>
47.5°	1522.9	1515.6	1484.5	1458.8	<i>1442.9</i>
50°	1395.9	1386.2	1352.6	1319.7	<i>1303.2</i>
52.5°	1258.6	1241.5	1206.7	1168.9	<i>1153.0</i>
55°	1119.4	1098.1	1052.9	1021.2	<i>1009.6</i>
57.5°	983.3	952.2	909.5	886.9	<i>875.3</i>
60°	849.7	815.5	781.9	759.9	<i>752.0</i>
62.5°	722.1	693.4	664.7	642.7	<i>637.9</i>
65°	604.3	578.0	559.1	537.7	<i>534.7</i>
67.5°	494.4	482.2	465.1	446.8	<i>444.4</i>
70°	398.6	393.7	378.4	367.5	<i>363.2</i>
72.5°	318.0	313.1	302.1	294.2	<i>293.0</i>
75°	241.7	236.8	233.2	225.2	<i>223.4</i>
77.5°	172.1	172.7	169.7	165.4	<i>166.6</i>
80°	124.5	117.2	114.8	112.3	<i>111.7</i>
82.5°	76.3	72.0	70.2	69.6	<i>70.8</i>
85°	39.1	37.2	37.8	36.0	<i>37.8</i>
87.5°	13.4	13.4	14.0	13.4	<i>14.6</i>
90°	0.0	0.0	0.0	0.0	<i>0.0</i>



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)