

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438662

Luminaire Tested: CB2-055U-055D-927-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438662
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-055U-055D-927-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 550 LUMENS PER FOOT
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9312.8 lumens
Efficiency: N/A
Efficacy: 124.8 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 74.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

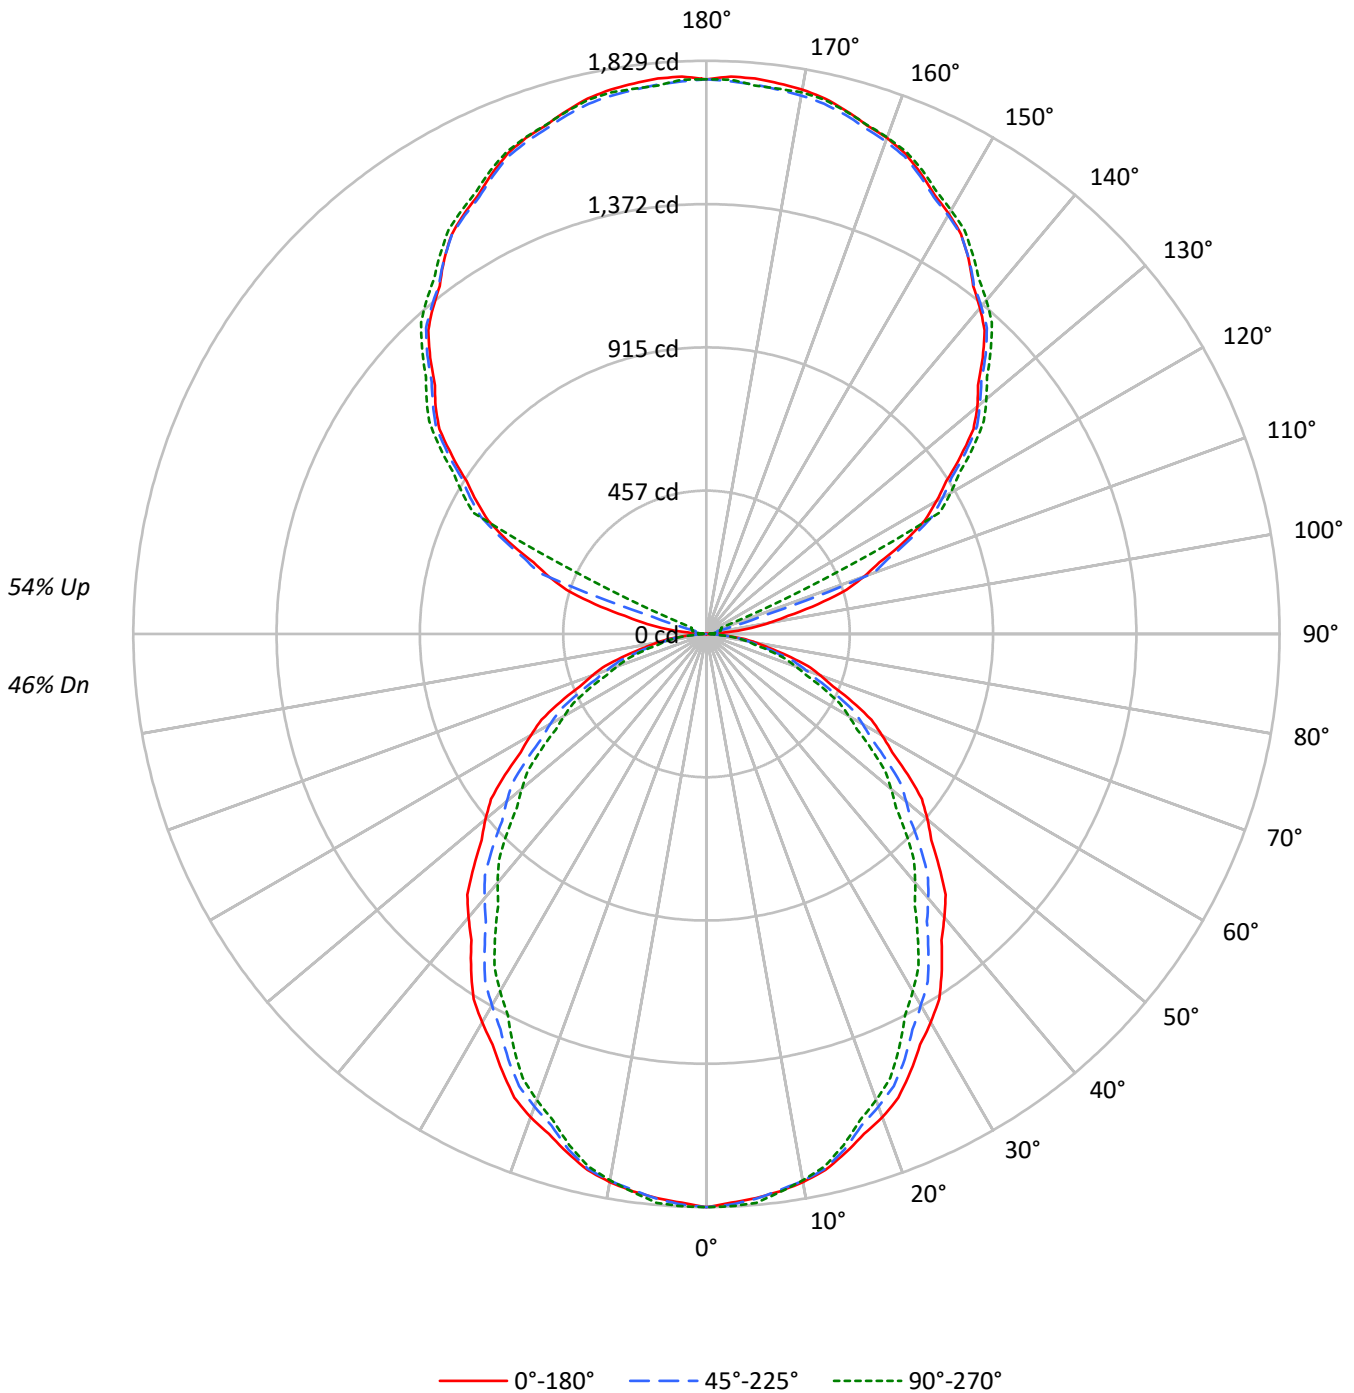



TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	88	81	75	70	81	75	70	65	63	59	56	51	49	46	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	39	37	34	32	28
4	74	63	56	50	68	58	52	46	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	29	30	27	24	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	42	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15930	15930	15930
5°	15795	15819	15930
10°	15705	15668	15656
15°	15456	15355	15229
20°	15213	14875	14668
25°	14805	14387	13983
30°	14394	13761	13240
35°	13923	13118	12493
40°	13423	12515	11782
45°	12921	11885	11092
50°	12467	11272	10417
55°	11908	10633	9782
60°	11271	10025	9148
65°	10592	9351	8515
70°	9844	8594	7702
75°	8954	7776	6975
80°	8009	6816	6324
85°	6155	5596	4616

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12921 cd/sqm



TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.0	1.8
10°-20°	479.5	5.1
20°-30°	689.4	7.4
30°-40°	774.9	8.3
40°-50°	748.6	8.0
50°-60°	632.5	6.8
60°-70°	454.3	4.9
70°-80°	248.3	2.7
80°-90°	66.0	0.7
90°-100°	30.9	0.3
100°-110°	196.3	2.1
110°-120°	623.8	6.7
120°-130°	905.2	9.7
130°-140°	973.6	10.5
140°-150°	916.6	9.8
150°-160°	746.7	8.0
160°-170°	486.0	5.2
170°-180°	168.0	1.8
0°-30°	1341.0	14.4
0°-40°	2115.9	22.7
0°-60°	3496.9	37.5
0°-90°	4265.5	45.8
90°-120°	851.0	9.1
90°-150°	3646.4	39.2
90°-180°	5047.0	54.2
0°-180°	9312.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1829	1829	1829	1829	1829	
5°	1807	1831	1810	1810	1822	172
15°	1714	1729	1703	1686	1689	483
25°	1541	1542	1497	1463	1455	709
35°	1310	1294	1234	1186	1175	818
45°	1049	1027	965	914	901	811
55°	784	756	700	657	644	701
65°	514	495	454	421	413	510
75°	266	250	231	213	207	285
85°	62	58	56	49	46	73
90°	0	0	0	1	1	5
95°	70	20	22	14	13	89
105°	369	382	38	45	47	388
115°	698	713	719	728	417	686
125°	991	1008	1009	1026	1039	886
135°	1247	1262	1259	1268	1284	961
145°	1459	1470	1460	1462	1481	912
155°	1620	1630	1613	1609	1632	747
165°	1728	1733	1715	1708	1725	488
175°	1779	1783	1760	1748	1757	169
180°	1770	1770	1770	1770	1770	

TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1829.2	1829.2	1829.2	1829.2	1829.2
2.5°	1816.9	1838.8	1822.5	1824.8	1828.1
5°	1806.8	1831.4	1809.6	1809.9	1822.2
7.5°	1793.9	1817.2	1789.7	1784.6	1796.1
10°	1776.0	1799.3	1771.8	1762.2	1770.4
12.5°	1752.4	1774.6	1748.2	1733.0	1740.1
15°	1714.3	1729.4	1703.1	1686.4	1689.1
17.5°	1672.9	1682.2	1644.3	1630.2	1627.5
20°	1641.5	1649.7	1605.1	1585.4	1582.7
22.5°	1601.2	1608.3	1561.4	1537.2	1533.4
25°	1540.7	1542.0	1497.2	1463.4	1455.2
27.5°	1477.4	1473.0	1423.3	1383.3	1372.6
30°	1431.4	1425.9	1368.4	1326.2	1316.6
32.5°	1382.1	1372.3	1314.6	1269.0	1259.4
35°	1309.6	1294.5	1233.9	1186.1	1175.1
37.5°	1232.3	1215.3	1155.8	1103.7	1091.4
40°	1180.7	1161.5	1100.9	1048.8	1036.4
42.5°	1129.2	1107.8	1046.0	993.8	980.4
45°	1049.1	1027.1	965.0	914.3	900.6
47.5°	972.9	944.9	884.6	834.2	820.5
50°	920.2	890.1	832.0	782.6	768.9
52.5°	866.4	835.2	779.3	732.2	718.5
55°	784.3	755.6	700.3	656.6	644.3
57.5°	703.1	675.4	625.0	583.2	571.2
60°	647.1	623.8	575.6	536.2	525.2
62.5°	593.3	572.2	526.3	490.2	479.3
65°	514.0	494.8	453.8	421.4	413.2
67.5°	437.0	417.8	384.6	355.5	346.2
70°	386.6	367.4	337.5	310.7	302.5
72.5°	338.4	318.1	293.8	269.3	263.3
75°	266.1	249.7	231.1	212.8	207.3
77.5°	202.2	186.4	172.8	159.9	158.5
80°	159.7	146.0	135.9	127.4	126.1
82.5°	119.3	108.9	102.2	96.1	95.8
85°	61.6	57.5	56.0	49.0	46.2
87.5°	17.9	17.9	15.7	13.7	13.7
90°	0.0	0.0	0.0	1.3	1.3
92.5°	19.5	7.4	5.1	7.4	7.4
95°	70.4	20.3	21.8	14.1	12.8
97.5°	146.2	32.8	31.5	34.6	35.8
100°	203.5	67.1	34.6	39.7	41.0
102.5°	267.0	252.7	35.6	42.8	45.1
105°	368.6	382.4	38.4	44.9	47.4
107.5°	468.4	482.2	178.7	46.4	48.9
110°	535.0	548.8	565.7	47.4	49.9



TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	597.5	614.2	627.2	105.5	52.0
115°	697.5	712.6	719.3	727.6	417.2
117.5°	785.9	804.4	812.0	826.4	840.4
120°	847.3	864.8	870.3	884.8	899.8
122.5°	907.7	923.2	926.6	943.1	957.1
125°	990.6	1008.2	1008.6	1025.5	1039.3
127.5°	1073.6	1088.6	1087.9	1100.5	1115.8
130°	1128.9	1138.9	1139.1	1149.7	1166.0
132.5°	1174.9	1189.0	1189.3	1197.8	1214.1
135°	1246.6	1261.6	1259.4	1267.5	1283.7
137.5°	1313.9	1328.5	1324.4	1331.2	1348.0
140°	1358.0	1370.5	1364.4	1371.2	1390.0
142.5°	1398.9	1411.4	1402.3	1408.1	1427.9
145°	1459.1	1470.3	1460.4	1462.1	1480.8
147.5°	1512.6	1523.6	1511.6	1513.2	1530.8
150°	1547.4	1557.4	1542.3	1544.0	1561.5
152.5°	1578.1	1587.1	1570.9	1570.6	1591.2
155°	1620.4	1630.4	1612.7	1609.3	1631.9
157.5°	1658.7	1668.0	1650.3	1647.9	1665.4
160°	1684.3	1690.6	1672.8	1669.4	1686.9
162.5°	1701.8	1709.0	1691.3	1685.8	1703.3
165°	1727.9	1732.9	1715.1	1707.8	1725.3
167.5°	1750.4	1756.1	1733.2	1726.8	1745.5
170°	1763.7	1767.5	1744.5	1736.0	1754.7
172.5°	1771.9	1774.6	1751.7	1742.0	1754.7
175°	1779.1	1782.8	1759.9	1748.5	1757.3
177.5°	1780.3	1782.3	1765.0	1755.1	1770.1
180°	1770.1	1770.1	1770.1	1770.1	1770.1



TEST NUMBER: P1438662

CATALOG NUMBER: CB2-055U-055D-927-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.22	17.03	17.21	18.03	19.37	15.12	15.93	16.11	16.94	18.27
	3H	17.86	18.59	18.86	19.60	20.95	16.64	17.37	17.65	18.38	19.74
	4H	18.48	19.17	19.50	20.19	21.55	17.21	17.90	18.23	18.92	20.28
	6H	18.88	19.52	19.91	20.54	21.91	17.58	18.22	18.61	19.24	20.61
	8H	19.03	19.64	20.07	20.67	22.04	17.72	18.33	18.75	19.36	20.73
	12H	19.10	19.68	20.14	20.71	22.10	17.78	18.36	18.82	19.39	20.78
4H	2H	16.62	17.31	17.64	18.33	19.69	15.75	16.44	16.77	17.45	18.81
	3H	18.48	19.06	19.52	20.11	21.48	17.48	18.05	18.51	19.10	20.47
	4H	19.23	19.76	20.27	20.79	22.19	18.15	18.67	19.19	19.71	21.11
	6H	19.75	20.20	20.80	21.26	22.65	18.62	19.07	19.67	20.13	21.52
	8H	19.95	20.37	21.00	21.43	22.83	18.81	19.23	19.86	20.29	21.69
	12H	20.05	20.44	21.12	21.50	22.91	18.89	19.28	19.96	20.34	21.76
8H	4H	19.38	19.80	20.43	20.86	22.26	18.42	18.84	19.47	19.89	21.30
	6H	20.02	20.37	21.10	21.47	22.87	19.02	19.37	20.09	20.46	21.87
	8H	20.31	20.62	21.39	21.70	23.12	19.29	19.60	20.38	20.68	22.10
	12H	20.48	20.75	21.57	21.83	23.29	19.44	19.71	20.53	20.79	22.25
12H	4H	19.36	19.74	20.43	20.81	22.22	18.42	18.80	19.49	19.87	21.28
	6H	20.05	20.36	21.13	21.44	22.86	19.08	19.39	20.16	20.47	21.89
	8H	20.36	20.63	21.45	21.71	23.17	19.39	19.66	20.47	20.73	22.19