

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438650

Luminaire Tested: CB2-055U-030D-930-1D-UNV-STD-W-8

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1438650  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB2-055U-030D-930-1D-UNV-STD-W-8  
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT  
2-INCH APERTURE  
DOWNLIGHT 300 LUMENS PER FOOT  
UPLIGHT 550 LUMENS PER FOOT  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7737.1 lumens  
Efficiency: N/A  
Efficacy: 137.4 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 56.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1438650

CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

### Luminous Intensity Polar Plot

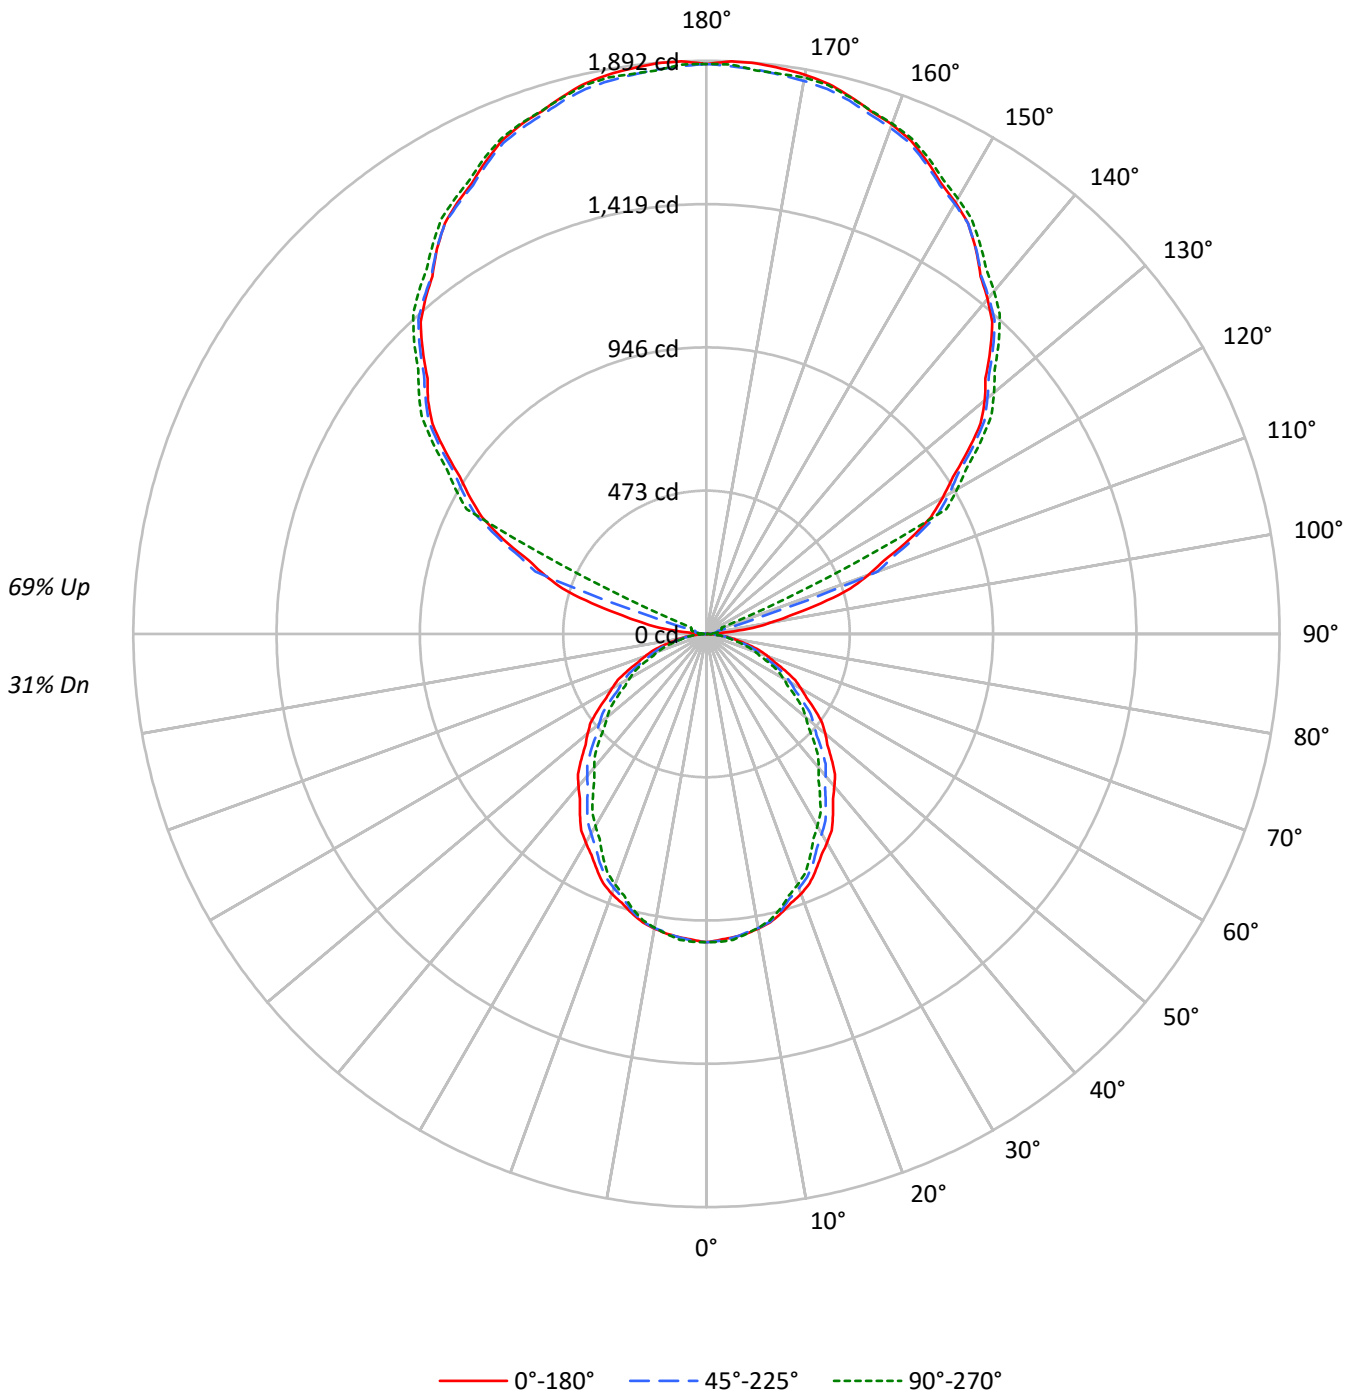



TEST NUMBER: P1438650

CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	94	89	86	82	84	80	77	75	64	62	60	48	47	46	34	33	33	26
2	85	78	72	67	76	70	65	61	56	52	50	42	40	38	30	29	28	22
3	78	69	62	56	70	62	56	51	49	45	42	38	35	32	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	36	34	30	28	24	22	20	16
5	65	54	46	41	58	49	42	37	39	34	31	30	27	24	22	20	18	14
6	60	48	41	35	54	44	37	32	35	30	27	27	24	21	20	17	16	12
7	55	44	36	31	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	40	32	27	46	36	29	25	29	24	21	23	19	17	16	14	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11	9
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8862	8862	8862
5°	8787	8801	8862
10°	8737	8717	8709
15°	8598	8543	8472
20°	8463	8276	8160
25°	8236	8004	7779
30°	8008	7656	7365
35°	7745	7298	6950
40°	7468	6962	6555
45°	7188	6612	6170
50°	6935	6270	5796
55°	6624	5915	5442
60°	6270	5577	5089
65°	5893	5203	4737
70°	5477	4782	4285
75°	4980	4327	3880
80°	4453	3791	3516
85°	3427	3118	2568

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7188 cd/sqm



TEST NUMBER: P1438650

CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	95.7	1.2
10°-20°	266.8	3.4
20°-30°	383.6	5.0
30°-40°	431.1	5.6
40°-50°	416.4	5.4
50°-60°	351.9	4.5
60°-70°	252.7	3.3
70°-80°	138.1	1.8
80°-90°	36.8	0.5
90°-100°	32.8	0.4
100°-110°	208.7	2.7
110°-120°	663.0	8.6
120°-130°	962.1	12.4
130°-140°	1034.7	13.4
140°-150°	974.2	12.6
150°-160°	793.6	10.3
160°-170°	516.5	6.7
170°-180°	178.6	2.3
0°-30°	746.0	9.6
0°-40°	1177.1	15.2
0°-60°	1945.4	25.1
0°-90°	2373.1	30.7
90°-120°	904.4	11.7
90°-150°	3875.3	50.1
90°-180°	5364.0	69.3
0°-180°	7737.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1018	1018	1018	1018	1018	
5°	1005	1019	1007	1007	1014	95
15°	954	962	948	938	940	269
25°	857	858	833	814	810	395
35°	728	720	686	660	654	455
45°	584	571	537	509	501	451
55°	436	420	390	365	358	390
65°	286	275	252	234	230	284
75°	148	139	129	118	115	158
85°	34	32	31	27	26	41
90°	0	0	0	1	1	4
95°	75	22	23	15	14	95
105°	392	406	41	48	50	413
115°	741	757	764	773	443	729
125°	1053	1072	1072	1090	1104	941
135°	1325	1341	1338	1347	1364	1022
145°	1551	1563	1552	1554	1574	969
155°	1722	1733	1714	1710	1734	794
165°	1836	1842	1823	1815	1834	519
175°	1891	1895	1870	1858	1868	180
180°	1881	1881	1881	1881	1881	



TEST NUMBER: P1438650

CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1017.6	1017.6	1017.6	1017.6	1017.6
2.5°	1010.8	1023.0	1013.9	1015.2	1017.0
5°	1005.2	1018.9	1006.7	1006.9	1013.7
7.5°	998.0	1010.9	995.6	992.8	999.2
10°	988.0	1001.0	985.7	980.3	984.9
12.5°	974.9	987.3	972.6	964.1	968.1
15°	953.7	962.1	947.5	938.2	939.7
17.5°	930.7	935.8	914.8	906.9	905.4
20°	913.2	917.8	893.0	882.0	880.5
22.5°	890.8	894.7	868.6	855.2	853.1
25°	857.1	857.9	833.0	814.1	809.6
27.5°	821.9	819.5	791.8	769.5	763.6
30°	796.3	793.3	761.3	737.8	732.4
32.5°	768.9	763.4	731.3	706.0	700.6
35°	728.5	720.2	686.5	659.8	653.7
37.5°	685.5	676.1	643.0	614.0	607.1
40°	656.9	646.2	612.4	583.5	576.6
42.5°	628.2	616.3	581.9	552.9	545.4
45°	583.6	571.4	536.9	508.6	501.0
47.5°	541.2	525.7	492.1	464.1	456.4
50°	511.9	495.2	462.8	435.4	427.8
52.5°	482.0	464.6	433.5	407.3	399.7
55°	436.3	420.3	389.6	365.3	358.4
57.5°	391.2	375.8	347.7	324.5	317.8
60°	360.0	347.0	320.2	298.3	292.2
62.5°	330.1	318.3	292.8	272.7	266.6
65°	286.0	275.3	252.5	234.4	229.9
67.5°	243.1	232.4	214.0	197.8	192.6
70°	215.1	204.4	187.8	172.9	168.3
72.5°	188.3	177.0	163.5	149.8	146.5
75°	148.0	138.9	128.6	118.4	115.3
77.5°	112.5	103.7	96.2	89.0	88.2
80°	88.8	81.2	75.6	70.9	70.1
82.5°	66.4	60.6	56.9	53.4	53.3
85°	34.3	32.0	31.2	27.2	25.7
87.5°	10.0	10.0	8.7	7.8	7.8
90°	0.0	0.0	0.0	1.4	1.4
92.5°	20.7	7.9	5.4	7.9	7.9
95°	74.8	21.6	23.1	14.9	13.6
97.5°	155.3	34.8	33.5	36.8	38.1
100°	216.3	71.3	36.7	42.2	43.5
102.5°	283.7	268.6	37.8	45.5	47.9
105°	391.8	406.4	40.8	47.7	50.3
107.5°	497.9	512.5	189.9	49.3	52.0
110°	568.6	583.2	601.2	50.4	53.0



TEST NUMBER: P1438650

CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	635.0	652.8	666.5	112.2	55.2
115°	741.3	757.3	764.5	773.3	443.4
117.5°	835.2	854.9	862.9	878.2	893.1
120°	900.5	919.1	925.0	940.3	956.3
122.5°	964.7	981.2	984.8	1002.3	1017.2
125°	1052.8	1071.5	1071.9	1089.9	1104.5
127.5°	1141.0	1156.9	1156.2	1169.6	1185.9
130°	1199.7	1210.4	1210.6	1221.9	1239.2
132.5°	1248.7	1263.6	1263.9	1273.0	1290.3
135°	1324.9	1340.8	1338.5	1347.0	1364.3
137.5°	1396.4	1411.9	1407.6	1414.8	1432.6
140°	1443.2	1456.5	1450.0	1457.3	1477.2
142.5°	1486.8	1500.1	1490.3	1496.5	1517.5
145°	1550.7	1562.7	1552.0	1553.9	1573.8
147.5°	1607.5	1619.2	1606.5	1608.2	1626.9
150°	1644.5	1655.2	1639.1	1640.9	1659.5
152.5°	1677.2	1686.8	1669.6	1669.3	1691.1
155°	1722.1	1732.7	1713.9	1710.4	1734.3
157.5°	1762.9	1772.7	1753.9	1751.3	1770.0
160°	1790.1	1796.7	1777.8	1774.2	1792.8
162.5°	1808.6	1816.3	1797.4	1791.6	1810.2
165°	1836.3	1841.7	1822.7	1815.0	1833.6
167.5°	1860.3	1866.4	1842.1	1835.2	1855.1
170°	1874.4	1878.4	1854.0	1845.0	1864.9
172.5°	1883.1	1886.1	1861.6	1851.3	1864.9
175°	1890.7	1894.7	1870.3	1858.3	1867.6
177.5°	1892.1	1894.2	1875.8	1865.3	1881.2
180°	1881.2	1881.2	1881.2	1881.2	1881.2



TEST NUMBER: P1438650  
 CATALOG NUMBER: CB2-055U-030D-930-1D-UNV-STD-W-8

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.45	13.16	13.56	14.26	15.79	11.36	12.06	12.46	13.16	14.69
	3H	14.09	14.72	15.21	15.83	17.37	12.87	13.50	13.99	14.61	16.15
	4H	14.71	15.31	15.84	16.42	17.97	13.44	14.04	14.56	15.15	16.69
	6H	15.10	15.65	16.24	16.77	18.33	13.80	14.35	14.94	15.47	17.02
	8H	15.25	15.77	16.39	16.90	18.45	13.94	14.46	15.07	15.59	17.14
	12H	15.32	15.81	16.46	16.94	18.51	13.99	14.49	15.14	15.61	17.19
4H	2H	12.84	13.44	13.98	14.56	16.10	11.97	12.57	13.11	13.68	15.23
	3H	14.70	15.20	15.84	16.34	17.90	13.69	14.19	14.83	15.33	16.89
	4H	15.44	15.90	16.58	17.03	18.60	14.36	14.82	15.50	15.94	17.52
	6H	15.95	16.34	17.10	17.49	19.06	14.82	15.22	15.97	16.37	17.94
	8H	16.15	16.52	17.30	17.66	19.25	15.01	15.38	16.16	16.52	18.11
	12H	16.25	16.58	17.42	17.74	19.33	15.09	15.42	16.26	16.58	18.17
8H	4H	15.58	15.95	16.73	17.09	18.68	14.62	14.99	15.77	16.13	17.71
	6H	16.22	16.52	17.39	17.71	19.29	15.22	15.52	16.39	16.70	18.29
	8H	16.51	16.77	17.68	17.93	19.54	15.49	15.75	16.67	16.92	18.52
	12H	16.68	16.91	17.85	18.07	19.70	15.63	15.87	16.81	17.03	18.66
12H	4H	15.56	15.89	16.72	17.04	18.63	14.62	14.95	15.78	16.10	17.69
	6H	16.25	16.51	17.42	17.67	19.28	15.28	15.54	16.45	16.71	18.31
	8H	16.56	16.79	17.73	17.95	19.58	15.58	15.81	16.76	16.97	18.61