

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438948

Luminaire Tested: CB2-B-125U-030D-930-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438948
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-B-125U-030D-930-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
2-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16243.5 lumens
Efficiency: N/A
Efficacy: 142.1 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 114.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

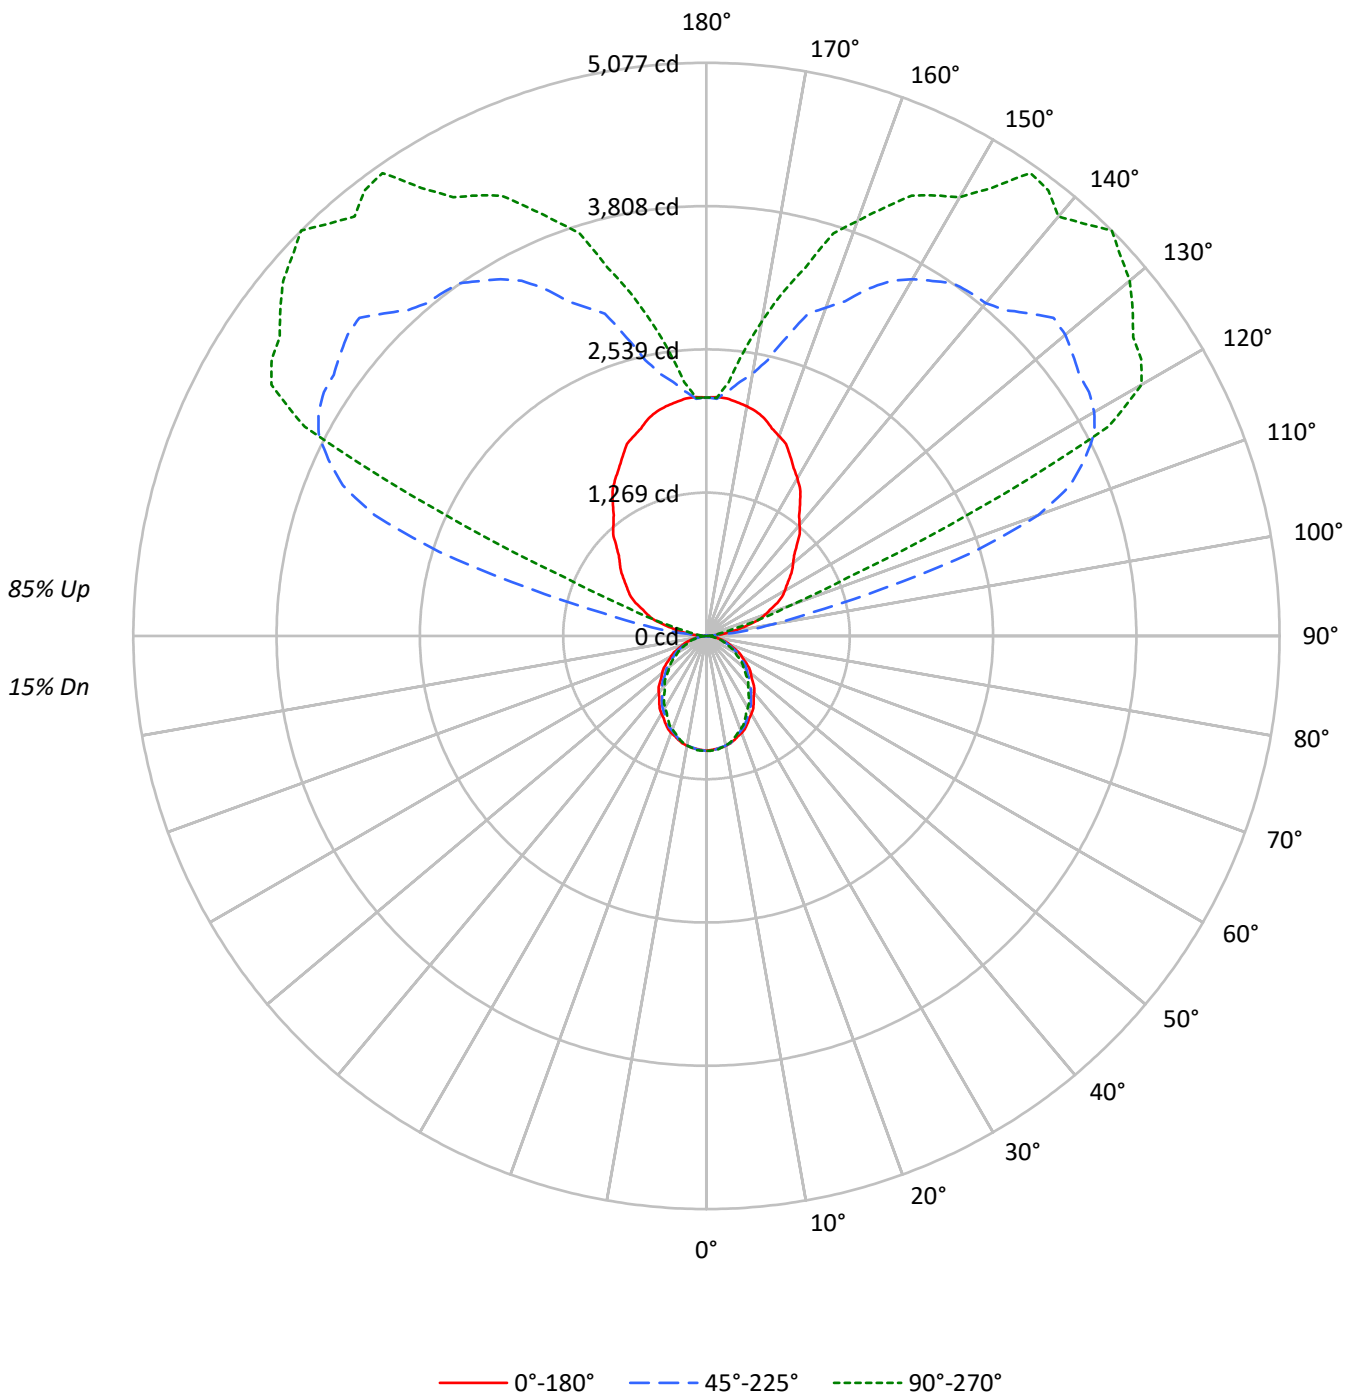



TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									70									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	99	99	99	99	86	86	86	86	64	64	64	43	43	43	24	24	24	15						15													
1	90	86	82	79	79	75	72	70	56	54	52	38	36	35	21	20	20	12						12													
2	82	75	69	64	71	66	61	57	49	46	43	33	31	30	18	18	17	10						10													
3	75	66	59	54	65	58	52	48	43	39	36	29	27	25	16	15	14	9						9													
4	68	58	51	45	59	51	45	40	38	34	31	26	23	21	15	13	12	8						8													
5	62	52	44	38	54	45	39	34	34	30	26	23	21	18	13	12	11	7						7													
6	57	46	38	33	50	41	34	30	30	26	23	21	18	16	12	11	9	6						6													
7	53	41	34	29	46	37	30	26	27	23	20	19	16	14	11	9	8	5						5													
8	49	37	30	25	43	33	27	23	25	21	17	17	14	12	10	9	7	5						5													
9	45	34	27	22	40	30	24	20	23	18	15	16	13	11	9	8	7	4						4													
10	42	31	24	20	37	27	22	18	21	17	14	14	12	10	8	7	6	4						4													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8862	8862	8862
5°	8787	8801	8862
10°	8737	8717	8709
15°	8598	8543	8472
20°	8463	8276	8160
25°	8236	8004	7779
30°	8008	7656	7365
35°	7745	7298	6950
40°	7468	6962	6555
45°	7188	6612	6170
50°	6935	6270	5796
55°	6624	5915	5442
60°	6270	5577	5089
65°	5893	5203	4737
70°	5477	4782	4285
75°	4980	4327	3880
80°	4453	3791	3516
85°	3427	3118	2568

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7188 cd/sqm



TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.7	0.6
10°-20°	266.8	1.6
20°-30°	383.6	2.4
30°-40°	431.1	2.7
40°-50°	416.4	2.6
50°-60°	351.9	2.2
60°-70°	252.7	1.6
70°-80°	138.1	0.9
80°-90°	36.7	0.2
90°-100°	158.2	1.0
100°-110°	979.5	6.0
110°-120°	2470.1	15.2
120°-130°	2969.3	18.3
130°-140°	2692.2	16.6
140°-150°	2146.8	13.2
150°-160°	1464.4	9.0
160°-170°	774.5	4.8
170°-180°	215.6	1.3
0°-30°	746.0	4.6
0°-40°	1177.1	7.2
0°-60°	1945.4	12.0
0°-90°	2373.0	14.6
90°-120°	3607.8	22.2
90°-150°	11416.1	70.3
90°-180°	13871.0	85.4
0°-180°	16243.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1018	1018	1018	1018	1018	
5°	1005	1019	1007	1007	1014	95
15°	954	962	948	938	940	269
25°	857	858	833	814	810	395
35°	728	720	686	660	654	455
45°	584	571	537	509	501	451
55°	436	420	390	365	358	390
65°	286	275	252	234	230	284
75°	148	139	129	118	115	158
85°	34	32	31	27	26	41
90°	0	0	0	0	0	4
95°	82	206	64	46	46	104
105°	400	1121	1620	406	273	421
115°	692	1528	3694	3439	2620	678
125°	901	1853	4031	4586	4613	806
135°	1128	2054	4040	4730	5077	877
145°	1447	2158	3812	4595	5004	905
155°	1756	2201	3394	4090	4304	808
165°	1993	2180	2739	3224	3376	559
175°	2111	2138	2175	2212	2256	200
180°	2111	2111	2111	2111	2111	



TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1017.6	1017.6	1017.6	1017.6	1017.6
2.5°	1010.8	1023.0	1013.9	1015.2	1017.0
5°	1005.2	1018.9	1006.7	1006.9	1013.7
7.5°	998.0	1010.9	995.6	992.8	999.2
10°	988.0	1001.0	985.7	980.3	984.9
12.5°	974.9	987.3	972.6	964.1	968.1
15°	953.7	962.1	947.5	938.2	939.7
17.5°	930.7	935.8	914.8	906.9	905.4
20°	913.2	917.8	893.0	882.0	880.5
22.5°	890.8	894.7	868.6	855.2	853.1
25°	857.1	857.9	833.0	814.1	809.6
27.5°	821.9	819.5	791.8	769.5	763.6
30°	796.3	793.3	761.3	737.8	732.4
32.5°	768.9	763.4	731.3	706.0	700.6
35°	728.5	720.2	686.5	659.8	653.7
37.5°	685.5	676.1	643.0	614.0	607.1
40°	656.9	646.2	612.4	583.5	576.6
42.5°	628.2	616.3	581.9	552.9	545.4
45°	583.6	571.4	536.9	508.6	501.0
47.5°	541.2	525.7	492.1	464.1	456.4
50°	511.9	495.2	462.8	435.4	427.8
52.5°	482.0	464.6	433.5	407.3	399.7
55°	436.3	420.3	389.6	365.3	358.4
57.5°	391.2	375.8	347.7	324.5	317.8
60°	360.0	347.0	320.2	298.3	292.2
62.5°	330.1	318.3	292.8	272.7	266.6
65°	286.0	275.3	252.5	234.4	229.9
67.5°	243.1	232.4	214.0	197.8	192.6
70°	215.1	204.4	187.8	172.9	168.3
72.5°	188.3	177.0	163.5	149.8	146.5
75°	148.0	138.9	128.6	118.4	115.3
77.5°	112.5	103.7	96.2	89.0	88.2
80°	88.8	81.2	75.6	70.9	70.1
82.5°	66.4	60.6	56.9	53.4	53.3
85°	34.3	32.0	31.2	27.2	25.7
87.5°	10.0	10.0	8.7	7.5	7.5
90°	0.0	0.0	0.0	0.0	0.0
92.5°	21.8	36.1	14.6	14.6	14.6
95°	81.9	206.4	63.7	45.5	45.5
97.5°	171.1	494.9	343.9	92.5	80.1
100°	236.6	717.0	591.4	135.9	109.2
102.5°	302.1	910.6	933.5	215.5	167.4
105°	400.4	1121.0	1619.6	406.4	273.0
107.5°	496.8	1258.4	2482.2	838.6	505.9
110°	555.0	1337.9	3130.0	1307.4	782.5



TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	613.3	1417.5	3486.7	2095.8	1350.3
115°	691.5	1527.8	3694.2	3439.0	2620.5
117.5°	757.0	1628.9	3872.5	4252.8	4012.6
120°	800.7	1708.2	3967.1	4369.3	4449.4
122.5°	844.4	1766.1	4018.1	4414.6	4565.8
125°	900.8	1852.7	4030.8	4586.5	4613.1
127.5°	957.2	1918.0	4090.9	4744.4	4756.9
130°	1000.9	1961.7	4149.1	4797.3	4895.2
132.5°	1051.8	1998.4	4170.9	4827.6	4975.3
135°	1128.3	2053.5	4039.9	4730.2	5077.2
137.5°	1224.7	2093.0	3914.3	4727.4	4951.6
140°	1282.9	2101.4	3848.8	4831.9	4849.7
142.5°	1348.5	2124.2	3834.3	4820.4	4973.5
145°	1446.7	2158.5	3812.4	4595.1	5004.4
147.5°	1545.0	2180.2	3728.7	4346.5	4704.1
150°	1610.5	2188.8	3648.7	4263.3	4485.8
152.5°	1676.0	2197.4	3546.8	4211.6	4398.4
155°	1756.1	2200.9	3393.9	4090.3	4303.8
157.5°	1839.8	2190.3	3210.1	3868.7	4101.8
160°	1883.5	2177.1	3093.6	3707.9	3912.5
162.5°	1927.1	2170.9	2991.7	3497.6	3737.8
165°	1992.7	2179.5	2738.8	3224.4	3375.7
167.5°	2036.3	2171.6	2502.2	2900.1	3113.6
170°	2065.5	2172.2	2356.6	2651.8	2829.8
172.5°	2087.3	2137.1	2269.3	2424.9	2545.9
175°	2110.9	2137.6	2174.6	2212.0	2256.5
177.5°	2118.2	2132.5	2103.7	2096.7	2110.9
180°	2110.9	2110.9	2110.9	2110.9	2110.9

TEST NUMBER: P1438948

CATALOG NUMBER: CB2-B-125U-030D-930-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.56	10.17	10.77	11.36	13.06	8.46	9.07	9.67	10.26	11.96
	3H	11.18	11.73	12.40	12.93	14.64	9.97	10.51	11.19	11.71	13.42
	4H	11.80	12.32	13.03	13.51	15.23	10.53	11.05	11.75	12.24	13.96
	6H	12.19	12.67	13.42	13.86	15.59	10.89	11.36	12.12	12.56	14.29
	8H	12.33	12.78	13.56	13.99	15.71	11.02	11.47	12.25	12.68	14.40
	12H	12.40	12.83	13.63	14.03	15.77	11.07	11.50	12.31	12.71	14.45
4H	2H	9.94	10.46	11.17	11.65	13.37	9.06	9.58	10.30	10.78	12.49
	3H	11.78	12.22	13.02	13.43	15.16	10.77	11.21	12.01	12.43	14.15
	4H	12.52	12.92	13.75	14.12	15.87	11.44	11.84	12.67	13.04	14.79
	6H	13.02	13.36	14.26	14.59	16.33	11.90	12.24	13.14	13.47	15.20
	8H	13.22	13.54	14.46	14.76	16.51	12.08	12.40	13.32	13.62	15.37
	12H	13.32	13.61	14.57	14.83	16.59	12.16	12.45	13.41	13.68	15.43
8H	4H	12.65	12.97	13.89	14.19	15.94	11.69	12.01	12.93	13.23	14.98
	6H	13.29	13.55	14.54	14.81	16.56	12.28	12.55	13.54	13.81	15.56
	8H	13.57	13.80	14.83	15.04	16.81	12.56	12.78	13.81	14.02	15.79
	12H	13.74	13.94	15.00	15.17	16.97	12.70	12.89	13.96	14.13	15.92
12H	4H	12.62	12.91	13.87	14.14	15.89	11.68	11.97	12.93	13.20	14.95
	6H	13.31	13.54	14.57	14.78	16.54	12.35	12.57	13.60	13.81	15.58
	8H	13.62	13.82	14.88	15.05	16.85	12.64	12.84	13.90	14.07	15.87