

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439019

Luminaire Tested: CB2-D-055U-055D-930-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1439019  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB2-D-055U-055D-930-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT  
2-INCH APERTURE  
DOWNLIGHT 550 LUMENS PER FOOT  
UPLIGHT 550 LUMENS PER FOOT  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4553.0 lumens  
Efficiency: N/A  
Efficacy: 131.6 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 34.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1439019

CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

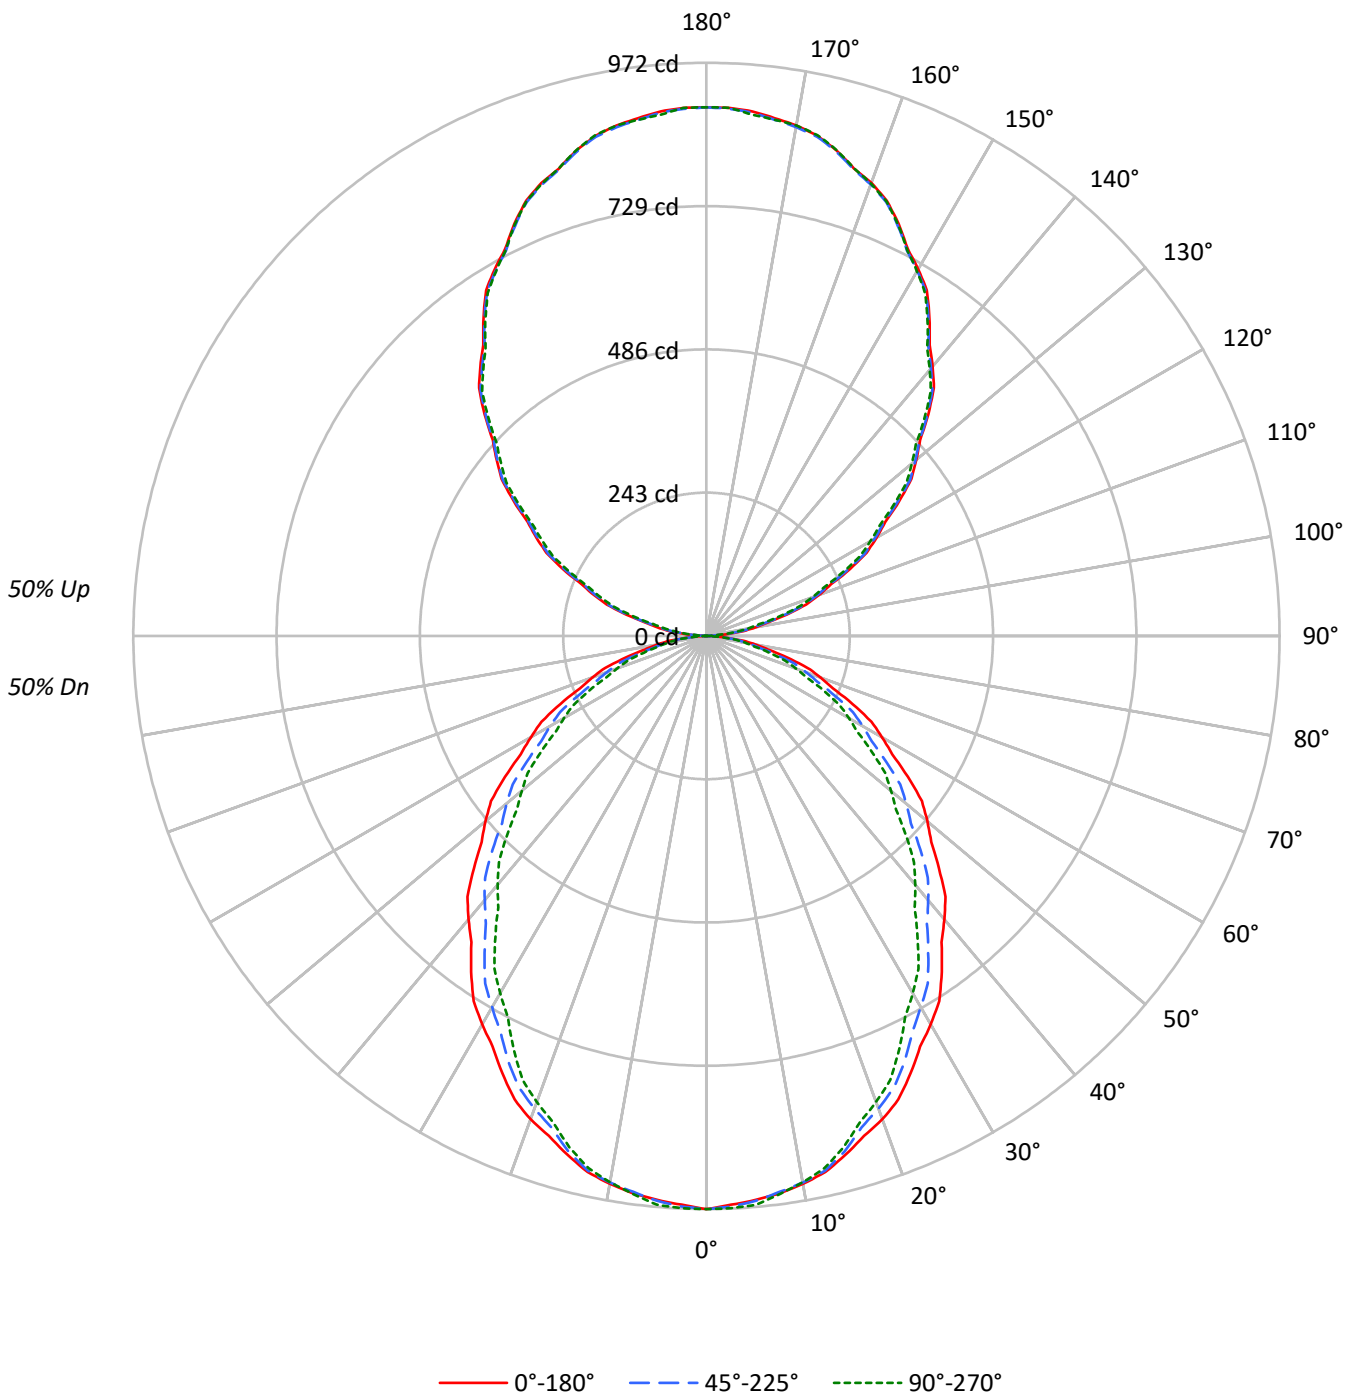



TEST NUMBER: P1439019

CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50																				
1	98	94	90	86	90	87	83	80	73	71	69	61	59	58	50	49	48	42																				
2	89	82	76	71	82	76	71	66	64	60	57	54	51	49	44	42	40	36																				
3	82	72	65	59	75	67	61	56	57	52	48	48	44	41	39	37	35	30																				
4	75	64	56	50	69	59	53	47	51	45	41	43	39	36	35	32	30	26																				
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	32	29	26	23																				
6	63	51	43	38	58	48	41	35	41	35	31	35	30	27	29	26	23	20																				
7	59	46	39	33	54	43	36	31	37	32	28	32	27	24	26	23	21	18																				
8	54	42	35	29	50	39	32	28	34	29	25	29	25	22	24	21	19	16																				
9	51	39	31	26	47	36	29	25	31	26	22	27	22	19	22	19	17	15																				
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	13																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	16930	16930	16930
5°	16786	16812	16930
10°	16690	16651	16639
15°	16427	16319	16185
20°	16168	15809	15588
25°	15734	15290	14861
30°	15297	14623	14070
35°	14797	13942	13276
40°	14265	13301	12523
45°	13732	12631	11789
50°	13250	11979	11072
55°	12657	11299	10397
60°	11980	10656	9722
65°	11255	9936	9050
70°	10460	9136	8189
75°	9516	8264	7416
80°	8506	7242	6720
85°	6535	5955	4916

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13732 cd/sqm



TEST NUMBER: P1439019

CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.4	2.0
10°-20°	254.8	5.6
20°-30°	366.4	8.0
30°-40°	411.8	9.0
40°-50°	397.8	8.7
50°-60°	336.1	7.4
60°-70°	241.4	5.3
70°-80°	131.9	2.9
80°-90°	35.1	0.8
90°-100°	34.7	0.8
100°-110°	142.8	3.1
110°-120°	259.3	5.7
120°-130°	352.8	7.7
130°-140°	407.3	8.9
140°-150°	410.5	9.0
150°-160°	354.2	7.8
160°-170°	240.1	5.3
170°-180°	84.7	1.9
0°-30°	712.6	15.7
0°-40°	1124.4	24.7
0°-60°	1858.2	40.8
0°-90°	2266.7	49.8
90°-120°	436.8	9.6
90°-150°	1607.4	35.3
90°-180°	2286.0	50.2
0°-180°	4553.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	972	972	972	972	972	
5°	960	973	962	962	968	91
15°	911	919	905	896	898	257
25°	819	819	796	778	773	377
35°	696	688	656	630	624	435
45°	558	546	513	486	479	431
55°	417	402	372	349	342	373
65°	273	263	241	224	220	271
75°	141	133	123	113	110	151
85°	33	31	30	26	25	39
90°	0	0	1	0	1	2
95°	34	30	28	22	22	39
105°	141	139	136	128	127	150
115°	268	268	263	255	254	265
125°	399	403	395	387	387	357
135°	532	538	529	520	523	410
145°	659	667	657	649	654	412
155°	771	779	768	763	769	355
165°	852	861	850	846	853	240
175°	893	903	891	885	887	85
180°	896	896	896	896	896	

TEST NUMBER: P1439019

CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	972.0	972.0	972.0	972.0	972.0
2.5°	965.5	977.1	968.4	969.7	971.4
5°	960.1	973.2	961.6	961.7	968.3
7.5°	953.3	965.6	951.0	948.3	954.4
10°	943.7	956.1	941.5	936.4	940.8
12.5°	931.2	943.0	929.0	920.9	924.7
15°	911.0	919.0	905.0	896.1	897.6
17.5°	889.0	893.9	873.8	866.3	864.8
20°	872.3	876.6	852.9	842.5	841.0
22.5°	850.8	854.6	829.7	816.9	814.8
25°	818.7	819.4	795.6	777.7	773.3
27.5°	785.1	782.7	756.3	735.1	729.4
30°	760.6	757.7	727.1	704.7	699.6
32.5°	734.4	729.2	698.6	674.3	669.2
35°	695.9	687.9	655.7	630.3	624.4
37.5°	654.8	645.8	614.2	586.5	579.9
40°	627.4	617.2	585.0	557.3	550.8
42.5°	600.0	588.7	555.8	528.1	521.0
45°	557.5	545.8	512.8	485.8	478.6
47.5°	517.0	502.1	470.1	443.3	436.0
50°	489.0	473.0	442.1	415.9	408.6
52.5°	460.4	443.8	414.1	389.1	381.8
55°	416.8	401.5	372.1	348.9	342.4
57.5°	373.6	358.9	332.1	309.9	303.5
60°	343.9	331.5	305.9	284.9	279.1
62.5°	315.3	304.1	279.7	260.5	254.7
65°	273.1	263.0	241.1	223.9	219.6
67.5°	232.2	222.0	204.4	188.9	184.0
70°	205.4	195.2	179.4	165.1	160.8
72.5°	179.8	169.0	156.1	143.1	139.9
75°	141.4	132.7	122.8	113.1	110.2
77.5°	107.5	99.0	91.8	85.0	84.3
80°	84.8	77.6	72.2	67.7	67.0
82.5°	63.4	57.9	54.3	51.1	50.9
85°	32.7	30.6	29.8	26.0	24.6
87.5°	9.5	9.5	8.5	7.1	7.3
90°	0.0	0.0	0.7	0.0	0.7
92.5°	8.4	7.3	6.9	4.5	5.2
95°	33.6	29.5	28.0	21.7	21.7
97.5°	63.4	59.3	57.1	50.6	49.2
100°	84.6	80.5	78.3	71.3	69.9
102.5°	106.4	104.5	100.7	93.1	91.7
105°	141.3	139.2	135.7	127.9	126.6
107.5°	177.1	177.5	172.2	165.8	163.9
110°	202.8	202.1	197.9	191.6	190.2



TEST NUMBER: P1439019

CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	229.1	227.9	223.6	217.3	215.9
115°	268.5	267.8	262.9	255.2	254.5
117.5°	306.0	308.2	302.4	294.3	294.0
120°	332.9	335.6	328.7	321.6	320.3
122.5°	359.2	362.4	355.5	347.4	347.7
125°	399.3	403.4	395.1	386.7	387.4
127.5°	438.0	443.1	435.4	426.9	427.7
130°	464.3	470.5	462.2	453.2	454.5
132.5°	491.2	497.3	489.1	479.5	482.0
135°	532.2	538.3	529.4	519.7	523.1
137.5°	570.8	576.9	567.1	559.0	563.1
140°	596.5	602.6	592.3	584.7	588.8
142.5°	621.7	628.9	618.0	609.9	615.1
145°	659.4	667.0	656.6	649.1	653.8
147.5°	695.2	702.8	692.3	685.0	689.9
150°	718.2	725.7	714.7	708.5	714.0
152.5°	739.4	748.0	736.5	730.4	737.5
155°	771.3	778.8	767.8	763.1	769.2
157.5°	799.0	807.8	796.8	792.7	797.6
160°	817.5	825.7	814.7	810.6	816.1
162.5°	831.5	840.2	829.8	825.2	831.7
165°	852.4	861.3	850.3	845.6	853.1
167.5°	868.9	878.4	867.3	862.4	870.1
170°	879.0	887.9	876.2	870.8	879.0
172.5°	885.7	895.2	882.9	877.5	882.9
175°	893.0	902.6	890.9	885.3	887.4
177.5°	896.5	904.1	894.8	889.9	896.5
180°	896.5	896.5	896.5	896.5	896.5



TEST NUMBER: P1439019  
 CATALOG NUMBER: CB2-D-055U-055D-930-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.81	17.66	17.77	18.63	19.91	15.71	16.56	16.67	17.53	18.81
	3H	18.45	19.21	19.43	20.20	21.49	17.24	18.00	18.21	18.98	20.28
	4H	19.08	19.80	20.07	20.79	22.09	17.81	18.53	18.80	19.52	20.82
	6H	19.48	20.15	20.48	21.14	22.46	18.18	18.84	19.18	19.84	21.15
	8H	19.63	20.26	20.63	21.27	22.59	18.32	18.95	19.32	19.96	21.28
	12H	19.70	20.30	20.71	21.31	22.65	18.38	18.98	19.39	19.99	21.33
4H	2H	17.22	17.94	18.21	18.92	20.23	16.34	17.06	17.33	18.05	19.35
	3H	19.09	19.68	20.09	20.70	22.02	18.08	18.68	19.08	19.69	21.01
	4H	19.83	20.38	20.84	21.39	22.73	18.75	19.30	19.76	20.31	21.65
	6H	20.35	20.82	21.37	21.85	23.19	19.22	19.70	20.25	20.73	22.07
	8H	20.55	20.99	21.58	22.02	23.38	19.41	19.85	20.44	20.88	22.24
	12H	20.66	21.06	21.70	22.10	23.46	19.50	19.90	20.54	20.94	22.30
8H	4H	19.99	20.43	21.01	21.45	22.81	19.02	19.46	20.04	20.49	21.84
	6H	20.63	20.99	21.67	22.06	23.41	19.63	19.99	20.67	21.06	22.41
	8H	20.92	21.24	21.97	22.29	23.66	19.90	20.22	20.96	21.27	22.65
	12H	21.09	21.37	22.15	22.42	23.84	20.05	20.33	21.11	21.38	22.79
12H	4H	19.97	20.36	21.01	21.40	22.76	19.03	19.42	20.07	20.46	21.82
	6H	20.66	20.98	21.71	22.03	23.40	19.69	20.01	20.74	21.06	22.43
	8H	20.97	21.25	22.03	22.30	23.72	19.99	20.28	21.05	21.32	22.74