

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439067

Luminaire Tested: CB2-D-085U-120D-930-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439067
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-085U-120D-930-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 1200 LUMENS PER FOOT
UPLIGHT 850 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8375.1 lumens
Efficiency: N/A
Efficacy: 123.5 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 67.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439067

CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

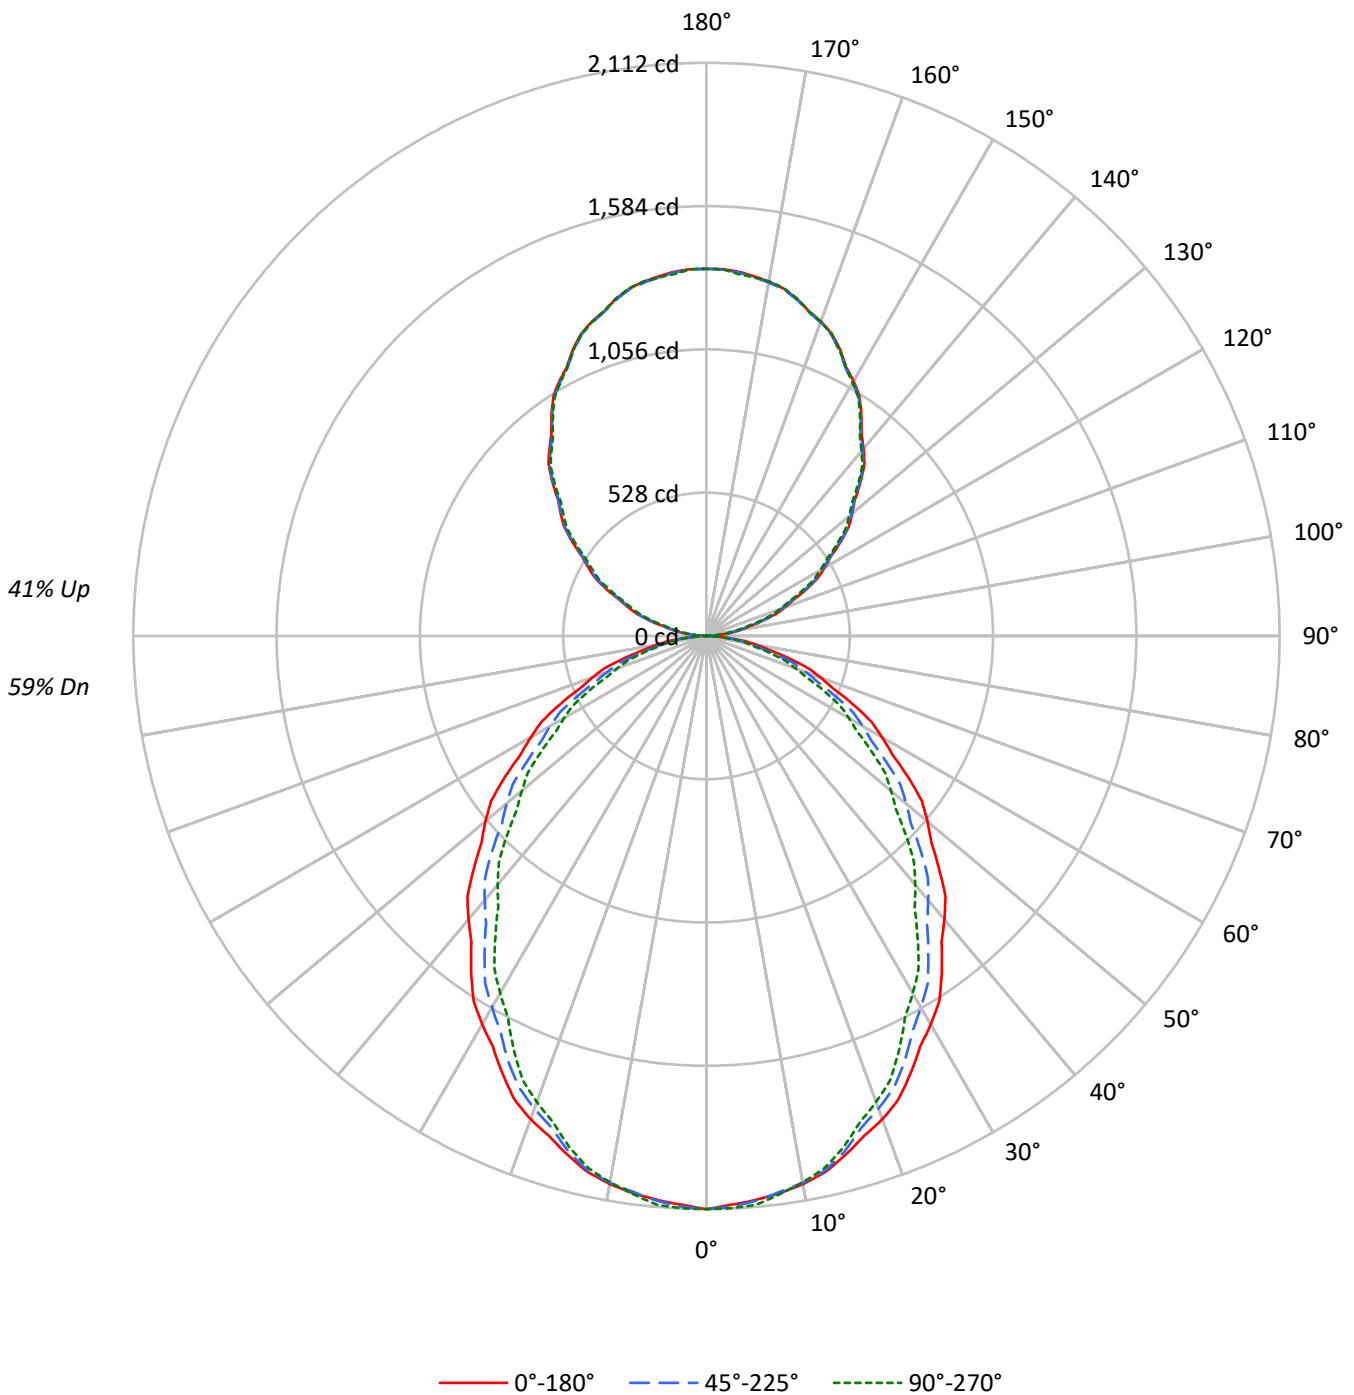



TEST NUMBER: P1439067

CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59																												
1	100	96	92	88	93	89	86	83	78	75	73	67	65	64	57	56	55	50																												
2	91	84	78	73	85	78	73	69	68	64	61	59	56	53	51	48	46	42																												
3	83	74	67	61	78	69	63	58	61	56	51	52	49	45	45	42	40	36																												
4	76	66	58	52	71	62	54	49	54	48	44	47	43	39	40	37	34	31																												
5	70	59	50	44	65	55	48	42	48	43	38	42	38	34	36	33	30	27																												
6	65	53	45	39	60	50	42	37	44	38	33	38	34	30	33	30	27	24																												
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	30	27	24	21																												
8	56	43	36	30	52	41	34	29	36	31	26	32	27	24	28	24	21	19																												
9	52	40	32	27	49	38	31	26	33	28	24	30	25	22	26	22	19	17																												
10	49	37	29	24	46	35	28	23	31	25	22	27	23	20	24	20	18	16																												

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	36787	36787	36787
5°	36475	36531	36786
10°	36267	36182	36152
15°	35694	35459	35167
20°	35132	34351	33871
25°	34187	33224	32292
30°	33241	31777	30574
35°	32151	30295	28849
40°	30997	28901	27209
45°	29837	27447	25615
50°	28790	26029	24056
55°	27500	24554	22589
60°	26025	23155	21127
65°	24460	21596	19663
70°	22728	19845	17788
75°	20680	17954	16104
80°	18496	15737	14594
85°	14229	12930	10672

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 29837 cd/sqm



TEST NUMBER: P1439067

CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.6	2.4
10°-20°	553.7	6.6
20°-30°	796.1	9.5
30°-40°	894.8	10.7
40°-50°	864.3	10.3
50°-60°	730.3	8.7
60°-70°	524.6	6.3
70°-80°	286.7	3.4
80°-90°	76.2	0.9
90°-100°	52.3	0.6
100°-110°	215.5	2.6
110°-120°	391.3	4.7
120°-130°	532.4	6.4
130°-140°	614.6	7.3
140°-150°	619.4	7.4
150°-160°	534.5	6.4
160°-170°	362.2	4.3
170°-180°	127.8	1.5
0°-30°	1548.3	18.5
0°-40°	2443.1	29.2
0°-60°	4037.7	48.2
0°-90°	4925.2	58.8
90°-120°	659.0	7.9
90°-150°	2425.4	29.0
90°-180°	3450.0	41.2
0°-180°	8375.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2112	2112	2112	2112	2112	
5°	2086	2115	2089	2090	2104	198
15°	1980	1997	1966	1947	1950	558
25°	1779	1780	1729	1690	1680	819
35°	1512	1495	1425	1370	1357	945
45°	1211	1186	1114	1056	1040	936
55°	906	872	809	758	744	810
65°	594	571	524	487	477	589
75°	307	288	267	246	239	329
85°	71	66	65	56	53	85
90°	0	0	1	0	1	5
95°	51	44	42	33	33	59
105°	213	210	205	193	191	226
115°	405	404	397	385	384	400
125°	602	609	596	584	585	538
135°	803	812	799	784	789	618
145°	995	1006	991	979	987	622
155°	1164	1175	1159	1151	1161	535
165°	1286	1300	1283	1276	1287	362
175°	1348	1362	1344	1336	1339	128
180°	1353	1353	1353	1353	1353	

TEST NUMBER: P1439067

CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2112.1	2112.1	2112.1	2112.1	2112.1
2.5°	2097.8	2123.1	2104.3	2107.0	2110.8
5°	2086.2	2114.7	2089.4	2089.7	2104.0
7.5°	2071.3	2098.2	2066.5	2060.6	2073.9
10°	2050.6	2077.5	2045.8	2034.7	2044.1
12.5°	2023.4	2049.1	2018.6	2001.0	2009.2
15°	1979.5	1996.8	1966.5	1947.2	1950.3
17.5°	1931.6	1942.3	1898.6	1882.4	1879.2
20°	1895.4	1904.8	1853.3	1830.6	1827.4
22.5°	1848.8	1857.0	1802.9	1774.9	1770.5
25°	1778.9	1780.5	1728.8	1689.8	1680.3
27.5°	1705.8	1700.8	1643.4	1597.2	1584.9
30°	1652.8	1646.5	1580.0	1531.2	1520.2
32.5°	1595.9	1584.5	1517.9	1465.3	1454.2
35°	1512.1	1494.7	1424.8	1369.5	1356.8
37.5°	1422.8	1403.2	1334.5	1274.4	1260.1
40°	1363.3	1341.2	1271.1	1211.0	1196.7
42.5°	1303.8	1279.1	1207.7	1147.5	1132.0
45°	1211.3	1186.0	1114.3	1055.7	1039.9
47.5°	1123.3	1091.1	1021.4	963.2	947.4
50°	1062.5	1027.7	960.6	903.7	887.8
52.5°	1000.4	964.3	899.8	845.4	829.6
55°	905.6	872.4	808.6	758.1	743.9
57.5°	811.8	779.9	721.6	673.4	659.5
60°	747.1	720.3	664.7	619.1	606.5
62.5°	685.0	660.7	607.7	566.1	553.4
65°	593.5	571.4	524.0	486.6	477.1
67.5°	504.6	482.4	444.1	410.5	399.8
70°	446.3	424.2	389.7	358.8	349.3
72.5°	390.7	367.3	339.3	311.0	304.0
75°	307.3	288.3	266.8	245.7	239.3
77.5°	233.5	215.2	199.6	184.6	183.1
80°	184.4	168.5	156.9	147.1	145.5
82.5°	137.8	125.8	118.1	110.9	110.6
85°	71.2	66.4	64.7	56.5	53.4
87.5°	20.7	20.7	18.3	15.5	15.7
90°	0.0	0.0	1.1	0.0	1.1
92.5°	12.7	11.0	10.3	6.8	7.8
95°	50.6	44.5	42.2	32.7	32.7
97.5°	95.6	89.4	86.1	76.3	74.3
100°	127.7	121.5	118.2	107.6	105.5
102.5°	160.6	157.7	151.9	140.5	138.4
105°	213.1	210.1	204.7	193.1	191.0
107.5°	267.2	267.8	259.8	250.2	247.3
110°	306.0	305.0	298.6	289.1	287.0



TEST NUMBER: P1439067

CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	345.7	343.8	337.4	327.9	325.8
115°	405.2	404.2	396.7	385.1	384.1
117.5°	461.7	465.1	456.3	444.0	443.6
120°	502.3	506.4	495.9	485.3	483.3
122.5°	541.9	546.9	536.5	524.2	524.6
125°	602.5	608.7	596.2	583.5	584.6
127.5°	661.0	668.6	657.0	644.1	645.4
130°	700.6	709.9	697.5	683.8	685.9
132.5°	741.2	750.4	738.0	723.5	727.2
135°	803.0	812.3	798.8	784.1	789.3
137.5°	861.2	870.5	855.8	843.4	849.6
140°	900.1	909.4	893.7	882.3	888.5
142.5°	938.1	949.0	932.6	920.3	928.1
145°	995.0	1006.4	990.8	979.4	986.6
147.5°	1049.1	1060.4	1044.6	1033.6	1041.0
150°	1083.7	1095.0	1078.4	1069.1	1077.3
152.5°	1115.8	1128.8	1111.3	1102.1	1112.8
155°	1163.9	1175.2	1158.6	1151.4	1160.7
157.5°	1205.7	1218.9	1202.3	1196.1	1203.5
160°	1233.5	1245.9	1229.3	1223.1	1231.4
162.5°	1254.6	1267.8	1252.1	1245.1	1255.0
165°	1286.3	1299.7	1283.1	1276.0	1287.3
167.5°	1311.2	1325.4	1308.6	1301.3	1312.9
170°	1326.4	1339.8	1322.1	1314.0	1326.4
172.5°	1336.5	1350.7	1332.3	1324.0	1332.3
175°	1347.5	1361.9	1344.3	1335.9	1339.0
177.5°	1352.7	1364.3	1350.2	1342.8	1352.7
180°	1352.7	1352.7	1352.7	1352.7	1352.7



TEST NUMBER: P1439067
 CATALOG NUMBER: CB2-D-085U-120D-930-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.30	21.24	21.18	22.14	23.28	19.20	20.14	20.08	21.04	22.18
	3H	21.95	22.79	22.85	23.70	24.87	20.74	21.57	21.63	22.48	23.65
	4H	22.59	23.38	23.49	24.29	25.47	21.31	22.10	22.22	23.02	24.19
	6H	22.99	23.72	23.91	24.64	25.83	21.69	22.42	22.61	23.34	24.53
	8H	23.14	23.84	24.07	24.77	25.96	21.83	22.52	22.76	23.46	24.65
	12H	23.22	23.88	24.15	24.81	26.02	21.90	22.56	22.83	23.49	24.70
4H	2H	20.72	21.51	21.64	22.43	23.60	19.85	20.64	20.76	21.55	22.73
	3H	22.60	23.26	23.52	24.20	25.39	21.59	22.25	22.51	23.19	24.38
	4H	23.35	23.95	24.28	24.89	26.10	22.27	22.87	23.20	23.81	25.02
	6H	23.87	24.39	24.82	25.35	26.57	22.74	23.26	23.69	24.23	25.44
	8H	24.08	24.56	25.03	25.52	26.75	22.94	23.42	23.89	24.38	25.61
	12H	24.19	24.62	25.16	25.60	26.83	23.03	23.46	24.00	24.44	25.67
8H	4H	23.51	23.99	24.46	24.95	26.18	22.54	23.03	23.49	23.99	25.22
	6H	24.15	24.55	25.13	25.55	26.78	23.15	23.55	24.13	24.55	25.78
	8H	24.44	24.80	25.43	25.79	27.03	23.43	23.78	24.41	24.77	26.02
	12H	24.62	24.93	25.61	25.92	27.21	23.58	23.89	24.57	24.87	26.17
12H	4H	23.49	23.93	24.46	24.90	26.14	22.55	22.99	23.52	23.96	25.20
	6H	24.18	24.54	25.17	25.53	26.77	23.21	23.57	24.20	24.56	25.80
	8H	24.50	24.81	25.49	25.80	27.09	23.52	23.84	24.51	24.82	26.11