

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438587

Luminaire Tested: CB2-030U-030D-835-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1438587  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB2-030U-030D-835-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT  
2-INCH APERTURE  
DOWNLIGHT 300 LUMENS PER FOOT  
UPLIGHT 300 LUMENS PER FOOT  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2509.9 lumens  
Efficiency: N/A  
Efficacy: 140.2 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 17.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1438587

CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

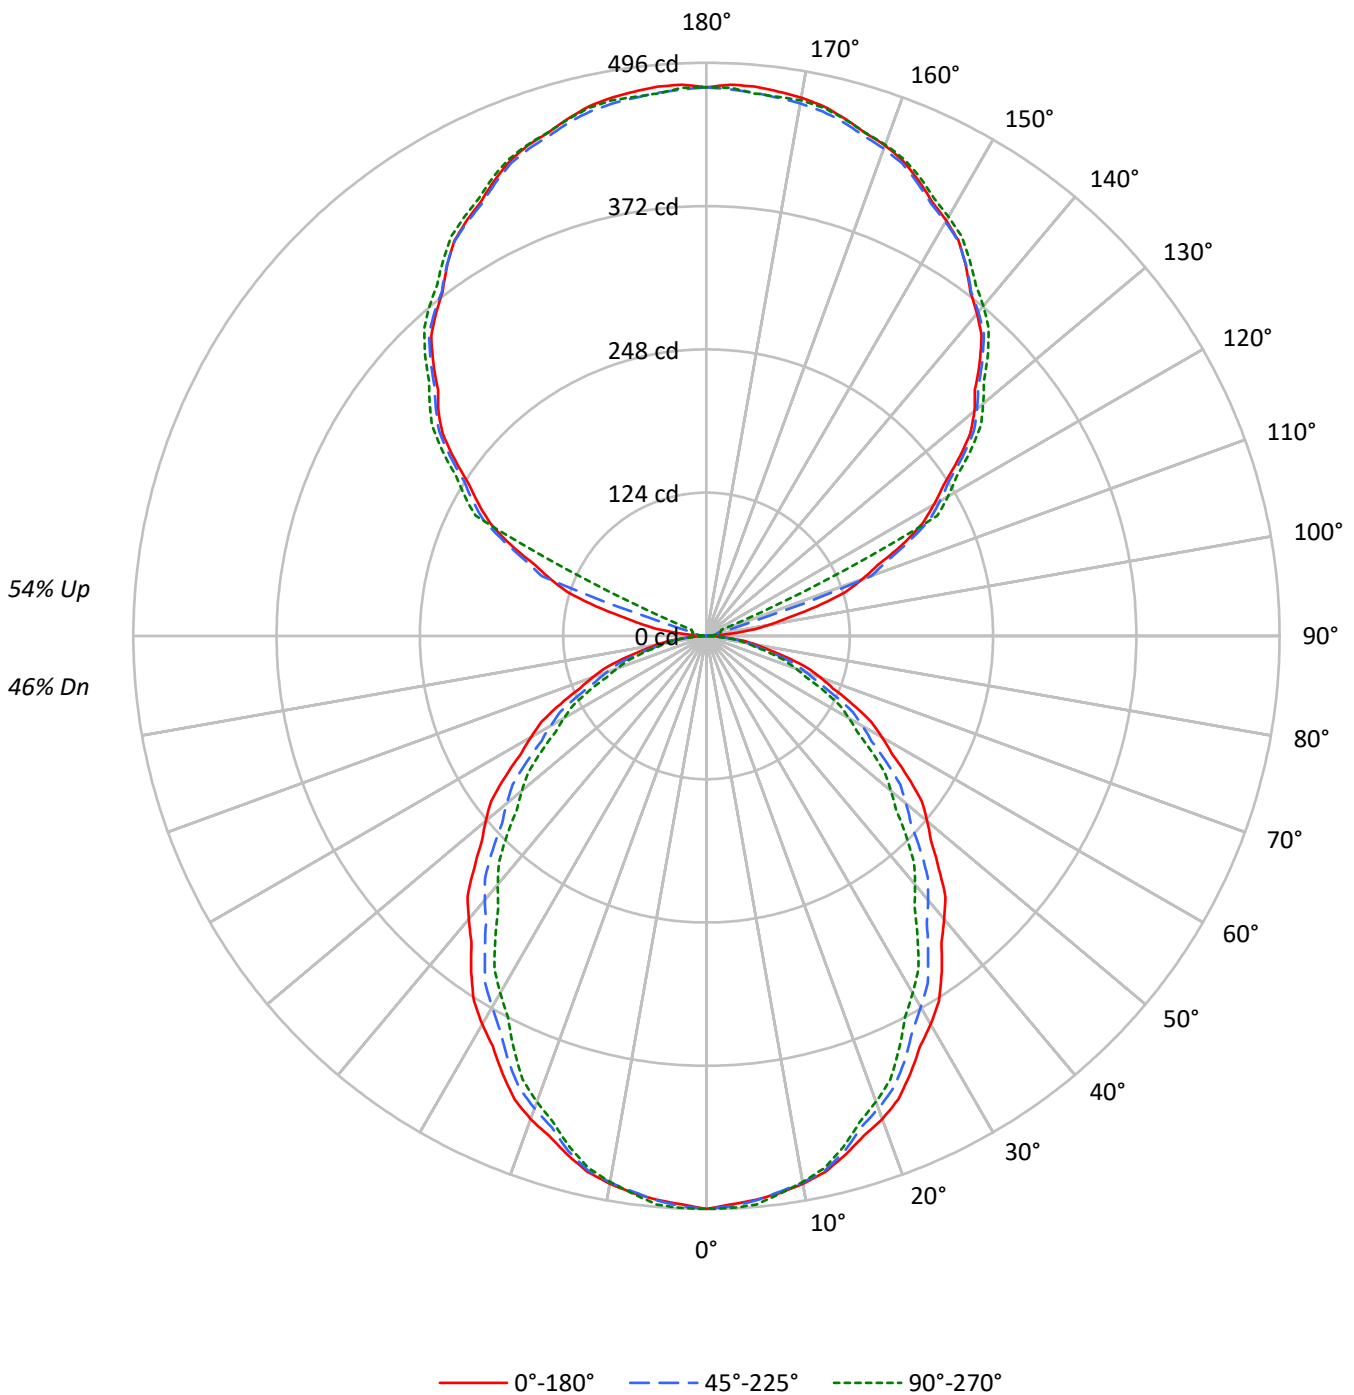



TEST NUMBER: P1438587

CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	53	53	53	46
1	97	93	89	86	89	85	82	79	71	69	67	59	57	55	47	46	45	39
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28
4	74	63	56	50	68	59	52	46	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	26	21	19	21	18	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8636	8636	8636
5°	8562	8576	8635
10°	8514	8493	8486
15°	8379	8323	8255
20°	8246	8065	7952
25°	8025	7799	7580
30°	7803	7459	7176
35°	7546	7110	6772
40°	7276	6785	6387
45°	7003	6444	6013
50°	6758	6110	5647
55°	6456	5764	5302
60°	6110	5434	4960
65°	5741	5069	4616
70°	5337	4660	4176
75°	4852	4213	3782
80°	4343	3691	3430
85°	3337	3038	2498

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7003 cd/sqm



TEST NUMBER: P1438587

CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.6	1.9
10°-20°	130.0	5.2
20°-30°	186.9	7.4
30°-40°	210.0	8.4
40°-50°	202.9	8.1
50°-60°	171.4	6.8
60°-70°	123.1	4.9
70°-80°	67.3	2.7
80°-90°	17.9	0.7
90°-100°	8.3	0.3
100°-110°	52.7	2.1
110°-120°	167.3	6.7
120°-130°	242.8	9.7
130°-140°	261.1	10.4
140°-150°	245.9	9.8
150°-160°	200.3	8.0
160°-170°	130.4	5.2
170°-180°	45.1	1.8
0°-30°	363.5	14.5
0°-40°	573.5	22.8
0°-60°	947.8	37.8
0°-90°	1156.1	46.1
90°-120°	228.2	9.1
90°-150°	978.0	39.0
90°-180°	1354.0	53.9
0°-180°	2509.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	496	496	496	496	496	
5°	490	496	490	491	494	46
15°	465	469	462	457	458	131
25°	418	418	406	397	394	192
35°	355	351	334	322	318	222
45°	284	278	262	248	244	220
55°	213	205	190	178	175	190
65°	139	134	123	114	112	138
75°	72	68	63	58	56	77
85°	17	16	15	13	12	20
90°	0	0	0	0	0	1
95°	19	6	6	4	3	24
105°	99	103	10	12	13	104
115°	187	191	193	195	112	184
125°	266	270	270	275	279	238
135°	334	338	338	340	344	258
145°	391	394	392	392	397	245
155°	435	437	432	432	438	200
165°	463	465	460	458	463	131
175°	477	478	472	469	471	45
180°	475	475	475	475	475	

TEST NUMBER: P1438587

CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	495.8	495.8	495.8	495.8	495.8
2.5°	492.4	498.4	494.0	494.6	495.5
5°	489.7	496.4	490.5	490.6	493.9
7.5°	486.2	492.5	485.1	483.7	486.8
10°	481.4	487.7	480.2	477.6	479.8
12.5°	475.0	481.0	473.8	469.7	471.6
15°	464.7	468.7	461.6	457.1	457.8
17.5°	453.4	455.9	445.7	441.9	441.1
20°	444.9	447.1	435.1	429.7	429.0
22.5°	434.0	435.9	423.2	416.7	415.6
25°	417.6	418.0	405.8	396.7	394.4
27.5°	400.4	399.2	385.8	374.9	372.0
30°	388.0	386.5	370.9	359.4	356.8
32.5°	374.6	371.9	356.3	344.0	341.4
35°	354.9	350.9	334.4	321.5	318.5
37.5°	334.0	329.4	313.3	299.1	295.8
40°	320.0	314.8	298.4	284.3	280.9
42.5°	306.1	300.3	283.5	269.4	265.7
45°	284.3	278.4	261.6	247.8	244.1
47.5°	263.7	256.1	239.8	226.1	222.4
50°	249.4	241.2	225.5	212.1	208.4
52.5°	234.8	226.4	211.2	198.5	194.7
55°	212.6	204.8	189.8	178.0	174.6
57.5°	190.6	183.1	169.4	158.1	154.8
60°	175.4	169.1	156.0	145.3	142.4
62.5°	160.8	155.1	142.7	132.9	129.9
65°	139.3	134.1	123.0	114.2	112.0
67.5°	118.4	113.2	104.2	96.4	93.8
70°	104.8	99.6	91.5	84.2	82.0
72.5°	91.7	86.2	79.6	73.0	71.4
75°	72.1	67.7	62.6	57.7	56.2
77.5°	54.8	50.5	46.8	43.3	43.0
80°	43.3	39.6	36.8	34.5	34.2
82.5°	32.3	29.5	27.7	26.0	26.0
85°	16.7	15.6	15.2	13.3	12.5
87.5°	4.9	4.9	4.3	3.7	3.7
90°	0.0	0.0	0.0	0.3	0.3
92.5°	5.2	2.0	1.4	2.0	2.0
95°	18.9	5.5	5.8	3.8	3.4
97.5°	39.2	8.8	8.4	9.3	9.6
100°	54.6	18.0	9.3	10.6	11.0
102.5°	71.6	67.8	9.5	11.5	12.1
105°	98.9	102.6	10.3	12.0	12.7
107.5°	125.6	129.3	47.9	12.4	13.1
110°	143.5	147.2	151.7	12.7	13.4

TEST NUMBER: P1438587

CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	160.2	164.7	168.2	28.3	13.9
115°	187.1	191.1	192.9	195.2	111.9
117.5°	210.8	215.7	217.8	221.6	225.4
120°	227.3	232.0	233.4	237.3	241.3
122.5°	243.5	247.6	248.5	253.0	256.7
125°	265.7	270.4	270.5	275.1	278.7
127.5°	287.9	292.0	291.8	295.2	299.3
130°	302.8	305.5	305.5	308.4	312.7
132.5°	315.1	318.9	319.0	321.3	325.6
135°	334.4	338.4	337.8	340.0	344.3
137.5°	352.4	356.3	355.2	357.1	361.5
140°	364.2	367.6	365.9	367.8	372.8
142.5°	375.2	378.6	376.1	377.7	383.0
145°	391.3	394.4	391.7	392.1	397.2
147.5°	405.7	408.7	405.4	405.9	410.6
150°	415.0	417.7	413.7	414.1	418.8
152.5°	423.3	425.7	421.4	421.3	426.8
155°	434.6	437.3	432.5	431.6	437.7
157.5°	444.9	447.4	442.6	442.0	446.7
160°	451.8	453.4	448.7	447.8	452.5
162.5°	456.4	458.4	453.6	452.1	456.8
165°	463.4	464.8	460.0	458.1	462.8
167.5°	469.5	471.0	464.9	463.1	468.2
170°	473.0	474.1	467.9	465.6	470.6
172.5°	475.2	476.0	469.8	467.2	470.6
175°	477.2	478.2	472.0	469.0	471.3
177.5°	477.5	478.0	473.4	470.7	474.8
180°	474.8	474.8	474.8	474.8	474.8



TEST NUMBER: P1438587  
 CATALOG NUMBER: CB2-030U-030D-835-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.12	14.93	15.11	15.93	17.26	13.02	13.83	14.01	14.84	16.16
	3H	15.76	16.49	16.76	17.50	18.85	14.54	15.27	15.54	16.28	17.63
	4H	16.38	17.08	17.40	18.09	19.45	15.11	15.80	16.13	16.82	18.17
	6H	16.78	17.42	17.81	18.44	19.81	15.48	16.12	16.51	17.14	18.51
	8H	16.93	17.54	17.96	18.57	19.94	15.62	16.23	16.65	17.26	18.63
	12H	17.00	17.58	18.04	18.61	20.00	15.68	16.26	16.72	17.29	18.68
4H	2H	14.52	15.21	15.54	16.23	17.58	13.64	14.34	14.67	15.35	16.71
	3H	16.38	16.96	17.41	18.00	19.37	15.37	15.95	16.41	17.00	18.37
	4H	17.13	17.66	18.17	18.69	20.08	16.05	16.58	17.09	17.61	19.00
	6H	17.65	18.10	18.69	19.16	20.55	16.52	16.97	17.57	18.03	19.42
	8H	17.85	18.27	18.90	19.32	20.73	16.71	17.13	17.76	18.18	19.59
	12H	17.95	18.34	19.02	19.40	20.81	16.79	17.18	17.86	18.24	19.65
8H	4H	17.28	17.70	18.33	18.76	20.16	16.32	16.74	17.37	17.79	19.20
	6H	17.92	18.27	18.99	19.36	20.76	16.92	17.27	17.99	18.36	19.76
	8H	18.21	18.52	19.29	19.60	21.02	17.19	17.50	18.27	18.58	20.00
	12H	18.38	18.65	19.47	19.73	21.19	17.34	17.61	18.42	18.68	20.14
12H	4H	17.26	17.64	18.33	18.71	20.12	16.32	16.70	17.39	17.77	19.18
	6H	17.95	18.26	19.03	19.33	20.75	16.98	17.29	18.06	18.37	19.79
	8H	18.26	18.53	19.35	19.61	21.07	17.29	17.56	18.37	18.63	20.09