

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438708

Luminaire Tested: CB2-085U-030D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438708
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-085U-030D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
2-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 850 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10553.2 lumens
Efficiency: N/A
Efficacy: 138.9 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 76
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

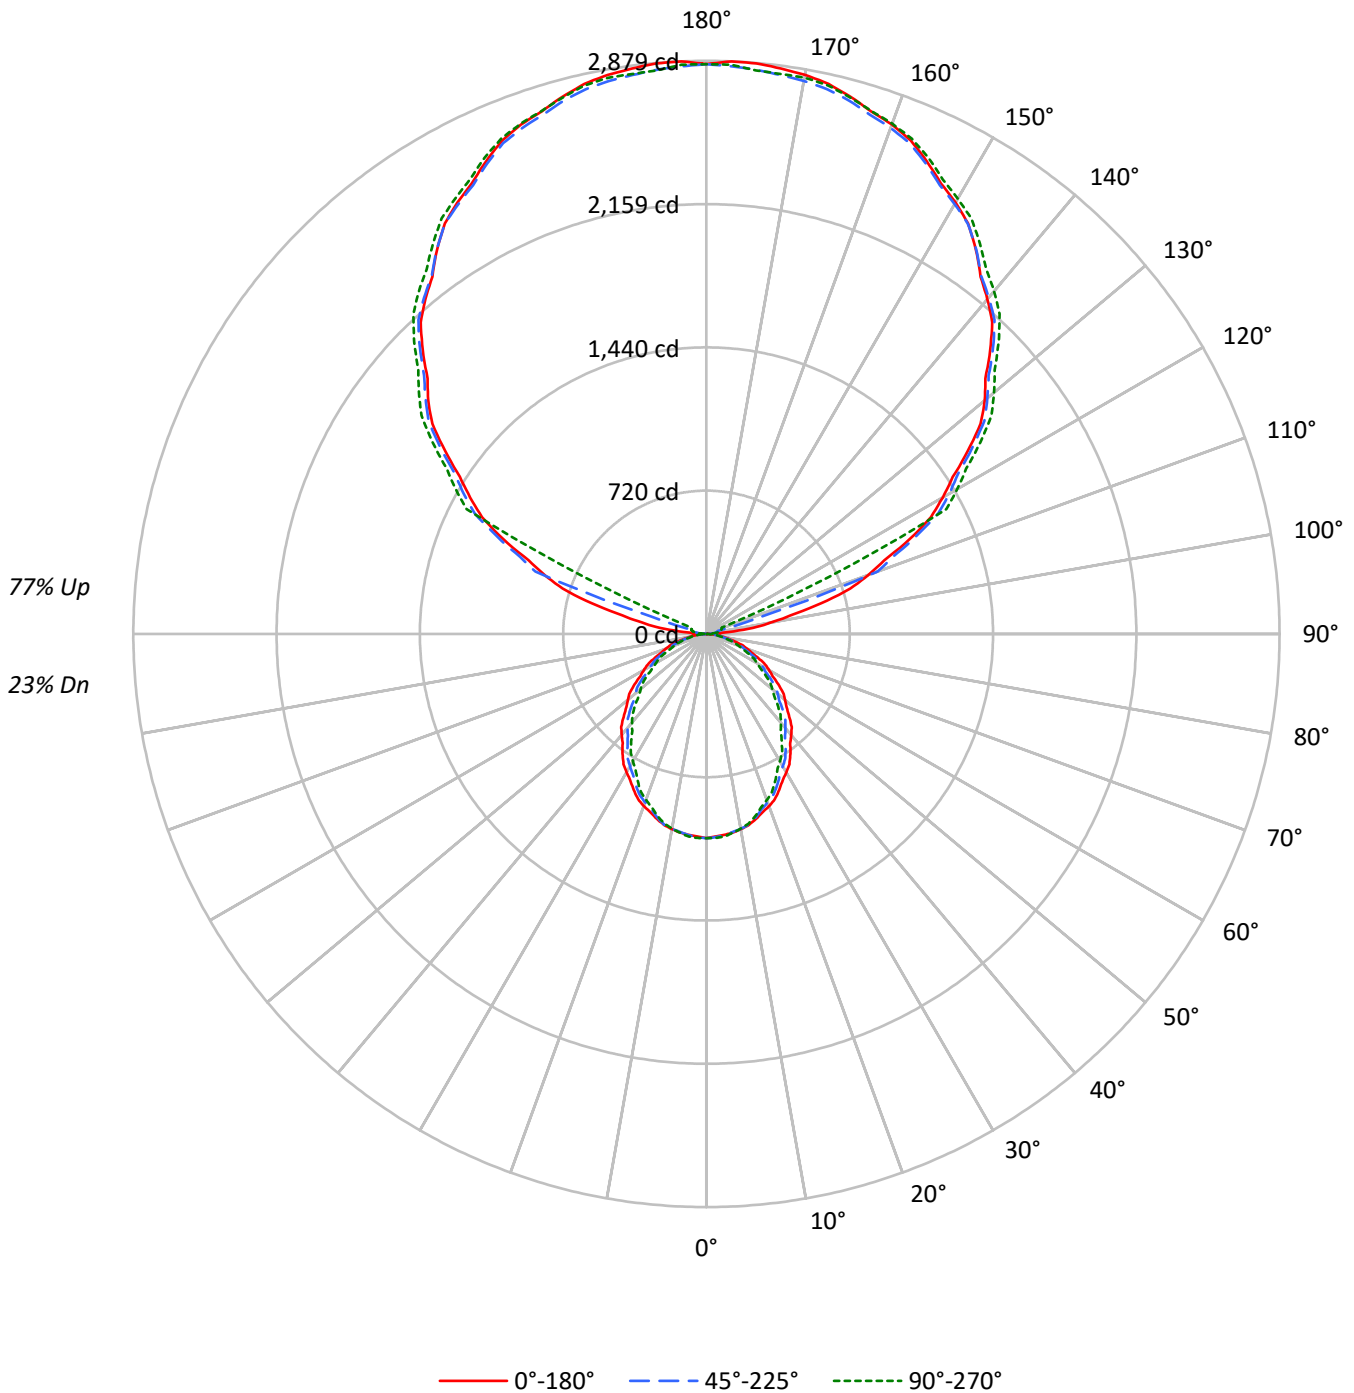



TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	101	101	101	101	89	89	89	89	68	68	68	49	49	49	31	31	31	23																				
1	92	88	84	81	81	78	75	72	60	58	56	43	42	41	27	27	26	19																				
2	84	77	71	66	74	68	63	59	52	49	46	38	36	34	24	23	22	16																				
3	76	67	60	55	67	60	54	49	46	42	39	33	31	29	22	20	19	14																				
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	19	18	16	12																				
5	64	53	45	39	56	47	41	36	37	32	28	27	24	21	17	16	14	10																				
6	59	47	40	34	52	42	36	31	33	28	25	24	21	19	16	14	13	9																				
7	54	42	35	30	48	38	32	27	30	25	22	22	19	16	14	13	11	8																				
8	50	38	31	26	44	34	28	24	27	22	19	20	17	15	13	11	10	7																				
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9	7																				
10	43	32	25	20	38	29	23	19	23	18	15	17	14	12	11	9	8	6																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8935	8935	8935
5°	8859	8873	8935
10°	8809	8788	8781
15°	8670	8613	8542
20°	8533	8344	8227
25°	8304	8070	7843
30°	8074	7718	7426
35°	7809	7358	7007
40°	7529	7020	6608
45°	7247	6667	6221
50°	6992	6322	5843
55°	6679	5964	5487
60°	6321	5624	5131
65°	5941	5244	4777
70°	5520	4820	4321
75°	5024	4361	3913
80°	4494	3822	3546
85°	3457	3138	2588

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7247 cd/sqm



TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.5	0.9
10°-20°	268.9	2.5
20°-30°	386.7	3.7
30°-40°	434.7	4.1
40°-50°	419.9	4.0
50°-60°	354.8	3.4
60°-70°	254.8	2.4
70°-80°	139.3	1.3
80°-90°	37.1	0.4
90°-100°	49.9	0.5
100°-110°	317.4	3.0
110°-120°	1008.6	9.6
120°-130°	1463.6	13.9
130°-140°	1574.1	14.9
140°-150°	1482.1	14.0
150°-160°	1207.4	11.4
160°-170°	785.8	7.4
170°-180°	271.7	2.6
0°-30°	752.1	7.1
0°-40°	1186.8	11.2
0°-60°	1961.4	18.6
0°-90°	2392.7	22.7
90°-120°	1375.9	13.0
90°-150°	5895.7	55.9
90°-180°	8161.0	77.3
0°-180°	10553.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1026	1026	1026	1026	1026	
5°	1013	1027	1015	1015	1022	96
15°	962	970	955	946	947	271
25°	864	865	840	821	816	398
35°	734	726	692	665	659	459
45°	588	576	541	513	505	455
55°	440	424	393	368	361	393
65°	288	278	254	236	232	286
75°	149	140	130	119	116	160
85°	35	32	31	28	26	41
90°	0	0	0	2	2	6
95°	114	33	35	23	21	144
105°	596	618	62	72	77	628
115°	1128	1152	1163	1176	675	1109
125°	1602	1630	1631	1658	1680	1432
135°	2016	2040	2036	2049	2076	1554
145°	2359	2377	2361	2364	2394	1475
155°	2620	2636	2608	2602	2638	1208
165°	2794	2802	2773	2761	2790	789
175°	2876	2883	2845	2827	2841	274
180°	2862	2862	2862	2862	2862	

TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1026.0	1026.0	1026.0	1026.0	1026.0
2.5°	1019.1	1031.4	1022.2	1023.5	1025.4
5°	1013.4	1027.3	1015.0	1015.2	1022.1
7.5°	1006.2	1019.3	1003.8	1001.0	1007.5
10°	996.1	1009.2	993.8	988.4	993.0
12.5°	982.9	995.4	980.6	972.0	976.0
15°	961.6	970.0	955.3	945.9	947.4
17.5°	938.3	943.5	922.3	914.4	912.9
20°	920.7	925.3	900.3	889.3	887.7
22.5°	898.1	902.1	875.8	862.2	860.1
25°	864.2	864.9	839.8	820.8	816.2
27.5°	828.7	826.2	798.3	775.9	769.9
30°	802.9	799.8	767.5	743.8	738.5
32.5°	775.2	769.7	737.4	711.8	706.4
35°	734.5	726.1	692.1	665.3	659.1
37.5°	691.2	681.6	648.3	619.1	612.1
40°	662.3	651.5	617.5	588.3	581.3
42.5°	633.4	621.4	586.7	557.4	549.9
45°	588.4	576.1	541.3	512.8	505.1
47.5°	545.7	530.0	496.2	467.9	460.2
50°	516.1	499.2	466.6	439.0	431.3
52.5°	486.0	468.5	437.1	410.7	403.0
55°	439.9	423.8	392.8	368.3	361.4
57.5°	394.4	378.9	350.5	327.1	320.4
60°	362.9	349.9	322.9	300.7	294.6
62.5°	332.8	321.0	295.2	275.0	268.8
65°	288.3	277.6	254.5	236.4	231.8
67.5°	245.1	234.4	215.7	199.4	194.2
70°	216.8	206.1	189.3	174.3	169.7
72.5°	189.8	178.4	164.8	151.1	147.7
75°	149.3	140.0	129.6	119.3	116.3
77.5°	113.4	104.5	96.9	89.7	88.9
80°	89.6	81.9	76.2	71.5	70.7
82.5°	66.9	61.1	57.3	53.9	53.7
85°	34.6	32.3	31.4	27.5	25.9
87.5°	10.1	10.1	8.8	8.0	8.0
90°	0.0	0.0	0.0	2.1	2.1
92.5°	31.5	12.0	8.3	12.0	12.0
95°	113.8	32.9	35.2	22.7	20.7
97.5°	236.3	53.0	50.9	55.9	57.9
100°	329.0	108.5	55.9	64.2	66.2
102.5°	431.7	408.6	57.5	69.2	72.8
105°	596.0	618.2	62.1	72.5	76.6
107.5°	757.4	779.7	288.9	75.0	79.1
110°	865.0	887.3	914.7	76.7	80.7

TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	966.0	993.1	1014.0	170.6	84.0
115°	1127.8	1152.1	1163.0	1176.4	674.6
117.5°	1270.6	1300.6	1312.8	1336.1	1358.8
120°	1370.0	1398.3	1407.2	1430.5	1454.8
122.5°	1467.6	1492.7	1498.3	1524.8	1547.5
125°	1601.7	1630.1	1630.7	1658.1	1680.4
127.5°	1735.8	1760.1	1759.0	1779.4	1804.1
130°	1825.2	1841.4	1841.8	1858.9	1885.2
132.5°	1899.7	1922.4	1922.9	1936.7	1963.0
135°	2015.6	2039.9	2036.3	2049.3	2075.6
137.5°	2124.5	2147.9	2141.4	2152.4	2179.5
140°	2195.6	2215.9	2206.0	2217.0	2247.4
142.5°	2261.9	2282.1	2267.2	2276.7	2308.6
145°	2359.1	2377.3	2361.2	2364.0	2394.3
147.5°	2445.6	2463.4	2444.0	2446.7	2475.0
150°	2501.9	2518.1	2493.6	2496.4	2524.7
152.5°	2551.6	2566.2	2540.0	2539.5	2572.7
155°	2619.9	2636.1	2607.5	2602.1	2638.5
157.5°	2682.0	2696.9	2668.3	2664.4	2692.7
160°	2723.3	2733.5	2704.7	2699.2	2727.5
162.5°	2751.5	2763.2	2734.5	2725.6	2754.0
165°	2793.7	2801.8	2773.0	2761.2	2789.6
167.5°	2830.1	2839.4	2802.4	2791.9	2822.3
170°	2851.6	2857.7	2820.6	2806.8	2837.2
172.5°	2864.9	2869.3	2832.2	2816.5	2837.2
175°	2876.5	2882.6	2845.4	2827.1	2841.3
177.5°	2878.6	2881.8	2853.7	2837.7	2862.0
180°	2862.0	2862.0	2862.0	2862.0	2862.0



TEST NUMBER: P1438708

CATALOG NUMBER: CB2-085U-030D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.27	11.93	12.43	13.07	14.69	10.17	10.83	11.33	11.97	13.59
	3H	12.90	13.49	14.07	14.64	16.27	11.68	12.27	12.85	13.42	15.05
	4H	13.52	14.08	14.70	15.23	16.87	12.25	12.80	13.42	13.96	15.59
	6H	13.91	14.42	15.10	15.58	17.23	12.61	13.12	13.79	14.28	15.92
	8H	14.05	14.54	15.24	15.71	17.35	12.74	13.23	13.93	14.40	16.04
	12H	14.12	14.58	15.31	15.75	17.41	12.80	13.26	13.99	14.42	16.08
4H	2H	11.65	12.21	12.84	13.37	15.00	10.78	11.34	11.96	12.49	14.13
	3H	13.50	13.97	14.69	15.15	16.80	12.49	12.96	13.69	14.14	15.79
	4H	14.24	14.67	15.43	15.84	17.50	13.16	13.59	14.35	14.76	16.42
	6H	14.75	15.12	15.95	16.31	17.96	13.62	13.99	14.82	15.18	16.83
	8H	14.95	15.29	16.14	16.47	18.14	13.81	14.15	15.00	15.33	17.00
	12H	15.05	15.36	16.26	16.55	18.22	13.89	14.20	15.10	15.39	17.06
8H	4H	14.38	14.72	15.58	15.91	17.58	13.42	13.76	14.61	14.94	16.61
	6H	15.01	15.30	16.23	16.52	18.19	14.01	14.29	15.23	15.52	17.19
	8H	15.30	15.55	16.52	16.75	18.44	14.29	14.53	15.50	15.73	17.42
	12H	15.47	15.68	16.69	16.88	18.60	14.43	14.64	15.65	15.84	17.56
12H	4H	14.35	14.66	15.56	15.85	17.53	13.41	13.72	14.62	14.91	16.59
	6H	15.04	15.29	16.26	16.49	18.18	14.07	14.32	15.29	15.52	17.21
	8H	15.35	15.56	16.57	16.76	18.48	14.37	14.59	15.59	15.79	17.50