

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438878

Luminaire Tested: CB2-B-030U-120D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438878
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-B-030U-120D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
2-INCH APERTURE
DOWNLIGHT 1200 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13128.7 lumens
Efficiency: N/A
Efficacy: 123.0 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 106.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438878

CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

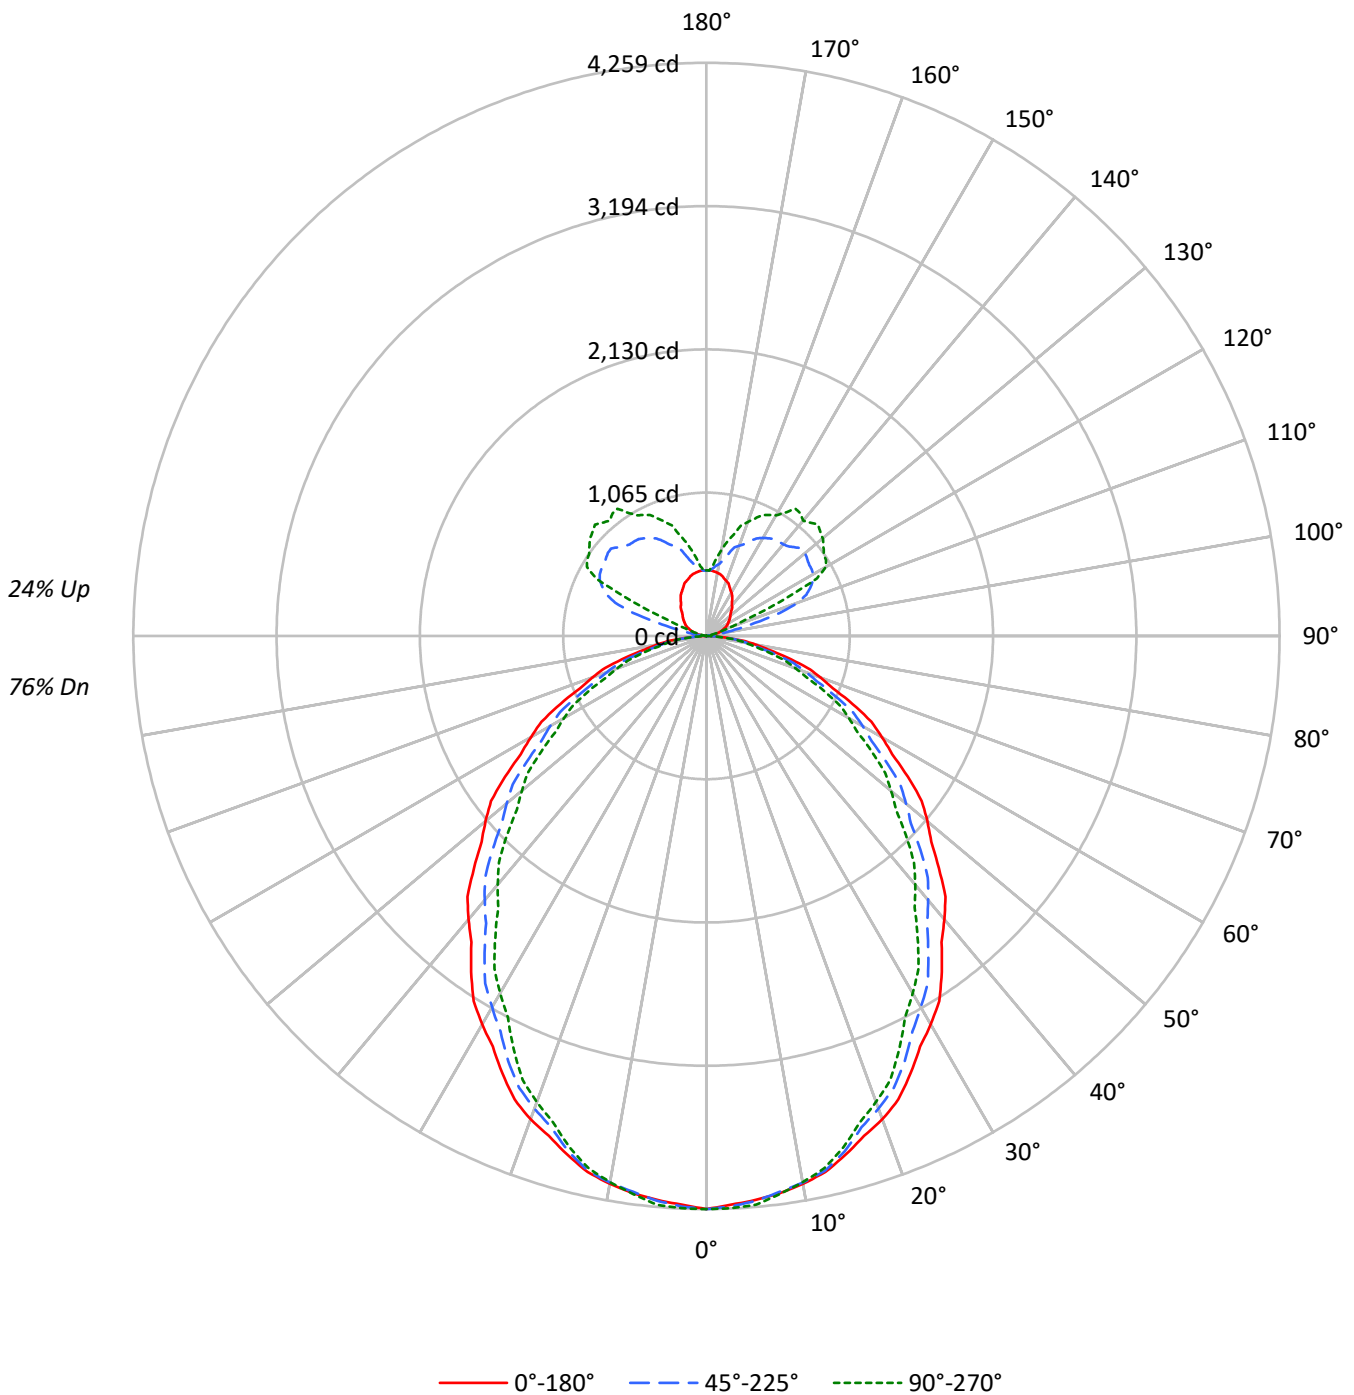



TEST NUMBER: P1438878

CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	88	88	88	80	80	80	76
1	104	99	95	92	99	95	91	88	86	83	81	78	76	74	71	69	68	64
2	95	87	81	76	90	83	78	73	76	71	68	69	66	62	63	60	58	54
3	87	77	69	63	82	74	67	61	67	62	57	61	57	53	56	52	49	46
4	80	68	60	54	75	66	58	52	60	54	49	55	50	46	50	46	43	40
5	73	61	53	47	70	59	51	45	54	48	43	49	44	40	45	41	38	35
6	68	55	47	41	64	53	45	40	49	42	38	45	40	35	41	37	33	31
7	63	50	42	36	60	48	41	35	45	38	33	41	36	32	38	33	30	27
8	58	46	38	32	56	44	37	31	41	34	30	38	32	28	35	30	27	25
9	55	42	34	29	52	40	33	28	38	31	27	35	29	26	32	28	24	22
10	51	39	31	26	49	37	30	26	35	29	25	32	27	23	30	25	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	37089	37089	37089
5°	36775	36832	37089
10°	36566	36479	36450
15°	35987	35752	35458
20°	35420	34634	34150
25°	34468	33497	32557
30°	33514	32038	30825
35°	32415	30544	29087
40°	31252	29139	27433
45°	30082	27671	25824
50°	29027	26243	24255
55°	27727	24756	22776
60°	26241	23344	21300
65°	24662	21773	19823
70°	22916	20011	17936
75°	20848	18106	16238
80°	18646	15863	14719
85°	14339	13030	10751

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30082 cd/sqm



TEST NUMBER: P1438878

CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	400.5	3.1
10°-20°	1116.4	8.5
20°-30°	1605.2	12.2
30°-40°	1804.2	13.7
40°-50°	1742.9	13.3
50°-60°	1472.6	11.2
60°-70°	1057.8	8.1
70°-80°	578.1	4.4
80°-90°	153.5	1.2
90°-100°	36.5	0.3
100°-110°	225.8	1.7
110°-120°	569.4	4.3
120°-130°	684.5	5.2
130°-140°	620.6	4.7
140°-150°	494.9	3.8
150°-160°	337.6	2.6
160°-170°	178.5	1.4
170°-180°	49.7	0.4
0°-30°	3122.1	23.8
0°-40°	4926.4	37.5
0°-60°	8141.9	62.0
0°-90°	9931.3	75.6
90°-120°	831.7	6.3
90°-150°	2631.6	20.0
90°-180°	3197.0	24.4
0°-180°	13128.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4259	4259	4259	4259	4259	
5°	4207	4264	4213	4214	4243	399
15°	3992	4027	3965	3926	3933	1125
25°	3587	3590	3486	3407	3388	1651
35°	3049	3014	2873	2762	2736	1905
45°	2442	2392	2247	2129	2097	1887
55°	1826	1759	1630	1529	1500	1633
65°	1197	1152	1057	981	962	1187
75°	620	581	538	495	483	663
85°	144	134	130	114	108	171
90°	0	0	0	0	0	6
95°	19	48	15	10	10	24
105°	92	258	373	94	63	97
115°	159	352	852	793	604	156
125°	208	427	929	1057	1063	186
135°	260	473	931	1090	1170	202
145°	334	498	879	1059	1154	208
155°	405	507	782	943	992	186
165°	459	502	631	743	778	129
175°	487	493	501	510	520	46
180°	487	487	487	487	487	

TEST NUMBER: P1438878

CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4258.9	4258.9	4258.9	4258.9	4258.9
2.5°	4230.2	4281.2	4243.2	4248.6	4256.3
5°	4206.7	4264.1	4213.2	4213.9	4242.6
7.5°	4176.7	4230.9	4166.9	4155.1	4181.9
10°	4135.0	4189.2	4125.2	4102.8	4121.9
12.5°	4080.2	4131.8	4070.4	4034.9	4051.5
15°	3991.5	4026.6	3965.4	3926.4	3932.8
17.5°	3895.0	3916.6	3828.4	3795.7	3789.3
20°	3821.9	3841.0	3737.1	3691.3	3684.9
22.5°	3728.0	3744.6	3635.4	3579.1	3570.2
25°	3587.1	3590.3	3486.0	3407.3	3388.2
27.5°	3439.7	3429.5	3313.8	3220.7	3195.8
30°	3332.8	3320.0	3186.0	3087.7	3065.4
32.5°	3218.0	3195.0	3060.8	2954.6	2932.3
35°	3049.0	3014.0	2873.0	2761.5	2736.0
37.5°	2869.0	2829.5	2691.0	2569.7	2541.0
40°	2749.0	2704.4	2563.2	2441.8	2413.1
42.5°	2629.0	2579.3	2435.3	2314.0	2282.7
45°	2442.5	2391.5	2246.8	2128.7	2096.8
47.5°	2265.1	2200.1	2059.7	1942.2	1910.3
50°	2142.5	2072.3	1937.0	1822.2	1790.3
52.5°	2017.3	1944.6	1814.4	1704.8	1672.9
55°	1826.2	1759.2	1630.5	1528.8	1500.1
57.5°	1637.0	1572.6	1455.1	1357.9	1329.8
60°	1506.6	1452.4	1340.3	1248.4	1222.9
62.5°	1381.4	1332.3	1225.5	1141.4	1115.9
65°	1196.8	1152.2	1056.6	981.1	962.0
67.5°	1017.4	972.8	895.5	827.8	806.1
70°	900.0	855.4	785.9	723.5	704.4
72.5°	787.9	740.7	684.2	627.1	613.1
75°	619.6	581.3	538.1	495.4	482.6
77.5°	470.9	433.9	402.4	372.3	369.1
80°	371.8	339.9	316.3	296.7	293.5
82.5°	277.8	253.6	238.1	223.7	223.1
85°	143.5	133.9	130.4	114.0	107.6
87.5°	41.7	41.7	36.5	31.3	31.3
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.0	8.3	3.4	3.4	3.4
95°	18.9	47.6	14.7	10.5	10.5
97.5°	39.4	114.1	79.3	21.3	18.5
100°	54.5	165.3	136.3	31.3	25.2
102.5°	69.6	209.9	215.2	49.7	38.6
105°	92.3	258.4	373.3	93.7	62.9
107.5°	114.5	290.1	572.2	193.3	116.6
110°	127.9	308.4	721.5	301.4	180.4



TEST NUMBER: P1438878

CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	141.4	326.8	803.7	483.1	311.3
115°	159.4	352.2	851.6	792.7	604.1
117.5°	174.5	375.5	892.7	980.3	925.0
120°	184.6	393.8	914.5	1007.2	1025.6
122.5°	194.6	407.1	926.2	1017.6	1052.5
125°	207.6	427.1	929.2	1057.2	1063.4
127.5°	220.6	442.1	943.0	1093.7	1096.5
130°	230.7	452.2	956.4	1105.9	1128.4
132.5°	242.5	460.7	961.5	1112.8	1146.9
135°	260.1	473.4	931.3	1090.4	1170.4
137.5°	282.3	482.5	902.3	1089.7	1141.4
140°	295.7	484.4	887.2	1113.8	1117.9
142.5°	310.8	489.7	883.9	1111.2	1146.5
145°	333.5	497.6	878.8	1059.2	1153.6
147.5°	356.1	502.6	859.5	1001.9	1084.4
150°	371.2	504.5	841.1	982.8	1034.0
152.5°	386.3	506.5	817.6	970.8	1013.9
155°	404.8	507.3	782.3	942.9	992.1
157.5°	424.1	504.9	740.0	891.8	945.5
160°	434.2	501.8	713.1	854.7	901.9
162.5°	444.2	500.4	689.6	806.3	861.6
165°	459.3	502.4	631.3	743.3	778.1
167.5°	469.4	500.6	576.8	668.5	717.7
170°	476.1	500.7	543.2	611.3	652.3
172.5°	481.1	492.6	523.1	559.0	586.9
175°	486.6	492.8	501.3	509.9	520.2
177.5°	488.3	491.6	484.9	483.3	486.6
180°	486.6	486.6	486.6	486.6	486.6



TEST NUMBER: P1438878
 CATALOG NUMBER: CB2-B-030U-120D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.66	22.79	22.36	23.51	24.36	20.56	21.69	21.26	22.41	23.26
	3H	23.32	24.34	24.04	25.07	25.95	22.11	23.12	22.82	23.85	24.74
	4H	23.96	24.92	24.70	25.66	26.56	22.69	23.65	23.43	24.39	25.29
	6H	24.38	25.26	25.13	26.01	26.92	23.08	23.96	23.82	24.71	25.62
	8H	24.54	25.38	25.29	26.15	27.06	23.22	24.07	23.98	24.84	25.75
	12H	24.62	25.42	25.38	26.18	27.12	23.30	24.10	24.06	24.86	25.80
4H	2H	22.10	23.06	22.84	23.80	24.69	21.22	22.18	21.96	22.92	23.82
	3H	23.99	24.79	24.74	25.57	26.48	22.98	23.78	23.74	24.56	25.47
	4H	24.75	25.47	25.52	26.25	27.20	23.67	24.39	24.43	25.17	26.11
	6H	25.28	25.91	26.07	26.71	27.66	24.16	24.79	24.94	25.59	26.54
	8H	25.49	26.08	26.28	26.88	27.84	24.35	24.94	25.14	25.74	26.70
	12H	25.61	26.14	26.42	26.96	27.93	24.45	24.98	25.26	25.80	26.77
8H	4H	24.93	25.51	25.71	26.31	27.27	23.96	24.55	24.75	25.35	26.31
	6H	25.58	26.06	26.40	26.91	27.87	24.58	25.06	25.40	25.90	26.87
	8H	25.87	26.30	26.70	27.14	28.12	24.85	25.29	25.68	26.13	27.11
	12H	26.06	26.44	26.89	27.27	28.31	25.02	25.40	25.85	26.23	27.26
12H	4H	24.92	25.45	25.73	26.27	27.23	23.98	24.51	24.79	25.33	26.29
	6H	25.61	26.04	26.44	26.88	27.86	24.64	25.07	25.47	25.91	26.89
	8H	25.94	26.32	26.77	27.15	28.19	24.96	25.34	25.79	26.17	27.21