

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439078

Luminaire Tested: CB2-D-125U-030D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439078
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-125U-030D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12837.9 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 114.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

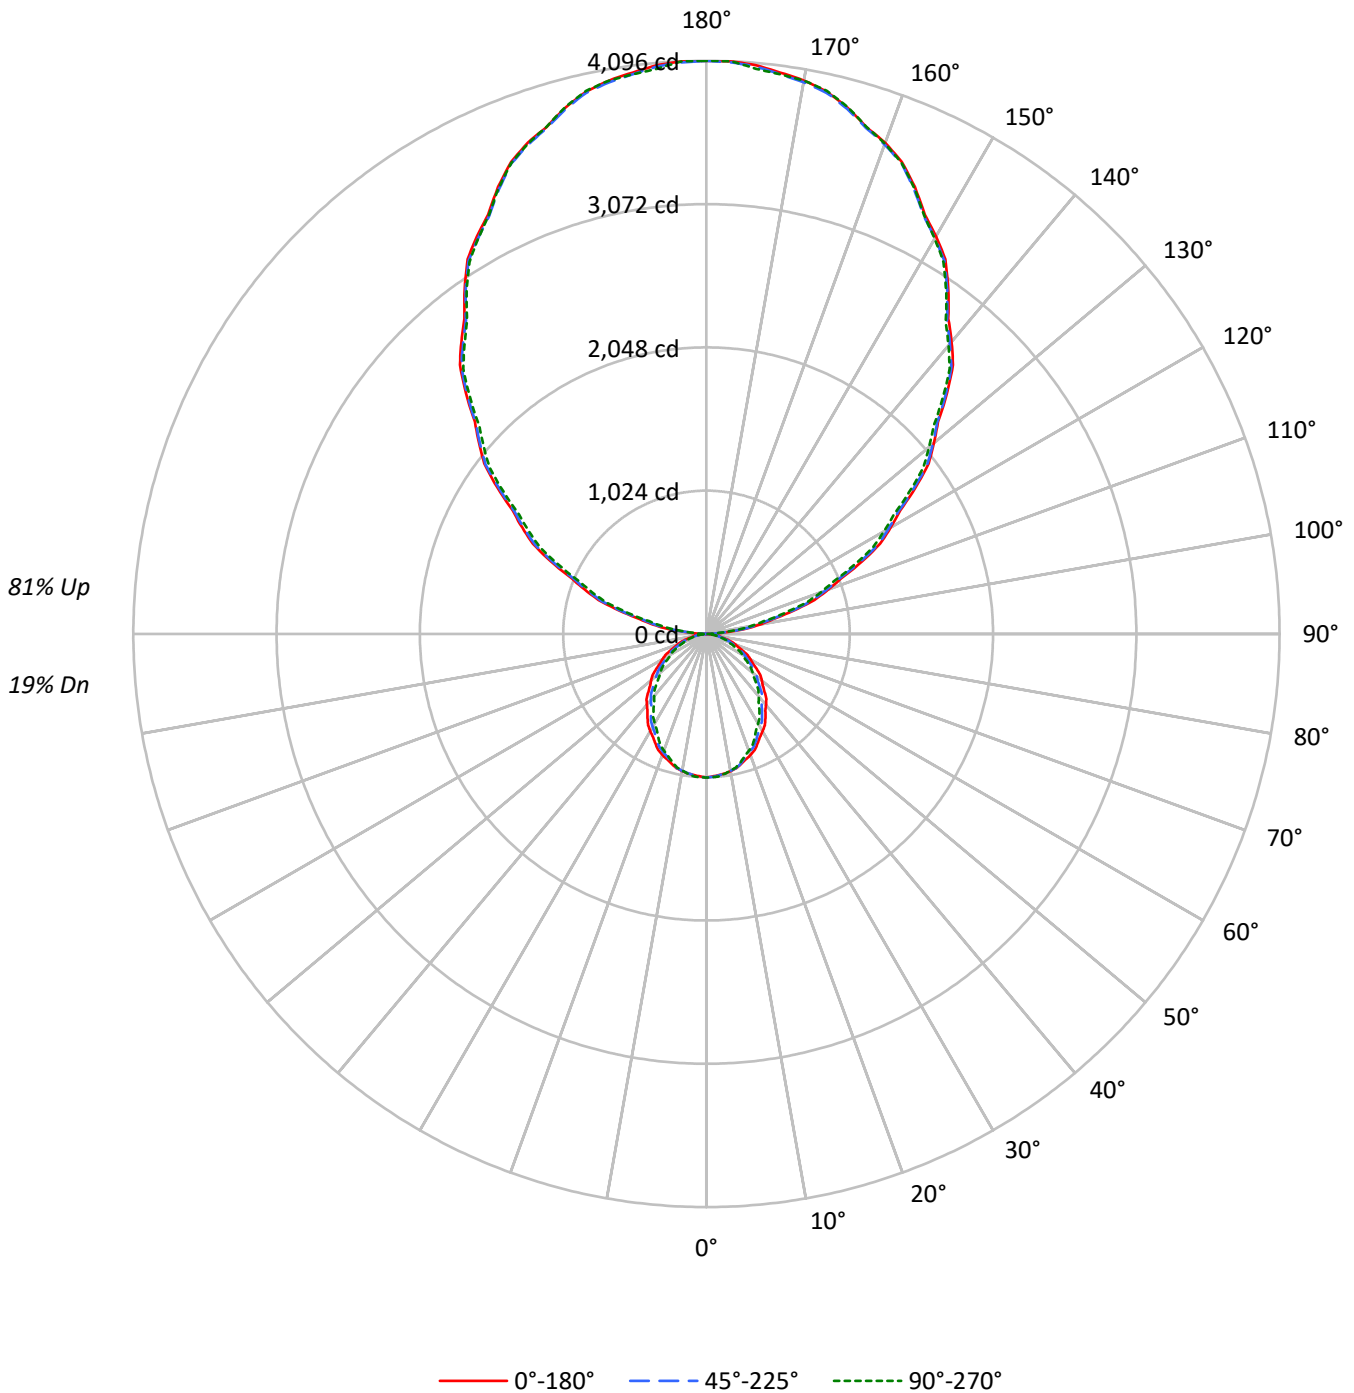



TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	100	100	100	100	88	88	88	88	66	66	66	46	46	46	27	27	27	19																				
1	91	87	83	80	80	77	74	71	58	56	54	40	39	38	24	24	23	16																				
2	83	76	70	65	73	67	62	58	51	47	45	35	33	32	21	20	20	13																				
3	75	67	60	54	66	59	53	49	45	41	38	31	29	27	19	18	17	11																				
4	69	59	51	46	60	52	46	41	40	35	32	28	25	23	17	16	14	10																				
5	63	52	45	39	55	46	40	35	35	31	27	25	22	20	15	14	13	9																				
6	58	47	39	34	51	41	35	30	32	27	24	22	20	17	14	12	11	8																				
7	53	42	34	29	47	37	31	26	29	24	21	20	17	15	13	11	10	7																				
8	49	38	31	26	44	34	27	23	26	21	18	19	16	13	12	10	9	6																				
9	46	34	27	23	40	31	25	20	24	19	16	17	14	12	11	9	8	5																				
10	43	31	25	20	38	28	22	18	22	17	14	16	13	11	10	8	7	5																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8935	8935	8935
5°	8859	8873	8935
10°	8809	8788	8781
15°	8670	8613	8542
20°	8533	8344	8227
25°	8304	8070	7843
30°	8074	7718	7426
35°	7809	7358	7007
40°	7529	7020	6608
45°	7247	6667	6221
50°	6992	6322	5843
55°	6679	5964	5487
60°	6321	5624	5131
65°	5941	5244	4777
70°	5520	4820	4321
75°	5024	4361	3913
80°	4494	3822	3546
85°	3457	3138	2588

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7247 cd/sqm



TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.5	0.8
10°-20°	268.9	2.1
20°-30°	386.7	3.0
30°-40°	434.7	3.4
40°-50°	419.9	3.3
50°-60°	354.8	2.8
60°-70°	254.8	2.0
70°-80°	139.3	1.1
80°-90°	37.2	0.3
90°-100°	158.2	1.2
100°-110°	652.5	5.1
110°-120°	1184.6	9.2
120°-130°	1611.9	12.6
130°-140°	1860.8	14.5
140°-150°	1875.2	14.6
150°-160°	1618.2	12.6
160°-170°	1096.8	8.5
170°-180°	386.9	3.0
0°-30°	752.1	5.9
0°-40°	1186.8	9.2
0°-60°	1961.4	15.3
0°-90°	2392.7	18.6
90°-120°	1995.4	15.5
90°-150°	7343.3	57.2
90°-180°	10445.0	81.4
0°-180°	12837.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1026	1026	1026	1026	1026	
5°	1013	1027	1015	1015	1022	96
15°	962	970	955	946	947	271
25°	864	865	840	821	816	398
35°	734	726	692	665	659	459
45°	588	576	541	513	505	455
55°	440	424	393	368	361	393
65°	288	278	254	236	232	286
75°	149	140	130	119	116	160
85°	35	32	31	28	26	41
90°	0	0	3	0	3	7
95°	153	135	128	99	99	178
105°	645	636	620	584	578	685
115°	1227	1224	1201	1166	1163	1211
125°	1824	1843	1805	1767	1770	1629
135°	2431	2459	2418	2374	2390	1872
145°	3013	3047	3000	2965	2987	1882
155°	3524	3558	3508	3486	3514	1620
165°	3894	3935	3885	3863	3898	1097
175°	4080	4123	4070	4045	4054	387
180°	4096	4096	4096	4096	4096	

TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1026.0	1026.0	1026.0	1026.0	1026.0
2.5°	1019.1	1031.4	1022.2	1023.5	1025.4
5°	1013.4	1027.3	1015.0	1015.2	1022.1
7.5°	1006.2	1019.3	1003.8	1001.0	1007.5
10°	996.1	1009.2	993.8	988.4	993.0
12.5°	982.9	995.4	980.6	972.0	976.0
15°	961.6	970.0	955.3	945.9	947.4
17.5°	938.3	943.5	922.3	914.4	912.9
20°	920.7	925.3	900.3	889.3	887.7
22.5°	898.1	902.1	875.8	862.2	860.1
25°	864.2	864.9	839.8	820.8	816.2
27.5°	828.7	826.2	798.3	775.9	769.9
30°	802.9	799.8	767.5	743.8	738.5
32.5°	775.2	769.7	737.4	711.8	706.4
35°	734.5	726.1	692.1	665.3	659.1
37.5°	691.2	681.6	648.3	619.1	612.1
40°	662.3	651.5	617.5	588.3	581.3
42.5°	633.4	621.4	586.7	557.4	549.9
45°	588.4	576.1	541.3	512.8	505.1
47.5°	545.7	530.0	496.2	467.9	460.2
50°	516.1	499.2	466.6	439.0	431.3
52.5°	486.0	468.5	437.1	410.7	403.0
55°	439.9	423.8	392.8	368.3	361.4
57.5°	394.4	378.9	350.5	327.1	320.4
60°	362.9	349.9	322.9	300.7	294.6
62.5°	332.8	321.0	295.2	275.0	268.8
65°	288.3	277.6	254.5	236.4	231.8
67.5°	245.1	234.4	215.7	199.4	194.2
70°	216.8	206.1	189.3	174.3	169.7
72.5°	189.8	178.4	164.8	151.1	147.7
75°	149.3	140.0	129.6	119.3	116.3
77.5°	113.4	104.5	96.9	89.7	88.9
80°	89.6	81.9	76.2	71.5	70.7
82.5°	66.9	61.1	57.3	53.9	53.7
85°	34.6	32.3	31.4	27.5	25.9
87.5°	10.1	10.1	9.4	7.6	8.2
90°	0.0	0.0	3.2	0.1	3.2
92.5°	38.3	33.3	31.3	20.5	23.6
95°	153.3	134.6	127.8	99.0	99.0
97.5°	289.4	270.7	260.7	231.2	224.9
100°	386.6	367.8	357.8	325.7	319.5
102.5°	486.2	477.5	460.0	425.4	419.1
105°	645.3	636.0	619.8	584.5	578.2
107.5°	808.9	810.8	786.5	757.6	748.8
110°	926.5	923.3	904.1	875.2	869.0



TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1046.6	1041.0	1021.7	992.8	986.5
115°	1226.8	1223.7	1201.2	1166.0	1162.9
117.5°	1398.0	1408.0	1381.4	1344.3	1343.1
120°	1520.7	1533.2	1501.5	1469.4	1463.2
122.5°	1640.8	1655.8	1624.2	1587.2	1588.4
125°	1824.2	1842.9	1805.0	1766.8	1769.9
127.5°	2001.2	2024.3	1989.0	1950.1	1953.9
130°	2121.3	2149.4	2111.7	2070.3	2076.6
132.5°	2244.0	2272.1	2234.4	2190.6	2201.8
135°	2431.2	2459.3	2418.4	2374.0	2389.7
137.5°	2607.5	2635.6	2590.9	2553.6	2572.4
140°	2725.1	2753.2	2705.9	2671.2	2690.0
142.5°	2840.1	2873.2	2823.5	2786.3	2810.1
145°	3012.6	3047.0	2999.8	2965.2	2987.1
147.5°	3176.2	3210.6	3162.8	3129.4	3151.9
150°	3281.0	3315.3	3265.0	3236.8	3261.8
152.5°	3378.1	3417.5	3364.7	3336.7	3369.2
155°	3523.8	3558.1	3507.8	3486.1	3514.2
157.5°	3650.3	3690.3	3640.1	3621.4	3643.9
160°	3734.6	3772.1	3721.9	3703.3	3728.2
162.5°	3798.5	3838.5	3790.9	3769.8	3799.8
165°	3894.4	3935.0	3884.8	3863.2	3897.6
167.5°	3969.8	4012.9	3962.1	3939.9	3974.9
170°	4015.8	4056.4	4003.0	3978.3	4015.8
172.5°	4046.4	4089.5	4033.7	4008.7	4033.7
175°	4079.7	4123.4	4070.1	4044.7	4054.1
177.5°	4095.6	4130.6	4088.0	4065.6	4095.6
180°	4095.6	4095.6	4095.6	4095.6	4095.6



TEST NUMBER: P1439078

CATALOG NUMBER: CB2-D-125U-030D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.51	11.14	11.70	12.31	13.97	9.41	10.04	10.60	11.21	12.87
	3H	12.14	12.70	13.33	13.88	15.55	10.92	11.49	12.11	12.66	14.33
	4H	12.76	13.29	13.96	14.47	16.15	11.48	12.02	12.68	13.20	14.87
	6H	13.15	13.64	14.35	14.82	16.50	11.84	12.34	13.05	13.51	15.20
	8H	13.29	13.76	14.50	14.95	16.63	11.98	12.45	13.19	13.64	15.32
	12H	13.35	13.80	14.57	14.98	16.68	12.03	12.48	13.24	13.66	15.36
4H	2H	10.89	11.43	12.10	12.60	14.28	10.02	10.55	11.23	11.73	13.41
	3H	12.74	13.19	13.95	14.39	16.08	11.73	12.18	12.94	13.38	15.07
	4H	13.48	13.89	14.69	15.08	16.78	12.39	12.81	13.61	13.99	15.70
	6H	13.98	14.34	15.20	15.55	17.24	12.86	13.21	14.07	14.42	16.11
	8H	14.18	14.51	15.40	15.71	17.42	13.04	13.37	14.26	14.57	16.28
	12H	14.28	14.58	15.51	15.79	17.50	13.12	13.42	14.35	14.63	16.34
8H	4H	13.61	13.94	14.83	15.14	16.86	12.65	12.98	13.86	14.18	15.89
	6H	14.25	14.52	15.48	15.76	17.47	13.24	13.52	14.48	14.76	16.47
	8H	14.53	14.77	15.77	15.99	17.72	13.52	13.75	14.76	14.97	16.70
	12H	14.70	14.91	15.94	16.12	17.88	13.66	13.86	14.90	15.08	16.84
12H	4H	13.58	13.88	14.81	15.09	16.81	12.64	12.94	13.87	14.15	15.87
	6H	14.27	14.51	15.51	15.73	17.46	13.31	13.54	14.54	14.76	16.49
	8H	14.58	14.79	15.82	16.00	17.76	13.60	13.81	14.84	15.03	16.78