

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438623

Luminaire Tested: CB2-030U-085D-935-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1438623  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB2-030U-085D-935-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT  
2-INCH APERTURE  
DOWNLIGHT 850 LUMENS PER FOOT  
UPLIGHT 300 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4889.0 lumens  
Efficiency: N/A  
Efficacy: 131.8 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 37.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

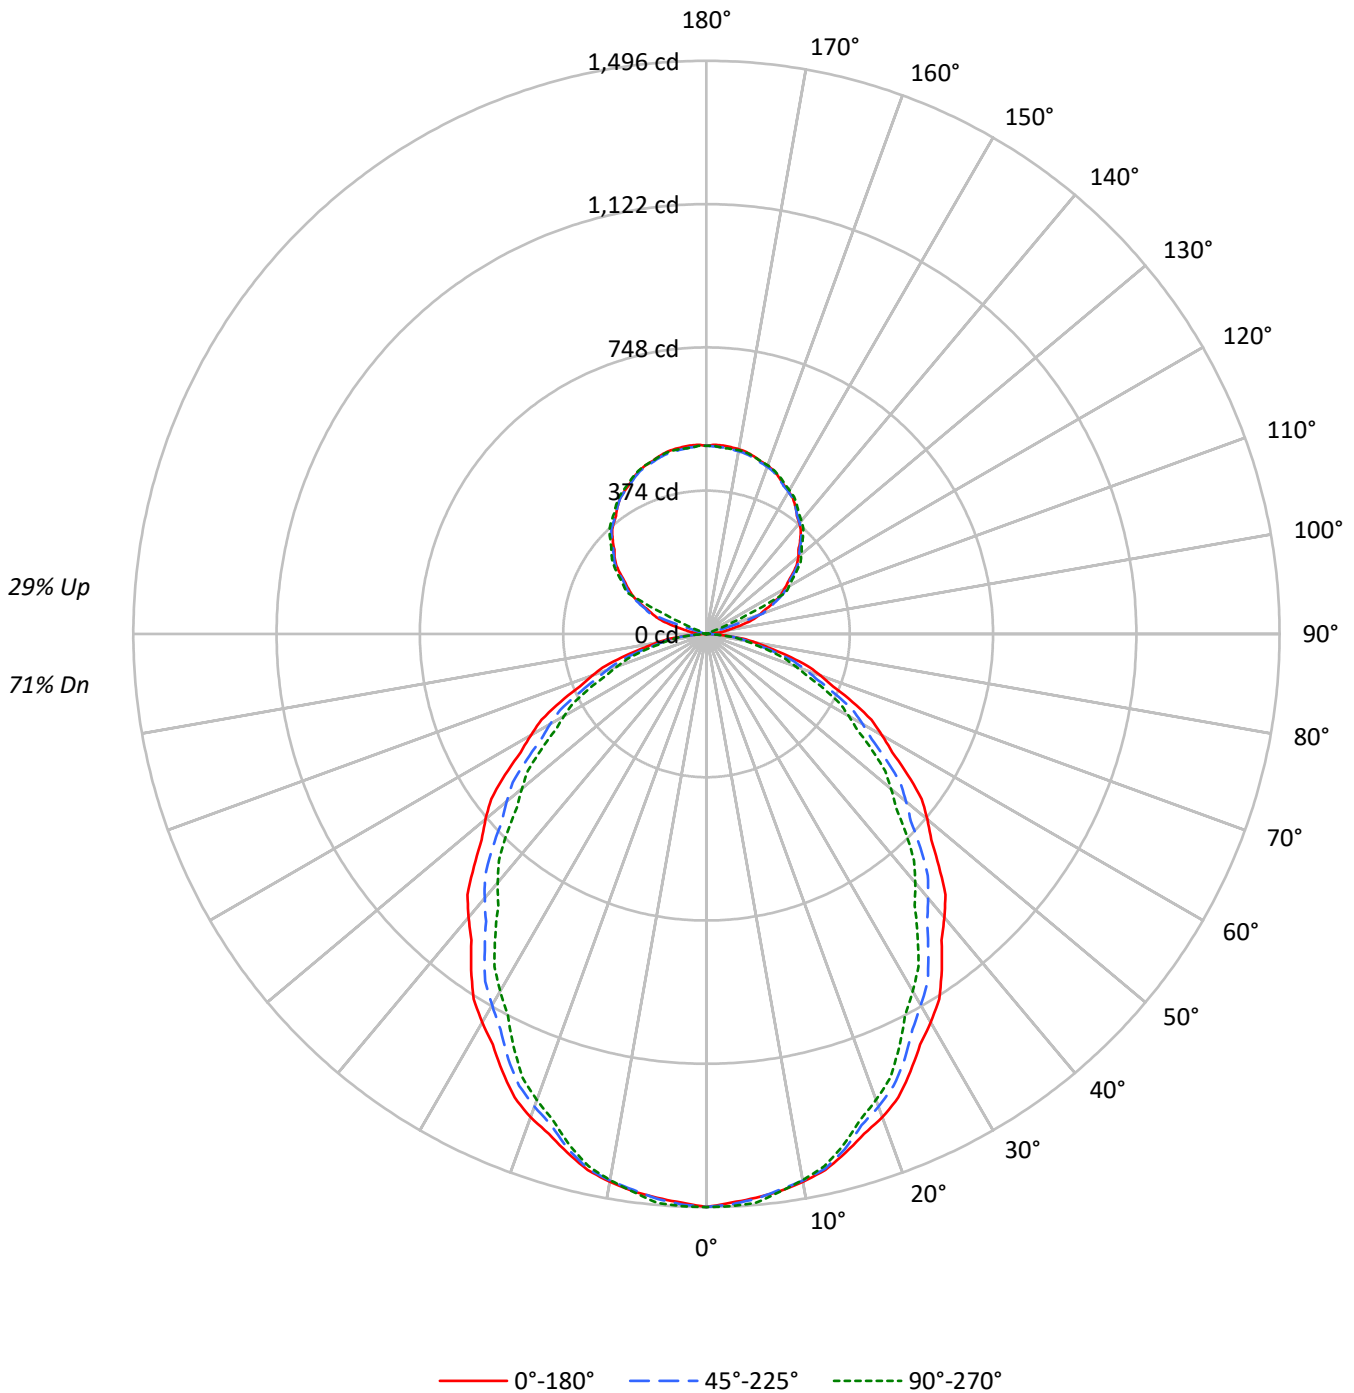



TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	76	76	76	71														
1	103	98	95	91	97	93	90	87	84	81	79	75	73	71	67	66	65	65	65	65	65	65	65	61														
2	94	86	80	75	89	82	76	72	74	70	66	66	63	60	60	57	55	55	55	55	55	55	55	51														
3	86	76	69	63	81	72	66	60	65	60	56	59	55	51	53	50	47	47	47	47	47	47	47	44														
4	79	68	60	53	74	64	57	52	58	53	48	53	48	44	48	44	41	41	41	41	41	41	41	38														
5	72	61	52	46	68	58	50	45	53	46	42	48	43	39	43	39	36	36	36	36	36	36	36	33														
6	67	55	46	40	63	52	45	39	48	41	37	43	38	34	39	35	32	32	32	32	32	32	32	29														
7	62	50	41	36	59	47	40	35	43	37	32	39	34	30	36	32	28	28	28	28	28	28	28	26														
8	58	45	37	32	55	43	36	31	40	33	29	36	31	27	33	29	25	25	25	25	25	25	25	23														
9	54	41	34	29	51	40	33	28	37	30	26	33	28	25	31	26	23	23	23	23	23	23	23	21														
10	51	38	31	26	48	37	30	25	34	28	24	31	26	22	28	24	21	21	21	21	21	21	21	19														

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	26055	26055	26055
5°	25832	25873	26053
10°	25685	25625	25606
15°	25279	25115	24907
20°	24882	24329	23990
25°	24213	23530	22869
30°	23543	22505	21654
35°	22770	21456	20433
40°	21955	20470	19272
45°	21132	19439	18141
50°	20390	18437	17038
55°	19477	17391	16000
60°	18435	16400	14961
65°	17326	15294	13926
70°	16097	14055	12599
75°	14643	12719	11407
80°	13100	11144	10341
85°	10072	9153	7554

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21132 cd/sqm



TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	140.7	2.9
10°-20°	392.1	8.0
20°-30°	563.8	11.5
30°-40°	633.7	13.0
40°-50°	612.2	12.5
50°-60°	517.2	10.6
60°-70°	371.5	7.6
70°-80°	203.1	4.2
80°-90°	54.0	1.1
90°-100°	8.6	0.2
100°-110°	54.5	1.1
110°-120°	173.1	3.5
120°-130°	251.2	5.1
130°-140°	270.2	5.5
140°-150°	254.4	5.2
150°-160°	207.2	4.2
160°-170°	134.9	2.8
170°-180°	46.6	1.0
0°-30°	1096.6	22.4
0°-40°	1730.3	35.4
0°-60°	2859.7	58.5
0°-90°	3488.3	71.3
90°-120°	236.2	4.8
90°-150°	1012.0	20.7
90°-180°	1401.0	28.7
0°-180°	4889.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1496	1496	1496	1496	1496	
5°	1478	1498	1480	1480	1490	140
15°	1402	1414	1393	1379	1381	395
25°	1260	1261	1224	1197	1190	580
35°	1071	1059	1009	970	961	669
45°	858	840	789	748	736	663
55°	641	618	573	537	527	573
65°	420	405	371	345	338	417
75°	218	204	189	174	170	233
85°	50	47	46	40	38	60
90°	0	0	0	0	0	3
95°	20	6	6	4	4	25
105°	102	106	11	12	13	108
115°	194	198	200	202	116	190
125°	275	280	280	285	288	246
135°	346	350	350	352	356	267
145°	405	408	405	406	411	253
155°	450	452	448	447	453	207
165°	480	481	476	474	479	135
175°	494	495	488	485	488	47
180°	491	491	491	491	491	

TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1495.9	1495.9	1495.9	1495.9	1495.9
2.5°	1485.8	1503.7	1490.4	1492.3	1494.9
5°	1477.5	1497.7	1479.8	1480.1	1490.1
7.5°	1467.0	1486.0	1463.6	1459.4	1468.8
10°	1452.3	1471.4	1448.9	1441.0	1447.8
12.5°	1433.1	1451.2	1429.7	1417.2	1423.0
15°	1401.9	1414.3	1392.8	1379.1	1381.3
17.5°	1368.0	1375.7	1344.7	1333.2	1330.9
20°	1342.4	1349.1	1312.6	1296.5	1294.3
22.5°	1309.4	1315.2	1276.9	1257.1	1254.0
25°	1259.9	1261.0	1224.4	1196.8	1190.0
27.5°	1208.1	1204.6	1163.9	1131.2	1122.5
30°	1170.6	1166.1	1119.0	1084.5	1076.7
32.5°	1130.3	1122.2	1075.1	1037.8	1029.9
35°	1070.9	1058.6	1009.1	969.9	961.0
37.5°	1007.7	993.8	945.2	902.6	892.5
40°	965.6	949.9	900.3	857.7	847.6
42.5°	923.4	905.9	855.4	812.7	801.8
45°	857.9	840.0	789.2	747.7	736.5
47.5°	795.6	772.7	723.4	682.2	671.0
50°	752.5	727.9	680.4	640.0	628.8
52.5°	708.5	683.0	637.3	598.8	587.6
55°	641.4	617.9	572.7	537.0	526.9
57.5°	575.0	552.4	511.1	476.9	467.1
60°	529.2	510.1	470.8	438.5	429.5
62.5°	485.2	467.9	430.4	400.9	391.9
65°	420.4	404.7	371.1	344.6	337.9
67.5°	357.4	341.7	314.5	290.8	283.1
70°	316.1	300.4	276.0	254.1	247.4
72.5°	276.7	260.1	240.3	220.3	215.3
75°	217.6	204.2	189.0	174.0	169.5
77.5°	165.4	152.4	141.3	130.8	129.7
80°	130.6	119.4	111.1	104.2	103.1
82.5°	97.6	89.1	83.6	78.6	78.3
85°	50.4	47.0	45.8	40.0	37.8
87.5°	14.7	14.7	12.8	11.1	11.1
90°	0.0	0.0	0.0	0.4	0.4
92.5°	5.4	2.1	1.4	2.1	2.1
95°	19.5	5.6	6.0	3.9	3.6
97.5°	40.6	9.1	8.7	9.6	9.9
100°	56.5	18.6	9.6	11.0	11.4
102.5°	74.1	70.1	9.9	11.9	12.5
105°	102.3	106.1	10.7	12.4	13.1
107.5°	130.0	133.8	49.6	12.9	13.6
110°	148.5	152.3	157.0	13.2	13.9



TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	165.8	170.5	174.0	29.3	14.4
115°	193.6	197.8	199.6	201.9	115.8
117.5°	218.1	223.2	225.3	229.3	233.2
120°	235.1	240.0	241.5	245.5	249.7
122.5°	251.9	256.2	257.2	261.7	265.6
125°	274.9	279.8	279.9	284.6	288.4
127.5°	297.9	302.1	301.9	305.4	309.7
130°	313.3	316.1	316.1	319.1	323.6
132.5°	326.1	330.0	330.1	332.4	336.9
135°	346.0	350.1	349.5	351.8	356.3
137.5°	364.6	368.7	367.6	369.4	374.1
140°	376.9	380.3	378.6	380.5	385.7
142.5°	388.2	391.7	389.2	390.8	396.3
145°	404.9	408.1	405.3	405.8	411.0
147.5°	419.8	422.8	419.5	420.0	424.8
150°	429.4	432.2	428.0	428.5	433.3
152.5°	438.0	440.5	436.0	435.9	441.6
155°	449.7	452.5	447.6	446.6	452.9
157.5°	460.3	462.9	458.0	457.3	462.2
160°	467.4	469.2	464.2	463.3	468.2
162.5°	472.3	474.3	469.4	467.8	472.7
165°	479.5	480.9	476.0	473.9	478.8
167.5°	485.8	487.4	481.0	479.2	484.4
170°	489.5	490.5	484.1	481.8	487.0
172.5°	491.7	492.5	486.1	483.4	487.0
175°	493.7	494.8	488.4	485.3	487.7
177.5°	494.1	494.6	489.8	487.1	491.2
180°	491.2	491.2	491.2	491.2	491.2



TEST NUMBER: P1438623

CATALOG NUMBER: CB2-030U-085D-935-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.11	21.18	20.86	21.95	22.88	19.01	20.08	19.76	20.85	21.78
	3H	21.77	22.73	22.53	23.51	24.48	20.55	21.51	21.32	22.30	23.26
	4H	22.41	23.32	23.19	24.11	25.08	21.13	22.04	21.92	22.83	23.81
	6H	22.82	23.66	23.62	24.46	25.44	21.52	22.36	22.31	23.15	24.14
	8H	22.97	23.77	23.78	24.59	25.58	21.66	22.46	22.47	23.28	24.27
	12H	23.06	23.82	23.87	24.63	25.64	21.73	22.49	22.54	23.31	24.32
4H	2H	20.54	21.45	21.33	22.24	23.22	19.67	20.58	20.45	21.37	22.34
	3H	22.43	23.19	23.23	24.01	25.00	21.42	22.18	22.22	23.00	23.99
	4H	23.18	23.87	24.00	24.70	25.72	22.10	22.79	22.92	23.62	24.63
	6H	23.72	24.31	24.55	25.16	26.18	22.59	23.19	23.42	24.04	25.06
	8H	23.93	24.48	24.76	25.33	26.36	22.78	23.34	23.62	24.19	25.22
	12H	24.04	24.54	24.90	25.41	26.45	22.88	23.38	23.74	24.25	25.29
8H	4H	23.36	23.91	24.19	24.76	25.79	22.39	22.95	23.23	23.79	24.83
	6H	24.01	24.47	24.87	25.36	26.39	23.01	23.47	23.87	24.35	25.39
	8H	24.30	24.71	25.17	25.59	26.64	23.28	23.69	24.16	24.57	25.63
	12H	24.48	24.84	25.36	25.72	26.83	23.44	23.80	24.32	24.68	25.78
12H	4H	23.35	23.85	24.20	24.71	25.75	22.41	22.91	23.26	23.77	24.81
	6H	24.04	24.45	24.91	25.33	26.38	23.07	23.48	23.94	24.36	25.41
	8H	24.37	24.73	25.24	25.60	26.71	23.39	23.75	24.26	24.62	25.73