

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438989

Luminaire Tested: CB2-D-030U-055D-935-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438989
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-030U-055D-935-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3479.4 lumens
Efficiency: N/A
Efficacy: 129.8 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 26.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438989

CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

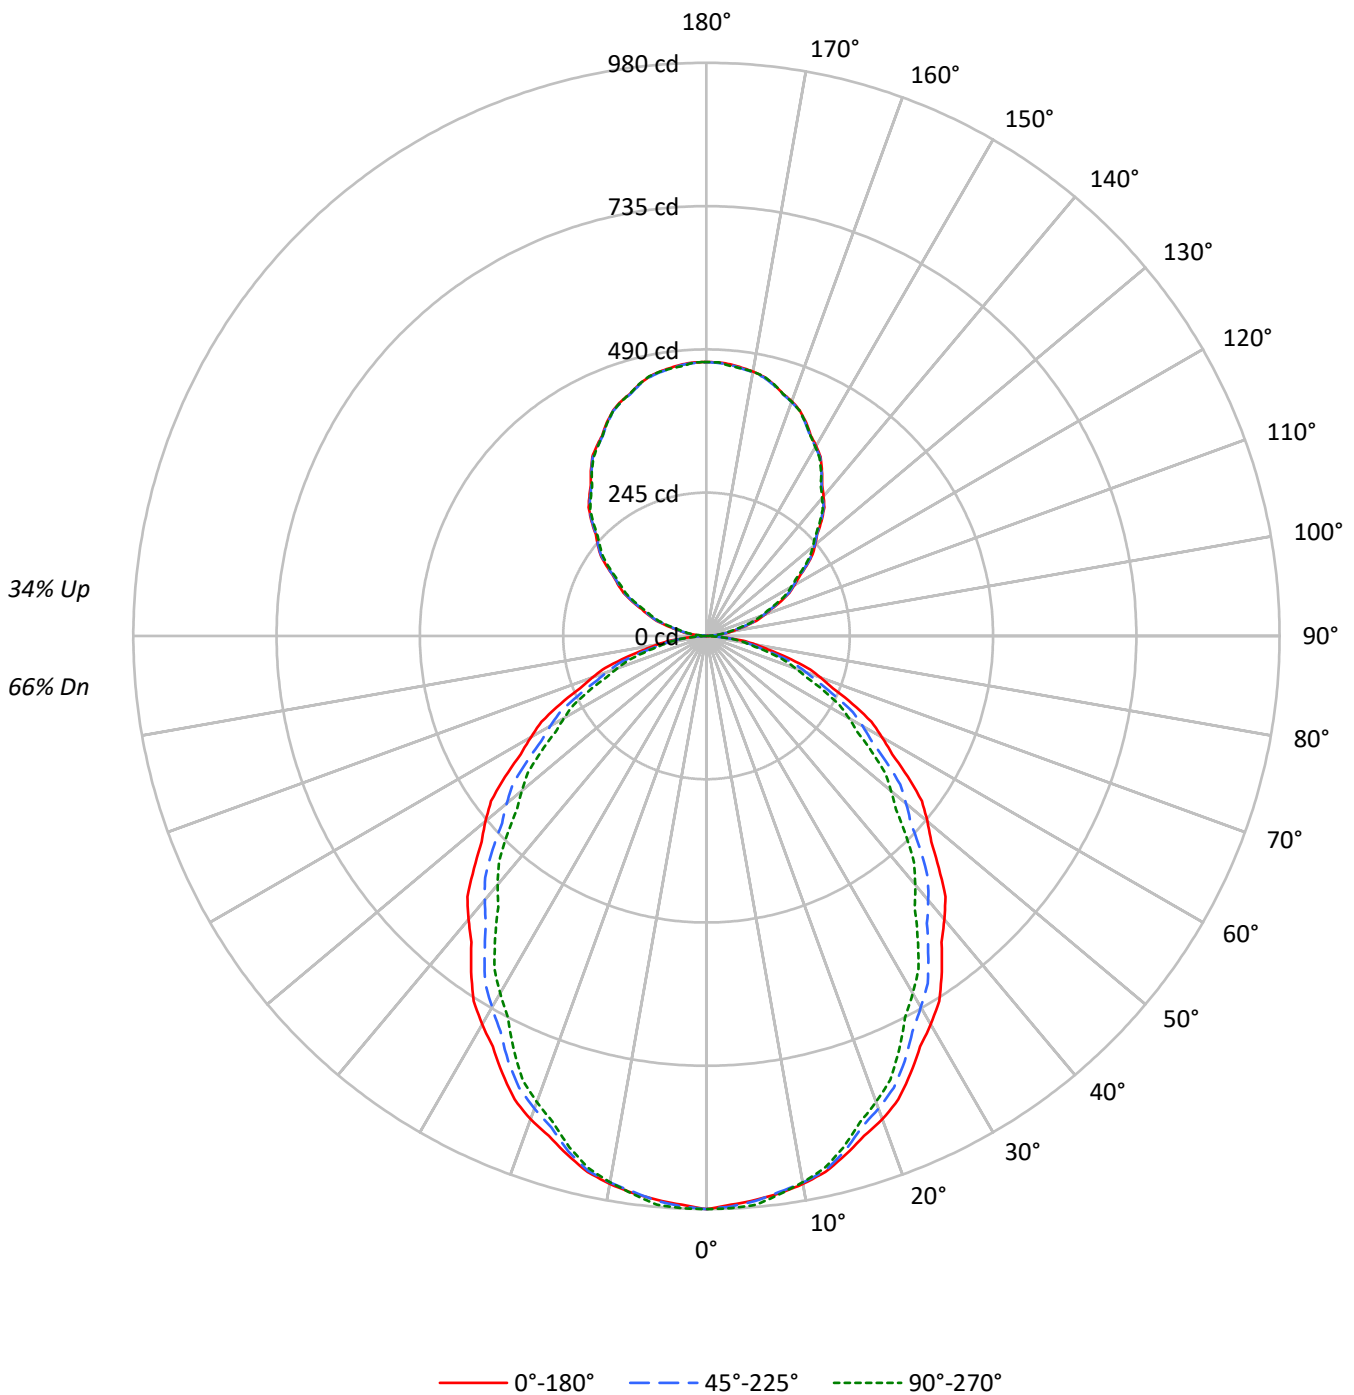



TEST NUMBER: P1438989

CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	61	60	56
2	93	85	79	74	87	80	75	70	71	67	64	63	60	57	55	53	51	47
3	85	75	68	62	79	71	64	59	63	58	54	56	52	49	49	46	44	40
4	78	67	59	53	73	63	56	50	56	51	46	50	46	42	44	41	38	35
5	71	60	51	45	67	57	49	44	51	45	40	45	40	37	40	36	33	30
6	66	54	46	40	62	51	44	38	46	40	35	41	36	32	36	32	29	27
7	61	49	41	35	57	46	39	34	42	36	31	37	32	29	33	29	26	24
8	57	44	37	31	54	42	35	30	38	32	28	34	29	26	31	27	24	21
9	53	41	33	28	50	39	32	27	35	29	25	32	27	23	28	24	21	19
10	50	37	30	25	47	36	29	24	32	27	23	29	25	21	26	22	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17069	17069	17069
5°	16924	16951	17070
10°	16828	16788	16775
15°	16562	16454	16319
20°	16302	15938	15716
25°	15862	15417	14984
30°	15424	14744	14187
35°	14918	14057	13387
40°	14383	13410	12626
45°	13843	12735	11885
50°	13359	12077	11164
55°	12760	11393	10482
60°	12077	10743	9802
65°	11350	10019	9125
70°	10547	9207	8255
75°	9596	8331	7477
80°	8576	7302	6770
85°	6595	5995	4956

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13843 cd/sqm



TEST NUMBER: P1438989

CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.2	2.6
10°-20°	256.9	7.4
20°-30°	369.4	10.6
30°-40°	415.2	11.9
40°-50°	401.1	11.5
50°-60°	338.9	9.7
60°-70°	243.4	7.0
70°-80°	133.0	3.8
80°-90°	35.4	1.0
90°-100°	18.1	0.5
100°-110°	74.6	2.1
110°-120°	135.4	3.9
120°-130°	184.3	5.3
130°-140°	212.7	6.1
140°-150°	214.4	6.2
150°-160°	185.0	5.3
160°-170°	125.4	3.6
170°-180°	44.2	1.3
0°-30°	718.4	20.6
0°-40°	1133.6	32.6
0°-60°	1873.5	53.8
0°-90°	2285.3	65.7
90°-120°	228.1	6.6
90°-150°	839.5	24.1
90°-180°	1194.0	34.3
0°-180°	3479.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	980	980	980	980	980	
5°	968	981	970	970	976	92
15°	918	926	912	904	905	259
25°	825	826	802	784	780	380
35°	702	694	661	635	630	438
45°	562	550	517	490	482	434
55°	420	405	375	352	345	376
65°	275	265	243	226	221	273
75°	143	134	124	114	111	153
85°	33	31	30	26	25	39
90°	0	0	0	0	0	2
95°	18	15	15	11	11	20
105°	74	73	71	67	66	78
115°	140	140	137	133	133	138
125°	208	211	206	202	202	186
135°	278	281	276	271	273	214
145°	344	348	343	339	342	215
155°	403	407	401	398	402	185
165°	445	450	444	442	446	125
175°	466	471	465	462	464	44
180°	468	468	468	468	468	

TEST NUMBER: P1438989

CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	980.0	980.0	980.0	980.0	980.0
2.5°	973.4	985.1	976.4	977.6	979.4
5°	968.0	981.2	969.5	969.7	976.3
7.5°	961.1	973.6	958.8	956.1	962.3
10°	951.5	964.0	949.2	944.1	948.5
12.5°	938.9	950.8	936.6	928.5	932.3
15°	918.5	926.5	912.5	903.5	905.0
17.5°	896.3	901.3	881.0	873.4	872.0
20°	879.5	883.9	859.9	849.4	847.9
22.5°	857.8	861.7	836.5	823.6	821.5
25°	825.4	826.2	802.2	784.1	779.7
27.5°	791.5	789.2	762.5	741.1	735.4
30°	766.9	764.0	733.1	710.5	705.4
32.5°	740.5	735.2	704.3	679.9	674.8
35°	701.6	693.5	661.1	635.4	629.6
37.5°	660.2	651.1	619.2	591.3	584.7
40°	632.6	622.3	589.8	561.9	555.3
42.5°	605.0	593.5	560.4	532.5	525.3
45°	562.0	550.3	517.0	489.8	482.5
47.5°	521.2	506.3	473.9	446.9	439.6
50°	493.0	476.9	445.7	419.3	412.0
52.5°	464.2	447.5	417.5	392.3	385.0
55°	420.2	404.8	375.2	351.8	345.2
57.5°	376.7	361.9	334.8	312.5	306.0
60°	346.7	334.2	308.4	287.3	281.4
62.5°	317.9	306.6	282.0	262.7	256.8
65°	275.4	265.1	243.1	225.8	221.4
67.5°	234.1	223.8	206.1	190.5	185.5
70°	207.1	196.8	180.8	166.5	162.1
72.5°	181.3	170.4	157.4	144.3	141.1
75°	142.6	133.8	123.8	114.0	111.1
77.5°	108.4	99.8	92.6	85.7	84.9
80°	85.5	78.2	72.8	68.3	67.5
82.5°	63.9	58.4	54.8	51.5	51.3
85°	33.0	30.8	30.0	26.2	24.8
87.5°	9.6	9.6	8.5	7.2	7.3
90°	0.0	0.0	0.4	0.0	0.4
92.5°	4.4	3.8	3.6	2.3	2.7
95°	17.5	15.4	14.6	11.3	11.3
97.5°	33.1	30.9	29.8	26.4	25.7
100°	44.2	42.0	40.9	37.2	36.5
102.5°	55.6	54.6	52.6	48.6	47.9
105°	73.8	72.7	70.9	66.8	66.1
107.5°	92.5	92.7	89.9	86.6	85.6
110°	105.9	105.6	103.4	100.1	99.3



TEST NUMBER: P1438989

CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	119.6	119.0	116.8	113.5	112.8
115°	140.2	139.9	137.3	133.3	132.9
117.5°	159.8	161.0	157.9	153.7	153.5
120°	173.8	175.3	171.6	168.0	167.3
122.5°	187.6	189.3	185.7	181.4	181.6
125°	208.5	210.7	206.3	202.0	202.3
127.5°	228.8	231.4	227.4	222.9	223.4
130°	242.5	245.7	241.4	236.7	237.4
132.5°	256.5	259.7	255.4	250.4	251.7
135°	277.9	281.1	276.5	271.4	273.2
137.5°	298.1	301.3	296.2	291.9	294.1
140°	311.5	314.7	309.3	305.4	307.5
142.5°	324.7	328.5	322.8	318.5	321.2
145°	344.4	348.3	342.9	339.0	341.5
147.5°	363.1	367.0	361.6	357.7	360.3
150°	375.1	379.0	373.2	370.0	372.9
152.5°	386.2	390.7	384.6	381.4	385.2
155°	402.8	406.8	401.0	398.5	401.7
157.5°	417.3	421.9	416.1	414.0	416.6
160°	426.9	431.2	425.5	423.3	426.2
162.5°	434.2	438.8	433.4	431.0	434.4
165°	445.2	449.8	444.1	441.6	445.6
167.5°	453.8	458.7	452.9	450.4	454.4
170°	459.1	463.7	457.6	454.8	459.1
172.5°	462.6	467.5	461.1	458.3	461.1
175°	466.4	471.4	465.3	462.4	463.5
177.5°	468.2	472.2	467.3	464.8	468.2
180°	468.2	468.2	468.2	468.2	468.2



TEST NUMBER: P1438989
 CATALOG NUMBER: CB2-D-030U-055D-935-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.20	19.20	19.01	20.04	21.07	17.10	18.10	17.91	18.94	19.97
	3H	19.85	20.76	20.68	21.60	22.66	18.64	19.54	19.46	20.38	21.44
	4H	20.49	21.34	21.33	22.19	23.26	19.22	20.07	20.06	20.92	21.99
	6H	20.90	21.68	21.75	22.54	23.62	19.60	20.38	20.45	21.24	22.32
	8H	21.05	21.80	21.91	22.67	23.76	19.74	20.49	20.60	21.36	22.45
	12H	21.13	21.84	22.00	22.71	23.82	19.81	20.52	20.68	21.39	22.50
4H	2H	18.62	19.48	19.47	20.33	21.39	17.75	18.60	18.60	19.45	20.52
	3H	20.51	21.22	21.36	22.10	23.18	19.50	20.21	20.36	21.09	22.17
	4H	21.26	21.90	22.13	22.78	23.90	20.18	20.82	21.05	21.70	22.81
	6H	21.79	22.34	22.67	23.25	24.36	20.66	21.22	21.55	22.12	23.24
	8H	21.99	22.52	22.88	23.41	24.54	20.85	21.38	21.74	22.27	23.40
	12H	22.11	22.58	23.02	23.49	24.63	20.95	21.42	21.86	22.34	23.47
8H	4H	21.43	21.95	22.31	22.85	23.97	20.46	20.98	21.35	21.88	23.01
	6H	22.07	22.50	22.99	23.45	24.57	21.07	21.50	21.99	22.44	23.57
	8H	22.36	22.75	23.29	23.68	24.82	21.35	21.73	22.27	22.66	23.81
	12H	22.55	22.88	23.47	23.81	25.00	21.50	21.84	22.43	22.77	23.96
12H	4H	21.41	21.88	22.32	22.80	23.93	20.47	20.94	21.38	21.86	22.99
	6H	22.10	22.49	23.03	23.42	24.56	21.14	21.52	22.06	22.45	23.60
	8H	22.43	22.76	23.36	23.69	24.88	21.45	21.79	22.38	22.71	23.91