

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439021

Luminaire Tested: CB2-D-055U-055D-935-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439021
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-055U-055D-935-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 550 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4590.5 lumens
Efficiency: N/A
Efficacy: 132.7 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 34.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439021

CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

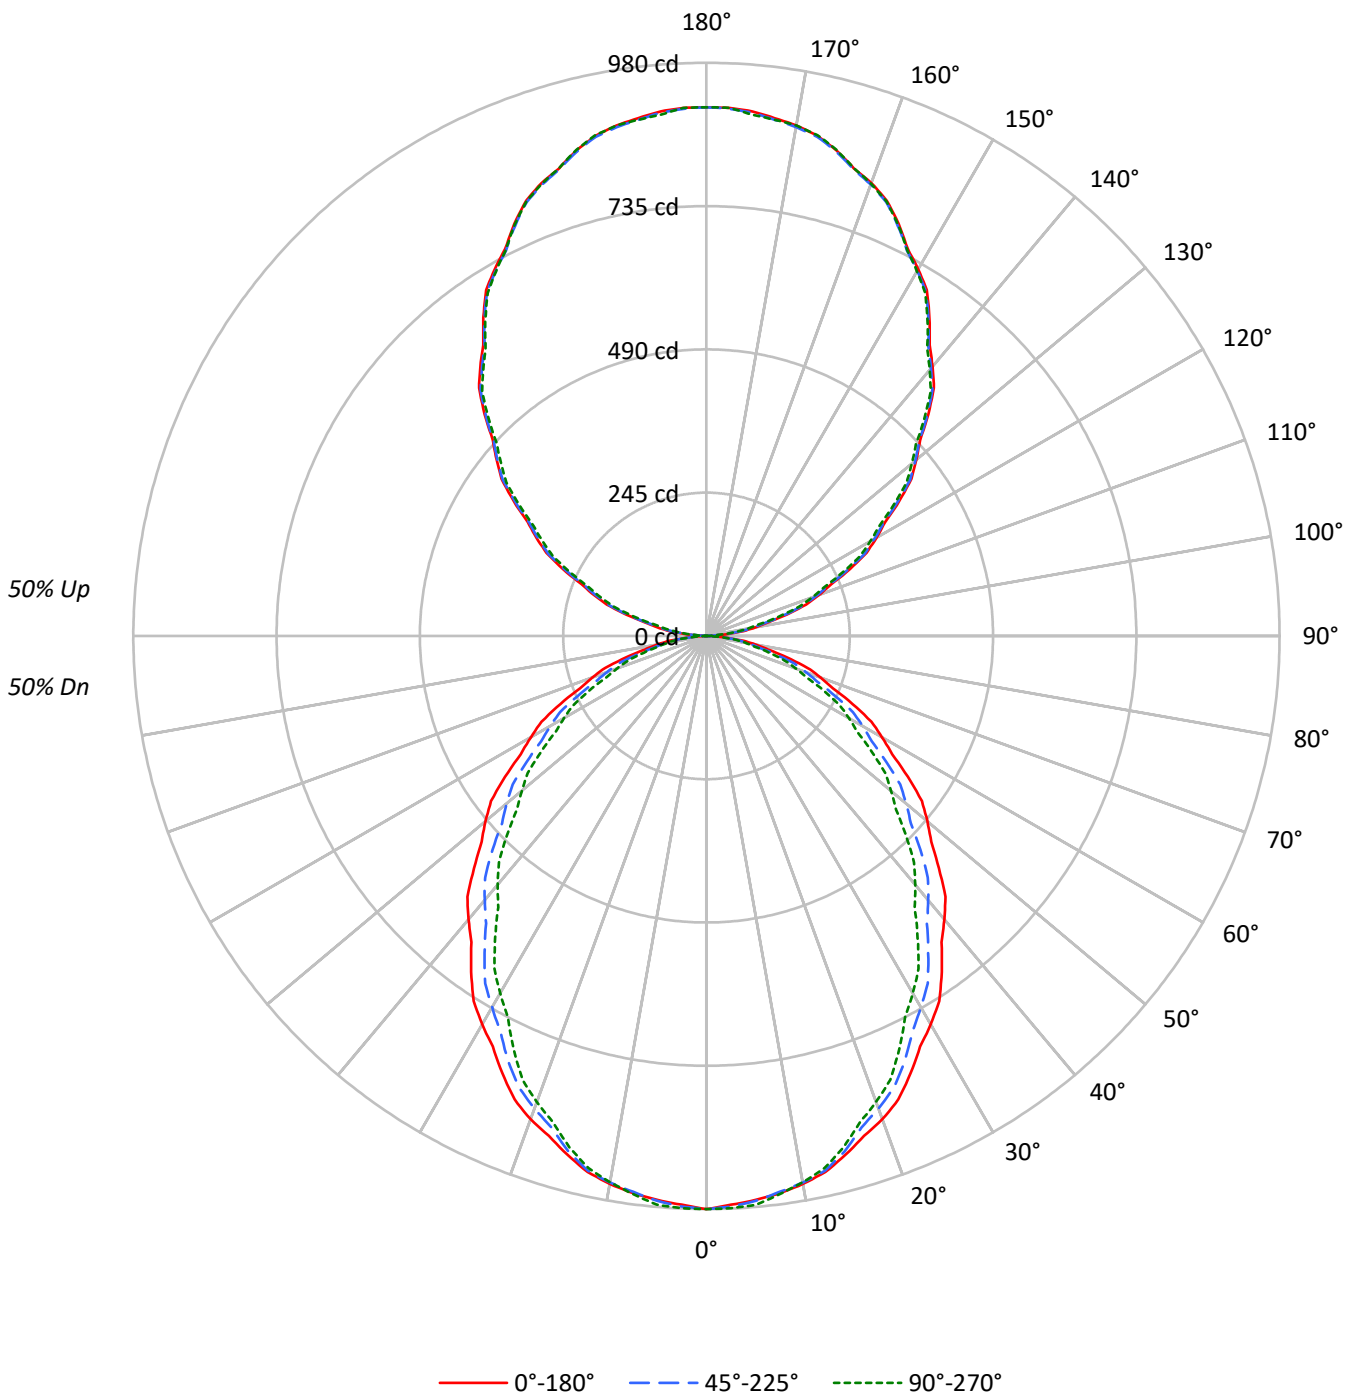



TEST NUMBER: P1439021

CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50					50			
1	98	94	90	86	90	87	83	80	73	71	69	61	59	58	50	49	48	42					42			
2	89	82	76	71	82	76	71	66	64	60	57	54	51	49	44	42	40	36					36			
3	82	72	65	59	75	67	61	56	57	52	48	48	44	41	39	37	35	30					30			
4	75	64	56	50	69	59	53	47	51	45	41	43	39	36	35	32	30	26					26			
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	32	29	26	23					23			
6	63	51	43	38	58	48	41	35	41	35	31	35	30	27	29	26	23	20					20			
7	59	46	39	33	54	43	36	31	37	32	28	32	27	24	26	23	21	18					18			
8	54	42	35	29	50	39	32	28	34	29	25	29	25	22	24	21	19	16					16			
9	51	39	31	26	47	36	29	25	31	26	22	27	22	19	22	19	17	15					15			
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	13					13			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17069	17069	17069
5°	16924	16951	17070
10°	16828	16788	16775
15°	16562	16454	16319
20°	16302	15938	15716
25°	15862	15417	14984
30°	15424	14744	14187
35°	14918	14057	13387
40°	14383	13410	12626
45°	13843	12735	11885
50°	13359	12077	11164
55°	12760	11393	10482
60°	12077	10743	9802
65°	11350	10019	9125
70°	10547	9207	8255
75°	9596	8331	7477
80°	8576	7302	6770
85°	6595	5995	4956

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13843 cd/sqm



TEST NUMBER: P1439021

CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.2	2.0
10°-20°	256.9	5.6
20°-30°	369.4	8.0
30°-40°	415.2	9.0
40°-50°	401.1	8.7
50°-60°	338.9	7.4
60°-70°	243.4	5.3
70°-80°	133.0	2.9
80°-90°	35.4	0.8
90°-100°	34.9	0.8
100°-110°	144.0	3.1
110°-120°	261.4	5.7
120°-130°	355.7	7.7
130°-140°	410.7	8.9
140°-150°	413.8	9.0
150°-160°	357.1	7.8
160°-170°	242.0	5.3
170°-180°	85.4	1.9
0°-30°	718.4	15.7
0°-40°	1133.6	24.7
0°-60°	1873.5	40.8
0°-90°	2285.3	49.8
90°-120°	440.4	9.6
90°-150°	1620.6	35.3
90°-180°	2305.0	50.2
0°-180°	4590.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	980	980	980	980	980	
5°	968	981	970	970	976	92
15°	918	926	912	904	905	259
25°	825	826	802	784	780	380
35°	702	694	661	635	630	438
45°	562	550	517	490	482	434
55°	420	405	375	352	345	376
65°	275	265	243	226	221	273
75°	143	134	124	114	111	153
85°	33	31	30	26	25	39
90°	0	0	1	0	1	2
95°	34	30	28	22	22	39
105°	142	140	137	129	128	151
115°	271	270	265	257	257	267
125°	403	407	398	390	391	359
135°	536	543	534	524	527	413
145°	665	672	662	654	659	415
155°	778	785	774	769	776	358
165°	859	868	857	853	860	242
175°	900	910	898	893	895	85
180°	904	904	904	904	904	



TEST NUMBER: P1439021

CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	980.0	980.0	980.0	980.0	980.0
2.5°	973.4	985.1	976.4	977.6	979.4
5°	968.0	981.2	969.5	969.7	976.3
7.5°	961.1	973.6	958.8	956.1	962.3
10°	951.5	964.0	949.2	944.1	948.5
12.5°	938.9	950.8	936.6	928.5	932.3
15°	918.5	926.5	912.5	903.5	905.0
17.5°	896.3	901.3	881.0	873.4	872.0
20°	879.5	883.9	859.9	849.4	847.9
22.5°	857.8	861.7	836.5	823.6	821.5
25°	825.4	826.2	802.2	784.1	779.7
27.5°	791.5	789.2	762.5	741.1	735.4
30°	766.9	764.0	733.1	710.5	705.4
32.5°	740.5	735.2	704.3	679.9	674.8
35°	701.6	693.5	661.1	635.4	629.6
37.5°	660.2	651.1	619.2	591.3	584.7
40°	632.6	622.3	589.8	561.9	555.3
42.5°	605.0	593.5	560.4	532.5	525.3
45°	562.0	550.3	517.0	489.8	482.5
47.5°	521.2	506.3	473.9	446.9	439.6
50°	493.0	476.9	445.7	419.3	412.0
52.5°	464.2	447.5	417.5	392.3	385.0
55°	420.2	404.8	375.2	351.8	345.2
57.5°	376.7	361.9	334.8	312.5	306.0
60°	346.7	334.2	308.4	287.3	281.4
62.5°	317.9	306.6	282.0	262.7	256.8
65°	275.4	265.1	243.1	225.8	221.4
67.5°	234.1	223.8	206.1	190.5	185.5
70°	207.1	196.8	180.8	166.5	162.1
72.5°	181.3	170.4	157.4	144.3	141.1
75°	142.6	133.8	123.8	114.0	111.1
77.5°	108.4	99.8	92.6	85.7	84.9
80°	85.5	78.2	72.8	68.3	67.5
82.5°	63.9	58.4	54.8	51.5	51.3
85°	33.0	30.8	30.0	26.2	24.8
87.5°	9.6	9.6	8.5	7.2	7.3
90°	0.0	0.0	0.7	0.0	0.7
92.5°	8.5	7.4	6.9	4.5	5.2
95°	33.8	29.7	28.2	21.9	21.9
97.5°	63.9	59.7	57.5	51.0	49.6
100°	85.3	81.2	79.0	71.9	70.5
102.5°	107.3	105.4	101.5	93.9	92.5
105°	142.4	140.4	136.8	129.0	127.6
107.5°	178.5	178.9	173.6	167.2	165.3
110°	204.5	203.8	199.5	193.2	191.8

TEST NUMBER: P1439021

CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	231.0	229.7	225.5	219.1	217.7
115°	270.7	270.0	265.1	257.3	256.6
117.5°	308.5	310.7	304.9	296.7	296.4
120°	335.6	338.4	331.4	324.3	322.9
122.5°	362.1	365.4	358.4	350.3	350.5
125°	402.6	406.7	398.4	389.9	390.6
127.5°	441.6	446.7	439.0	430.4	431.2
130°	468.1	474.4	466.0	456.9	458.3
132.5°	495.2	501.4	493.1	483.4	485.9
135°	536.5	542.7	533.7	523.9	527.4
137.5°	575.5	581.7	571.8	563.6	567.7
140°	601.4	607.6	597.2	589.5	593.6
142.5°	626.8	634.1	623.1	614.9	620.2
145°	664.9	672.4	662.0	654.4	659.2
147.5°	701.0	708.5	698.0	690.6	695.6
150°	724.1	731.7	720.6	714.3	719.9
152.5°	745.5	754.2	742.6	736.4	743.5
155°	777.7	785.2	774.1	769.3	775.5
157.5°	805.6	814.4	803.3	799.2	804.2
160°	824.2	832.5	821.4	817.3	822.8
162.5°	838.3	847.1	836.6	832.0	838.6
165°	859.4	868.4	857.3	852.6	860.2
167.5°	876.1	885.6	874.4	869.5	877.2
170°	886.2	895.2	883.4	878.0	886.2
172.5°	893.0	902.5	890.2	884.7	890.2
175°	900.3	910.0	898.2	892.6	894.7
177.5°	903.9	911.6	902.2	897.2	903.9
180°	903.9	903.9	903.9	903.9	903.9



TEST NUMBER: P1439021
 CATALOG NUMBER: CB2-D-055U-055D-935-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.84	17.69	17.80	18.66	19.94	15.74	16.59	16.70	17.56	18.84
	3H	18.48	19.24	19.45	20.23	21.52	17.27	18.03	18.24	19.01	20.31
	4H	19.11	19.83	20.10	20.82	22.12	17.84	18.56	18.82	19.55	20.85
	6H	19.51	20.17	20.51	21.17	22.49	18.21	18.87	19.21	19.86	21.18
	8H	19.66	20.29	20.66	21.30	22.61	18.35	18.98	19.35	19.99	21.30
	12H	19.73	20.33	20.74	21.34	22.68	18.41	19.01	19.42	20.01	21.35
4H	2H	17.25	17.97	18.24	18.95	20.26	16.37	17.09	17.36	18.08	19.38
	3H	19.11	19.71	20.12	20.73	22.05	18.11	18.70	19.11	19.72	21.04
	4H	19.86	20.41	20.87	21.42	22.76	18.78	19.33	19.79	20.34	21.68
	6H	20.38	20.85	21.40	21.88	23.22	19.25	19.72	20.27	20.76	22.10
	8H	20.58	21.02	21.60	22.05	23.40	19.44	19.88	20.46	20.91	22.26
	12H	20.69	21.09	21.73	22.13	23.49	19.53	19.93	20.57	20.97	22.33
8H	4H	20.01	20.45	21.04	21.48	22.84	19.05	19.49	20.07	20.52	21.87
	6H	20.66	21.02	21.70	22.09	23.44	19.66	20.02	20.70	21.09	22.44
	8H	20.95	21.27	22.00	22.32	23.69	19.93	20.25	20.98	21.30	22.67
	12H	21.12	21.40	22.18	22.45	23.86	20.08	20.36	21.14	21.41	22.82
12H	4H	19.99	20.39	21.03	21.43	22.79	19.05	19.45	20.09	20.49	21.85
	6H	20.68	21.00	21.74	22.06	23.43	19.72	20.04	20.77	21.09	22.46
	8H	21.00	21.28	22.06	22.33	23.74	20.02	20.31	21.08	21.35	22.77