

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438660

Luminaire Tested: CB2-055U-055D-840-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438660
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-055U-055D-840-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 550 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9515.6 lumens
Efficiency: N/A
Efficacy: 127.6 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 74.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

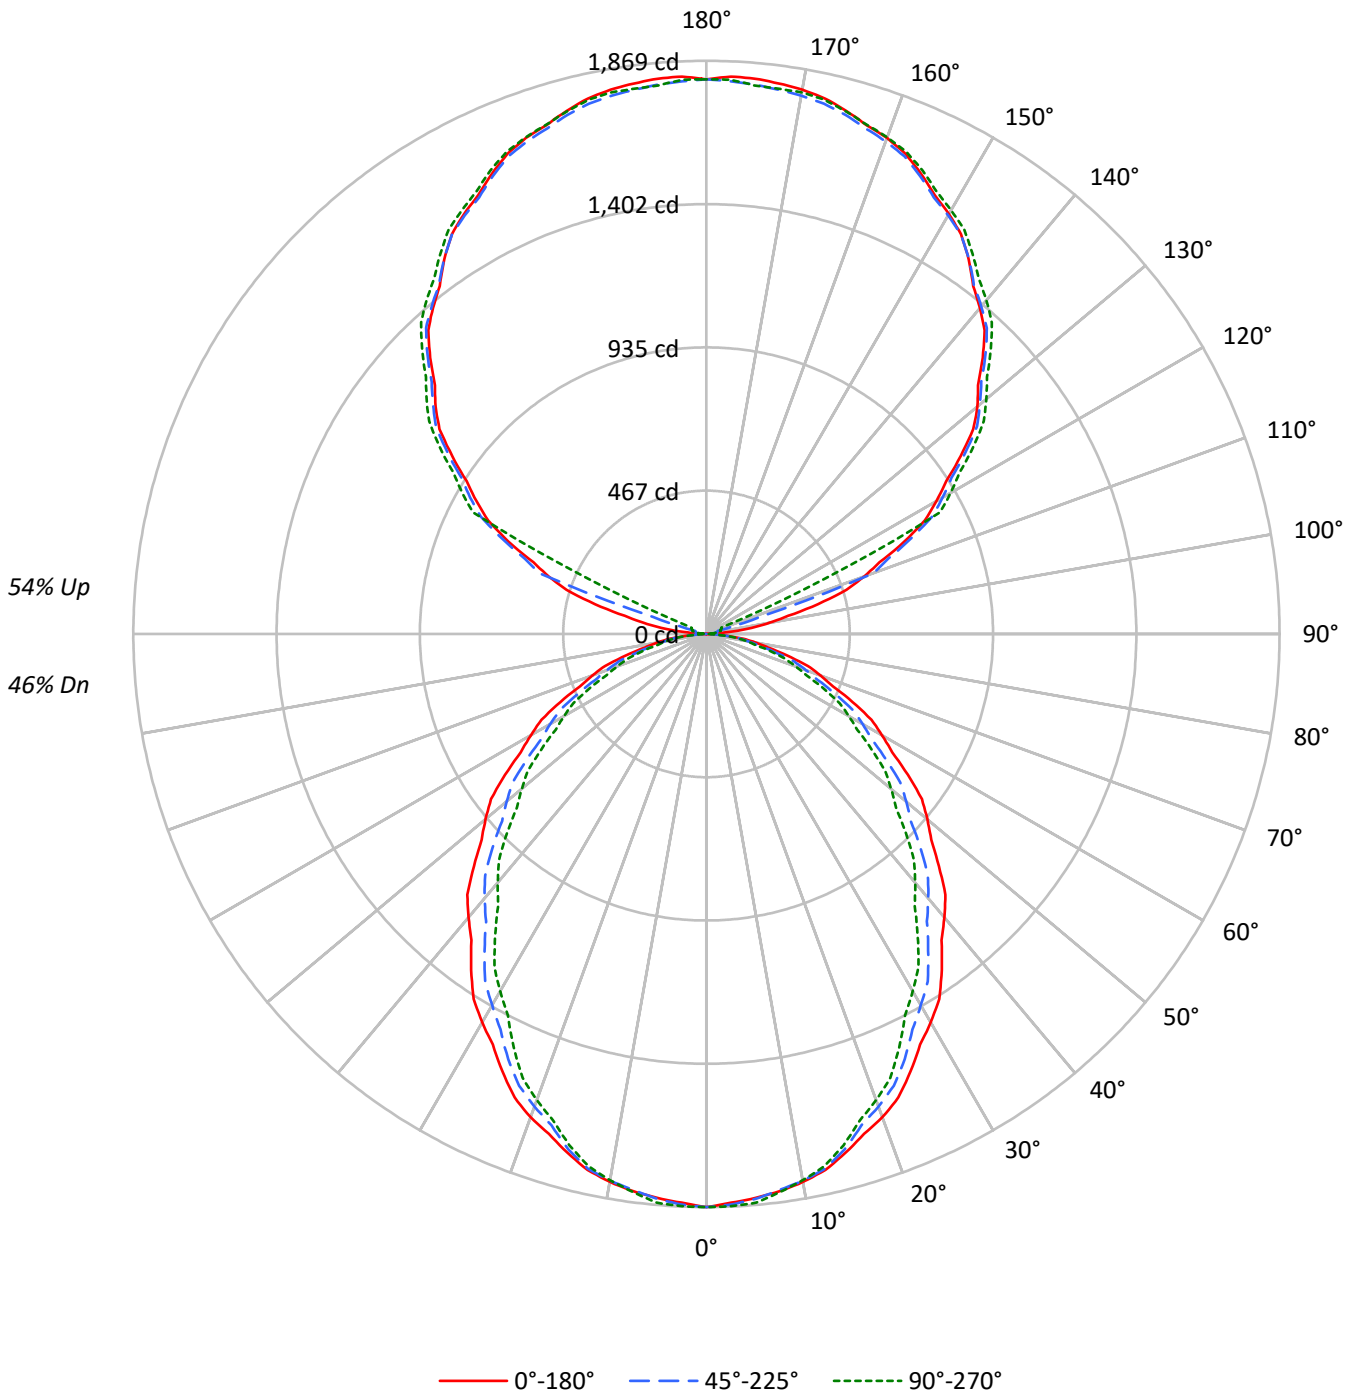



TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46				
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39				
2	88	81	75	70	81	75	70	65	63	59	56	51	49	46	41	39	38	33				
3	81	72	64	59	74	66	60	55	55	51	47	46	42	39	37	34	32	28				
4	74	63	56	50	68	58	52	46	49	44	40	41	37	34	33	30	28	24				
5	68	57	49	43	62	52	45	40	44	39	35	37	33	29	30	27	24	21				
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19				
7	58	46	38	33	53	42	36	31	36	31	27	30	26	23	25	22	19	17				
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15				
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	14				
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16277	16277	16277
5°	16138	16164	16277
10°	16047	16009	15996
15°	15793	15689	15561
20°	15544	15199	14988
25°	15126	14701	14288
30°	14708	14060	13527
35°	14226	13404	12765
40°	13715	12788	12039
45°	13201	12143	11333
50°	12738	11517	10645
55°	12168	10865	9995
60°	11516	10245	9348
65°	10823	9555	8700
70°	10058	8782	7870
75°	9149	7944	7127
80°	8180	6961	6459
85°	6295	5715	4716

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13201 cd/sqm



TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	175.8	1.8
10°-20°	489.9	5.1
20°-30°	704.5	7.4
30°-40°	791.8	8.3
40°-50°	764.9	8.0
50°-60°	646.3	6.8
60°-70°	464.2	4.9
70°-80°	253.7	2.7
80°-90°	67.5	0.7
90°-100°	31.5	0.3
100°-110°	200.6	2.1
110°-120°	637.4	6.7
120°-130°	924.9	9.7
130°-140°	994.8	10.5
140°-150°	936.6	9.8
150°-160°	763.0	8.0
160°-170°	496.6	5.2
170°-180°	171.7	1.8
0°-30°	1370.2	14.4
0°-40°	2162.0	22.7
0°-60°	3573.1	37.5
0°-90°	4358.5	45.8
90°-120°	869.5	9.1
90°-150°	3725.8	39.2
90°-180°	5157.0	54.2
0°-180°	9515.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1869	1869	1869	1869	1869	
5°	1846	1871	1849	1849	1862	175
15°	1752	1767	1740	1723	1726	494
25°	1574	1576	1530	1495	1487	725
35°	1338	1323	1261	1212	1201	836
45°	1072	1050	986	934	920	828
55°	801	772	716	671	658	716
65°	525	506	464	431	422	521
75°	272	255	236	217	212	291
85°	63	59	57	50	47	75
90°	0	0	0	1	1	5
95°	72	21	22	14	13	91
105°	377	391	39	46	48	397
115°	713	728	735	744	426	701
125°	1012	1030	1030	1048	1062	905
135°	1274	1289	1287	1295	1312	982
145°	1491	1502	1492	1494	1513	932
155°	1656	1666	1648	1644	1667	763
165°	1766	1771	1752	1745	1763	499
175°	1818	1822	1798	1787	1796	173
180°	1809	1809	1809	1809	1809	



TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1869.0	1869.0	1869.0	1869.0	1869.0
2.5°	1856.4	1878.8	1862.2	1864.5	1867.9
5°	1846.1	1871.3	1849.0	1849.3	1861.9
7.5°	1833.0	1856.8	1828.7	1823.5	1835.3
10°	1814.6	1838.4	1810.4	1800.5	1808.9
12.5°	1790.6	1813.3	1786.3	1770.7	1778.0
15°	1751.7	1767.1	1740.2	1723.1	1725.9
17.5°	1709.3	1718.8	1680.1	1665.7	1662.9
20°	1677.3	1685.7	1640.0	1620.0	1617.2
22.5°	1636.0	1643.3	1595.4	1570.7	1566.8
25°	1574.2	1575.6	1529.9	1495.3	1486.9
27.5°	1509.5	1505.1	1454.3	1413.4	1402.5
30°	1462.6	1457.0	1398.2	1355.0	1345.2
32.5°	1412.2	1402.1	1343.2	1296.6	1286.9
35°	1338.1	1322.7	1260.8	1211.9	1200.7
37.5°	1259.1	1241.7	1181.0	1127.7	1115.1
40°	1206.4	1186.8	1124.9	1071.6	1059.0
42.5°	1153.8	1131.9	1068.8	1015.5	1001.8
45°	1071.9	1049.5	986.0	934.2	920.2
47.5°	994.0	965.5	903.9	852.3	838.3
50°	940.2	909.5	850.1	799.7	785.7
52.5°	885.3	853.4	796.3	748.2	734.2
55°	801.4	772.0	715.6	670.9	658.3
57.5°	718.4	690.2	638.6	595.9	583.6
60°	661.2	637.4	588.2	547.9	536.7
62.5°	606.2	584.7	537.8	500.9	489.7
65°	525.2	505.6	463.7	430.6	422.2
67.5°	446.5	426.9	393.0	363.3	353.8
70°	395.0	375.4	344.9	317.5	309.1
72.5°	345.8	325.0	300.2	275.2	269.0
75°	271.9	255.1	236.1	217.4	211.8
77.5°	206.7	190.4	176.6	163.4	162.0
80°	163.1	149.2	138.8	130.2	128.8
82.5°	121.9	111.3	104.5	98.2	97.9
85°	63.0	58.8	57.2	50.0	47.2
87.5°	18.3	18.3	16.0	14.0	14.0
90°	0.0	0.0	0.0	1.3	1.3
92.5°	19.9	7.6	5.2	7.6	7.6
95°	71.9	20.8	22.2	14.4	13.1
97.5°	149.3	33.5	32.2	35.3	36.6
100°	207.9	68.6	35.3	40.6	41.8
102.5°	272.8	258.2	36.4	43.7	46.0
105°	376.6	390.7	39.2	45.8	48.4
107.5°	478.6	492.7	182.6	47.4	50.0
110°	546.6	560.7	578.0	48.4	51.0



TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	610.5	627.6	640.8	107.8	53.1
115°	712.7	728.1	735.0	743.5	426.3
117.5°	803.0	821.9	829.7	844.4	858.7
120°	865.7	883.6	889.3	904.0	919.4
122.5°	927.5	943.3	946.8	963.6	978.0
125°	1012.2	1030.1	1030.5	1047.8	1061.9
127.5°	1097.0	1112.3	1111.6	1124.5	1140.1
130°	1153.5	1163.7	1163.9	1174.8	1191.4
132.5°	1200.5	1214.9	1215.2	1223.9	1240.6
135°	1273.8	1289.1	1286.8	1295.1	1311.7
137.5°	1342.6	1357.4	1353.3	1360.2	1377.3
140°	1387.5	1400.3	1394.1	1401.1	1420.2
142.5°	1429.4	1442.2	1432.8	1438.7	1458.9
145°	1490.9	1502.4	1492.2	1493.9	1513.1
147.5°	1545.5	1556.8	1544.5	1546.2	1564.1
150°	1581.1	1591.3	1575.9	1577.6	1595.5
152.5°	1612.5	1621.7	1605.2	1604.9	1625.8
155°	1655.6	1665.9	1647.8	1644.4	1667.4
157.5°	1694.9	1704.3	1686.2	1683.8	1701.7
160°	1721.0	1727.4	1709.3	1705.7	1723.6
162.5°	1738.8	1746.2	1728.1	1722.5	1740.4
165°	1765.5	1770.6	1752.4	1745.0	1762.9
167.5°	1788.5	1794.4	1771.0	1764.4	1783.5
170°	1802.1	1805.9	1782.5	1773.8	1793.0
172.5°	1810.5	1813.3	1789.8	1779.9	1793.0
175°	1817.8	1821.6	1798.2	1786.6	1795.6
177.5°	1819.1	1821.2	1803.4	1793.3	1808.6
180°	1808.6	1808.6	1808.6	1808.6	1808.6

TEST NUMBER: P1438660

CATALOG NUMBER: CB2-055U-055D-840-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.29	17.11	17.29	18.11	19.44	15.19	16.01	16.19	17.01	18.34
	3H	17.93	18.66	18.94	19.68	21.03	16.72	17.45	17.72	18.46	19.81
	4H	18.56	19.25	19.58	20.27	21.63	17.29	17.98	18.30	18.99	20.35
	6H	18.96	19.60	19.99	20.62	21.99	17.66	18.29	18.68	19.31	20.69
	8H	19.11	19.71	20.14	20.75	22.12	17.79	18.40	18.83	19.44	20.81
	12H	19.18	19.75	20.22	20.79	22.18	17.86	18.43	18.89	19.46	20.85
4H	2H	16.69	17.39	17.72	18.40	19.76	15.82	16.51	16.84	17.53	18.89
	3H	18.56	19.14	19.59	20.18	21.55	17.55	18.13	18.58	19.17	20.54
	4H	19.30	19.83	20.34	20.87	22.26	18.22	18.75	19.26	19.79	21.18
	6H	19.82	20.27	20.87	21.33	22.73	18.70	19.15	19.75	20.21	21.60
	8H	20.02	20.45	21.08	21.50	22.91	18.88	19.31	19.93	20.36	21.77
	12H	20.13	20.51	21.20	21.58	22.99	18.97	19.35	20.04	20.42	21.83
8H	4H	19.46	19.88	20.51	20.93	22.34	18.49	18.92	19.54	19.97	21.37
	6H	20.10	20.45	21.17	21.54	22.94	19.10	19.44	20.17	20.54	21.94
	8H	20.39	20.69	21.47	21.77	23.20	19.37	19.68	20.45	20.76	22.18
	12H	20.56	20.83	21.64	21.90	23.37	19.52	19.79	20.60	20.86	22.33
12H	4H	19.43	19.82	20.50	20.88	22.30	18.49	18.88	19.56	19.94	21.36
	6H	20.12	20.43	21.21	21.51	22.93	19.16	19.46	20.24	20.54	21.97
	8H	20.44	20.71	21.52	21.78	23.25	19.46	19.73	20.55	20.81	22.27