

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438688

Luminaire Tested: CB2-055U-120D-840-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438688
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-055U-120D-840-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
2-INCH APERTURE
DOWNLIGHT 1200 LUMENS PER FOOT
UPLIGHT 550 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14627.4 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 126.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

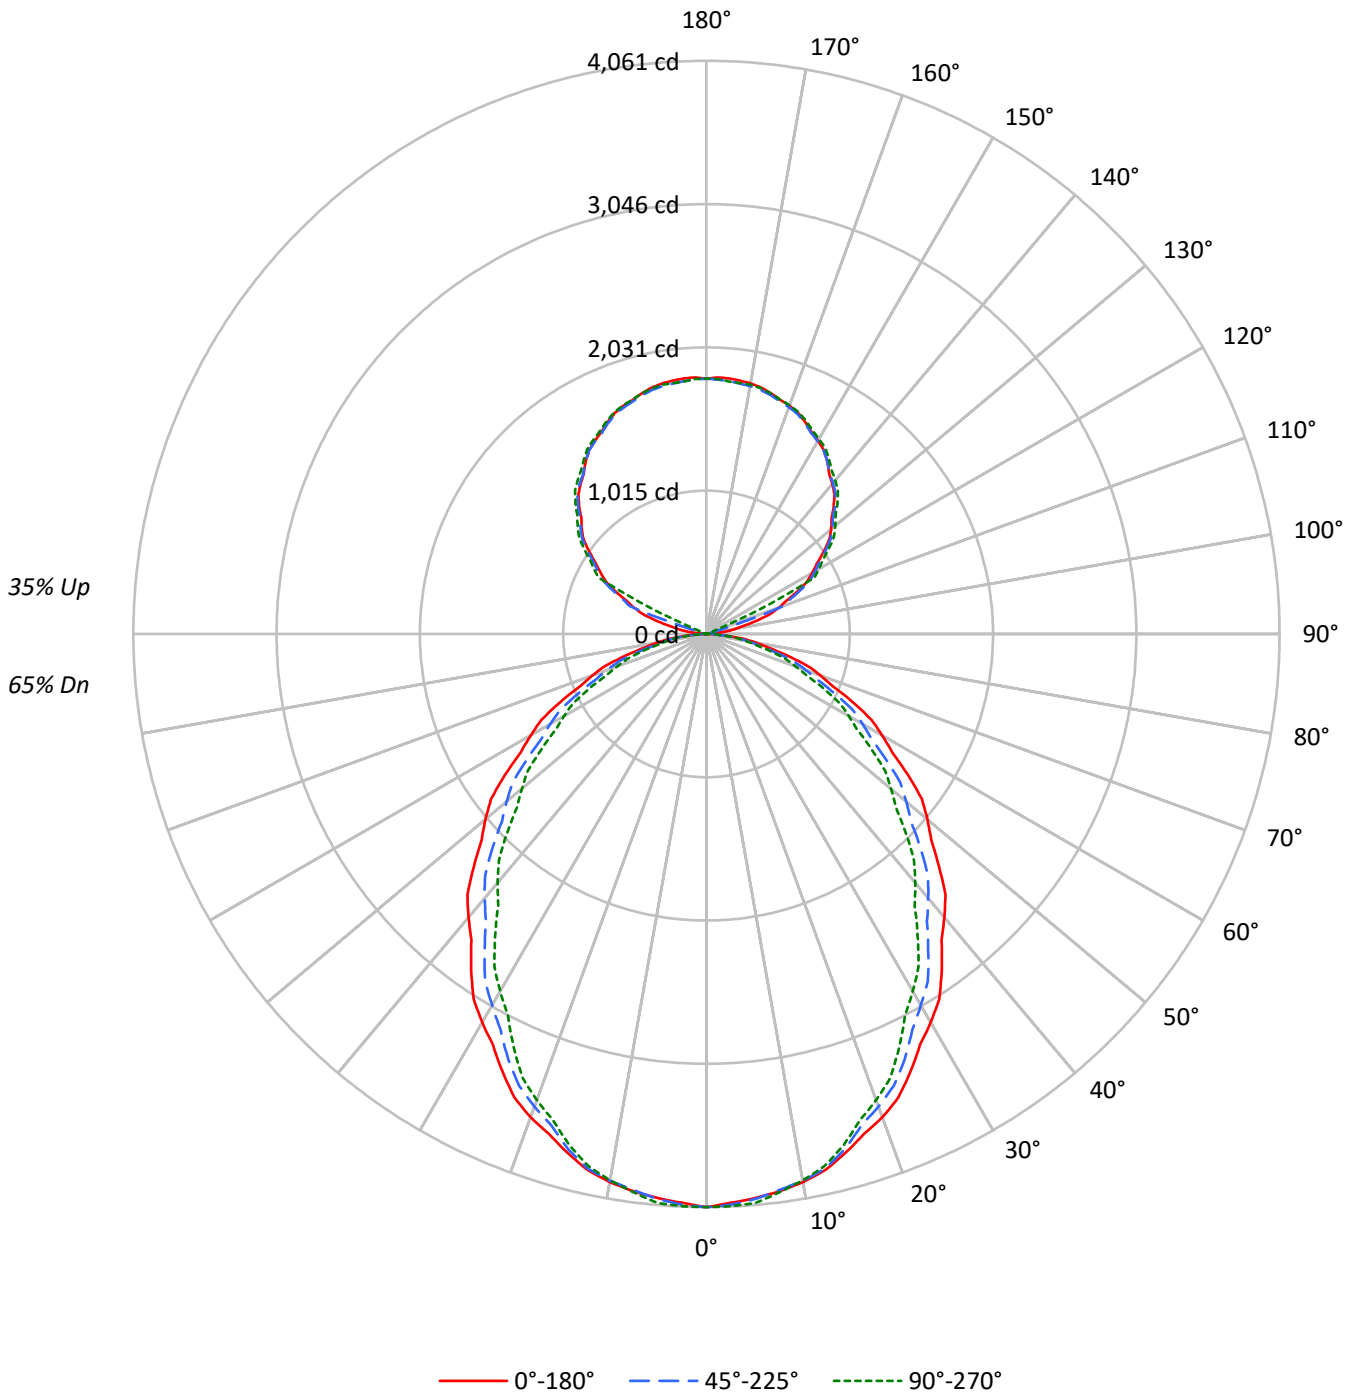



TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65
1	101	97	93	90	95	91	88	85	81	78	76	71	69	67	62	61	59	55
2	92	85	79	74	87	80	75	70	71	67	63	63	59	57	55	52	50	46
3	85	75	68	62	79	71	64	59	63	58	53	56	52	48	49	46	43	40
4	78	67	59	52	73	63	56	50	56	50	46	50	45	42	44	40	37	34
5	71	60	51	45	67	56	49	43	50	44	40	45	40	36	40	36	33	30
6	66	54	45	39	62	51	43	38	46	39	35	41	36	32	36	32	29	26
7	61	49	40	35	57	46	39	34	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	28	34	29	25	30	26	23	21
9	53	41	33	28	50	39	32	27	35	29	25	31	27	23	28	24	21	19
10	50	37	30	25	47	36	29	24	32	27	23	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	35368	35368	35368
5°	35067	35122	35366
10°	34868	34786	34758
15°	34316	34092	33811
20°	33776	33026	32565
25°	32868	31942	31046
30°	31958	30551	29393
35°	30911	29126	27737
40°	29801	27787	26160
45°	28685	26387	24626
50°	27679	25025	23130
55°	26440	23607	21718
60°	25022	22261	20310
65°	23516	20761	18902
70°	21854	19082	17103
75°	19879	17265	15485
80°	17779	15126	14037
85°	13669	12430	10252

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28685 cd/sqm



TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	381.9	2.6
10°-20°	1064.6	7.3
20°-30°	1530.7	10.5
30°-40°	1720.5	11.8
40°-50°	1662.0	11.4
50°-60°	1404.2	9.6
60°-70°	1008.6	6.9
70°-80°	551.3	3.8
80°-90°	146.5	1.0
90°-100°	31.5	0.2
100°-110°	200.6	1.4
110°-120°	637.4	4.4
120°-130°	924.9	6.3
130°-140°	994.8	6.8
140°-150°	936.6	6.4
150°-160°	763.0	5.2
160°-170°	496.6	3.4
170°-180°	171.7	1.2
0°-30°	2977.2	20.4
0°-40°	4697.7	32.1
0°-60°	7763.9	53.1
0°-90°	9470.3	64.7
90°-120°	869.5	5.9
90°-150°	3725.8	25.5
90°-180°	5157.0	35.3
0°-180°	14627.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4061	4061	4061	4061	4061	
5°	4011	4066	4018	4018	4046	381
15°	3806	3840	3781	3744	3750	1073
25°	3421	3424	3324	3249	3231	1575
35°	2908	2874	2740	2633	2609	1816
45°	2329	2280	2142	2030	2000	1799
55°	1741	1678	1555	1458	1430	1557
65°	1141	1099	1008	936	917	1132
75°	591	554	513	472	460	632
85°	137	128	124	109	103	163
90°	0	0	0	1	1	8
95°	72	21	22	14	13	91
105°	377	391	39	46	48	397
115°	713	728	735	744	426	701
125°	1012	1030	1030	1048	1062	905
135°	1274	1289	1287	1295	1312	982
145°	1491	1502	1492	1494	1513	932
155°	1656	1666	1648	1644	1667	763
165°	1766	1771	1752	1745	1763	499
175°	1818	1822	1798	1787	1796	173
180°	1809	1809	1809	1809	1809	



TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4061.2	4061.2	4061.2	4061.2	4061.2
2.5°	4033.8	4082.4	4046.2	4051.4	4058.7
5°	4011.4	4066.1	4017.6	4018.3	4045.6
7.5°	3982.8	4034.5	3973.5	3962.2	3987.8
10°	3943.0	3994.7	3933.7	3912.3	3930.6
12.5°	3890.8	3940.0	3881.4	3847.6	3863.4
15°	3806.2	3839.6	3781.3	3744.1	3750.2
17.5°	3714.1	3734.8	3650.7	3619.5	3613.4
20°	3644.5	3662.7	3563.6	3520.0	3513.9
22.5°	3554.9	3570.7	3466.6	3412.9	3404.4
25°	3420.6	3423.6	3324.2	3249.1	3230.9
27.5°	3280.0	3270.3	3160.0	3071.1	3047.4
30°	3178.0	3165.9	3038.1	2944.3	2923.0
32.5°	3068.6	3046.7	2918.7	2817.5	2796.2
35°	2907.5	2874.0	2739.6	2633.3	2609.0
37.5°	2735.8	2698.1	2566.1	2450.4	2423.0
40°	2621.4	2578.8	2444.2	2328.5	2301.1
42.5°	2507.0	2459.5	2322.3	2206.5	2176.7
45°	2329.1	2280.5	2142.5	2029.9	1999.5
47.5°	2159.9	2097.9	1964.0	1852.0	1821.6
50°	2043.0	1976.1	1847.1	1737.6	1707.2
52.5°	1923.6	1854.3	1730.2	1625.6	1595.2
55°	1741.4	1677.5	1554.8	1457.8	1430.4
57.5°	1561.0	1499.6	1387.5	1294.9	1268.1
60°	1436.6	1385.0	1278.1	1190.4	1166.1
62.5°	1317.2	1270.4	1168.6	1088.4	1064.1
65°	1141.2	1098.7	1007.5	935.6	917.3
67.5°	970.2	927.6	853.9	789.4	768.7
70°	858.3	815.7	749.4	689.9	671.7
72.5°	751.3	706.3	652.4	598.0	584.6
75°	590.8	554.3	513.1	472.4	460.2
77.5°	449.0	413.8	383.7	355.0	352.0
80°	354.5	324.1	301.6	282.9	279.9
82.5°	264.9	241.8	227.0	213.3	212.7
85°	136.8	127.7	124.4	108.7	102.6
87.5°	39.8	39.8	34.8	30.1	30.1
90°	0.0	0.0	0.0	1.3	1.3
92.5°	19.9	7.6	5.2	7.6	7.6
95°	71.9	20.8	22.2	14.4	13.1
97.5°	149.3	33.5	32.2	35.3	36.6
100°	207.9	68.6	35.3	40.6	41.8
102.5°	272.8	258.2	36.4	43.7	46.0
105°	376.6	390.7	39.2	45.8	48.4
107.5°	478.6	492.7	182.6	47.4	50.0
110°	546.6	560.7	578.0	48.4	51.0



TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	610.5	627.6	640.8	107.8	53.1
115°	712.7	728.1	735.0	743.5	426.3
117.5°	803.0	821.9	829.7	844.4	858.7
120°	865.7	883.6	889.3	904.0	919.4
122.5°	927.5	943.3	946.8	963.6	978.0
125°	1012.2	1030.1	1030.5	1047.8	1061.9
127.5°	1097.0	1112.3	1111.6	1124.5	1140.1
130°	1153.5	1163.7	1163.9	1174.8	1191.4
132.5°	1200.5	1214.9	1215.2	1223.9	1240.6
135°	1273.8	1289.1	1286.8	1295.1	1311.7
137.5°	1342.6	1357.4	1353.3	1360.2	1377.3
140°	1387.5	1400.3	1394.1	1401.1	1420.2
142.5°	1429.4	1442.2	1432.8	1438.7	1458.9
145°	1490.9	1502.4	1492.2	1493.9	1513.1
147.5°	1545.5	1556.8	1544.5	1546.2	1564.1
150°	1581.1	1591.3	1575.9	1577.6	1595.5
152.5°	1612.5	1621.7	1605.2	1604.9	1625.8
155°	1655.6	1665.9	1647.8	1644.4	1667.4
157.5°	1694.9	1704.3	1686.2	1683.8	1701.7
160°	1721.0	1727.4	1709.3	1705.7	1723.6
162.5°	1738.8	1746.2	1728.1	1722.5	1740.4
165°	1765.5	1770.6	1752.4	1745.0	1762.9
167.5°	1788.5	1794.4	1771.0	1764.4	1783.5
170°	1802.1	1805.9	1782.5	1773.8	1793.0
172.5°	1810.5	1813.3	1789.8	1779.9	1793.0
175°	1817.8	1821.6	1798.2	1786.6	1795.6
177.5°	1819.1	1821.2	1803.4	1793.3	1808.6
180°	1808.6	1808.6	1808.6	1808.6	1808.6



TEST NUMBER: P1438688

CATALOG NUMBER: CB2-055U-120D-840-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.65	21.65	21.48	22.49	23.54	19.55	20.55	20.38	21.39	22.44
	3H	22.31	23.20	23.14	24.05	25.13	21.09	21.98	21.93	22.84	23.91
	4H	22.94	23.79	23.80	24.65	25.73	21.67	22.51	22.52	23.37	24.46
	6H	23.35	24.13	24.22	25.00	26.09	22.05	22.83	22.91	23.69	24.79
	8H	23.51	24.25	24.38	25.13	26.23	22.19	22.93	23.07	23.82	24.92
	12H	23.58	24.29	24.46	25.17	26.29	22.26	22.97	23.14	23.84	24.97
4H	2H	21.08	21.92	21.94	22.78	23.87	20.20	21.05	21.06	21.91	22.99
	3H	22.96	23.66	23.83	24.56	25.65	21.95	22.65	22.82	23.55	24.65
	4H	23.71	24.35	24.59	25.24	26.37	22.63	23.27	23.51	24.16	25.29
	6H	24.24	24.79	25.13	25.70	26.83	23.11	23.67	24.01	24.58	25.71
	8H	24.45	24.96	25.34	25.87	27.01	23.31	23.82	24.20	24.73	25.87
	12H	24.56	25.02	25.48	25.95	27.10	23.40	23.87	24.32	24.79	25.94
8H	4H	23.88	24.39	24.78	25.30	26.44	22.91	23.43	23.81	24.34	25.48
	6H	24.53	24.95	25.45	25.90	27.04	23.52	23.95	24.45	24.90	26.04
	8H	24.82	25.20	25.75	26.14	27.30	23.80	24.18	24.74	25.12	26.28
	12H	25.00	25.33	25.94	26.26	27.47	23.96	24.29	24.89	25.22	26.43
12H	4H	23.86	24.33	24.78	25.26	26.40	22.92	23.39	23.84	24.32	25.46
	6H	24.56	24.93	25.49	25.88	27.03	23.59	23.97	24.52	24.91	26.07
	8H	24.88	25.21	25.82	26.15	27.35	23.90	24.23	24.84	25.17	26.38