

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438645

Luminaire Tested: CB2-055U-030D-840-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438645
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-055U-030D-840-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
2-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 550 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3719.3 lumens
Efficiency: N/A
Efficacy: 144.7 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 25.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438645

CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

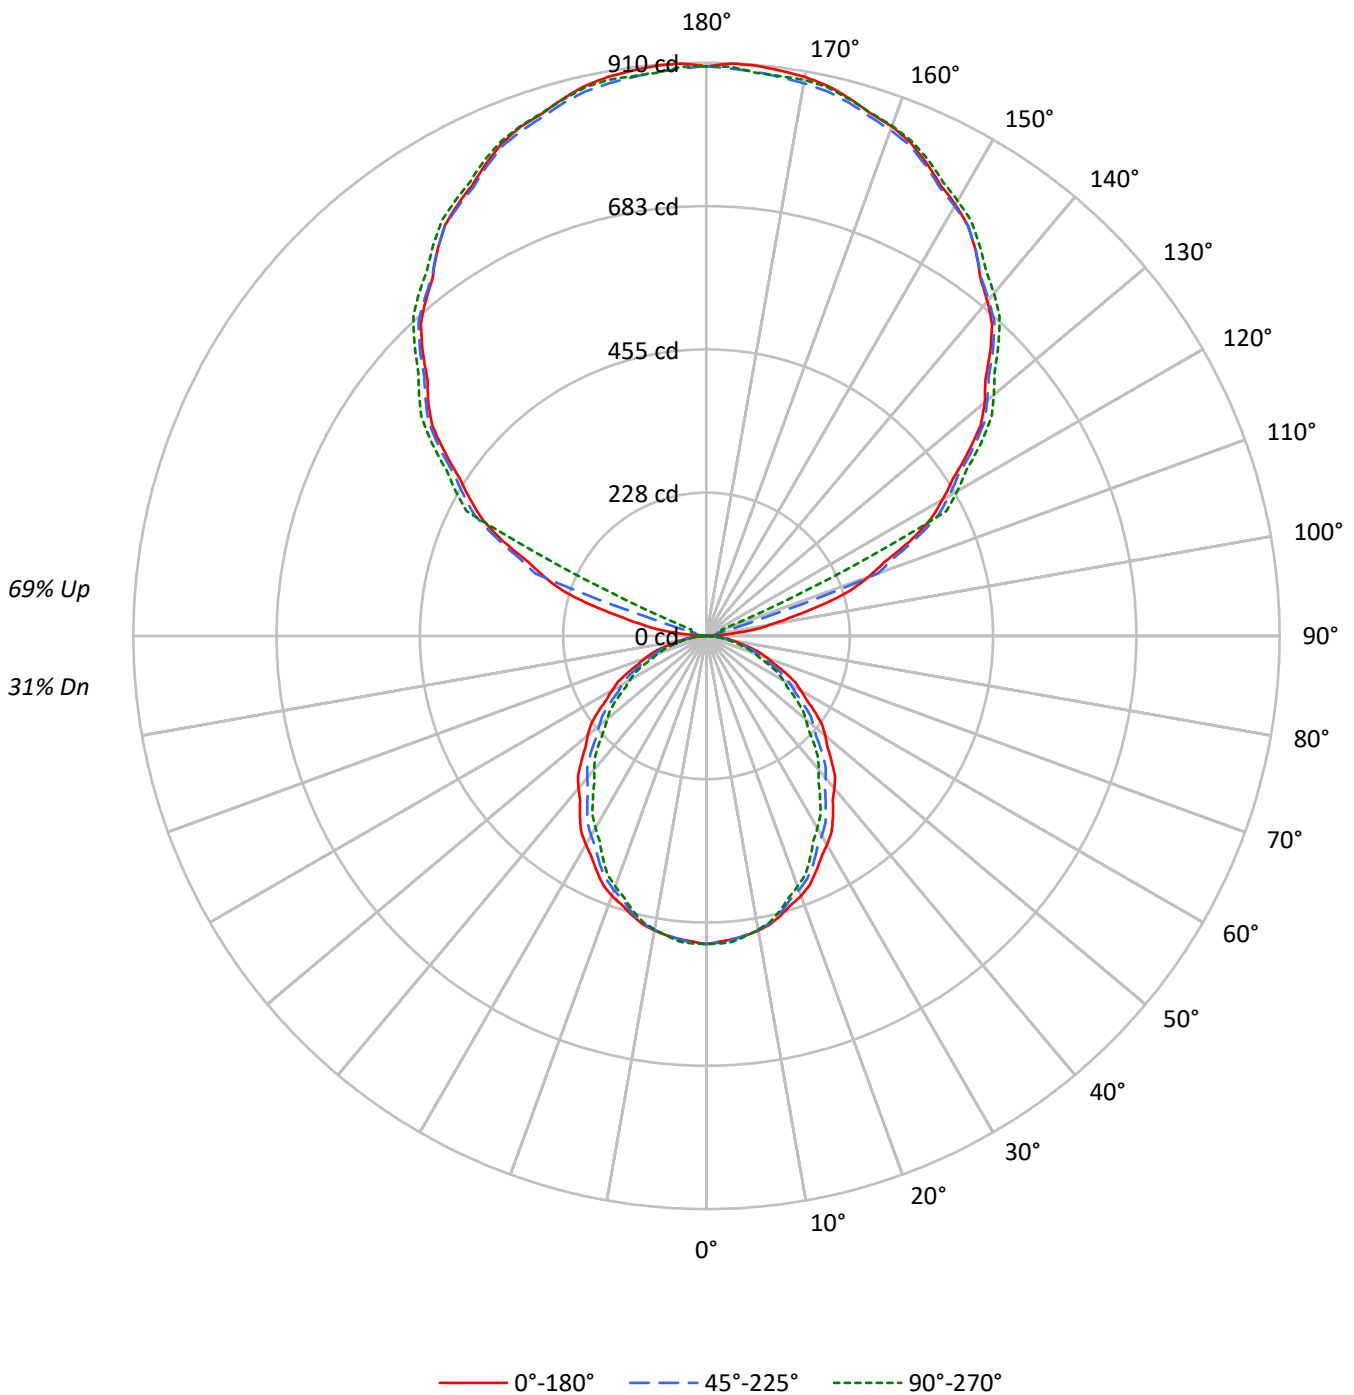



TEST NUMBER: P1438645

CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31																				
1	94	89	86	82	84	80	77	75	64	62	60	48	47	46	34	33	33	26																				
2	85	78	72	67	76	70	65	61	56	52	50	42	40	38	30	29	28	22																				
3	78	69	62	56	70	62	56	51	49	45	42	38	35	32	27	25	24	19																				
4	71	61	53	47	64	55	48	43	44	39	36	34	30	28	24	22	20	16																				
5	65	54	46	41	58	49	42	37	39	34	31	30	27	24	22	20	18	14																				
6	60	48	41	35	54	44	37	32	35	30	27	27	24	21	20	17	16	12																				
7	55	44	36	31	50	40	33	28	32	27	23	25	21	19	18	16	14	11																				
8	51	40	32	27	46	36	29	25	29	24	21	23	19	17	16	14	13	10																				
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11	9																				
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8521	8521	8521
5°	8448	8460	8520
10°	8399	8380	8373
15°	8268	8213	8145
20°	8137	7957	7846
25°	7918	7695	7480
30°	7699	7359	7081
35°	7446	7017	6683
40°	7180	6694	6303
45°	6909	6357	5931
50°	6668	6029	5571
55°	6371	5688	5232
60°	6026	5361	4894
65°	5667	5003	4554
70°	5266	4599	4120
75°	4791	4159	3728
80°	4283	3641	3380
85°	3297	2998	2478

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6909 cd/sqm



TEST NUMBER: P1438645

CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.0	1.2
10°-20°	128.2	3.4
20°-30°	184.4	5.0
30°-40°	207.2	5.6
40°-50°	200.2	5.4
50°-60°	169.1	4.5
60°-70°	121.5	3.3
70°-80°	66.4	1.8
80°-90°	17.7	0.5
90°-100°	15.8	0.4
100°-110°	100.3	2.7
110°-120°	318.7	8.6
120°-130°	462.5	12.4
130°-140°	497.4	13.4
140°-150°	468.3	12.6
150°-160°	381.5	10.3
160°-170°	248.3	6.7
170°-180°	85.8	2.3
0°-30°	358.6	9.6
0°-40°	565.9	15.2
0°-60°	935.2	25.1
0°-90°	1140.8	30.7
90°-120°	434.8	11.7
90°-150°	1862.9	50.1
90°-180°	2579.0	69.3
0°-180°	3719.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	489	489	489	489	489	
5°	483	490	484	484	487	46
15°	458	462	456	451	452	129
25°	412	412	400	391	389	190
35°	350	346	330	317	314	219
45°	280	275	258	244	241	217
55°	210	202	187	176	172	188
65°	138	132	121	113	110	136
75°	71	67	62	57	55	76
85°	16	15	15	13	12	20
90°	0	0	0	1	1	2
95°	36	10	11	7	6	46
105°	188	195	20	23	24	198
115°	356	364	368	372	213	350
125°	506	515	515	524	531	452
135°	637	645	643	648	656	491
145°	745	751	746	747	756	466
155°	828	833	824	822	834	382
165°	883	885	876	872	881	249
175°	909	911	899	893	898	86
180°	904	904	904	904	904	



TEST NUMBER: P1438645

CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	489.2	489.2	489.2	489.2	489.2
2.5°	485.9	491.7	487.4	488.0	488.9
5°	483.2	489.8	483.9	484.0	487.3
7.5°	479.7	486.0	478.6	477.3	480.3
10°	474.9	481.2	473.8	471.3	473.4
12.5°	468.7	474.6	467.5	463.5	465.4
15°	458.5	462.5	455.5	451.0	451.7
17.5°	447.4	449.9	439.7	436.0	435.2
20°	439.0	441.2	429.3	424.0	423.3
22.5°	428.2	430.1	417.6	411.1	410.1
25°	412.0	412.4	400.4	391.4	389.2
27.5°	395.1	393.9	380.6	369.9	367.1
30°	382.8	381.3	365.9	354.7	352.1
32.5°	369.6	367.0	351.6	339.4	336.8
35°	350.2	346.2	330.0	317.2	314.3
37.5°	329.5	325.0	309.1	295.2	291.9
40°	315.8	310.6	294.4	280.5	277.2
42.5°	302.0	296.3	279.7	265.8	262.2
45°	280.5	274.7	258.1	244.5	240.8
47.5°	260.2	252.7	236.6	223.1	219.4
50°	246.1	238.0	222.5	209.3	205.6
52.5°	231.7	223.4	208.4	195.8	192.2
55°	209.8	202.1	187.3	175.6	172.3
57.5°	188.0	180.6	167.1	156.0	152.7
60°	173.0	166.8	153.9	143.4	140.5
62.5°	158.7	153.0	140.8	131.1	128.2
65°	137.5	132.3	121.4	112.7	110.5
67.5°	116.9	111.7	102.9	95.1	92.6
70°	103.4	98.3	90.3	83.1	80.9
72.5°	90.5	85.1	78.6	72.0	70.4
75°	71.2	66.8	61.8	56.9	55.4
77.5°	54.1	49.8	46.2	42.8	42.4
80°	42.7	39.0	36.3	34.1	33.7
82.5°	31.9	29.1	27.3	25.7	25.6
85°	16.5	15.4	15.0	13.1	12.4
87.5°	4.8	4.8	4.2	3.7	3.7
90°	0.0	0.0	0.0	0.7	0.7
92.5°	9.9	3.8	2.6	3.8	3.8
95°	36.0	10.4	11.1	7.2	6.5
97.5°	74.7	16.7	16.1	17.7	18.3
100°	104.0	34.3	17.7	20.3	20.9
102.5°	136.4	129.1	18.2	21.9	23.0
105°	188.3	195.4	19.6	22.9	24.2
107.5°	239.3	246.4	91.3	23.7	25.0
110°	273.3	280.4	289.0	24.2	25.5



TEST NUMBER: P1438645

CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	305.2	313.8	320.4	53.9	26.5
115°	356.4	364.0	367.5	371.7	213.2
117.5°	401.5	410.9	414.8	422.2	429.3
120°	432.9	441.8	444.6	452.0	459.7
122.5°	463.7	471.7	473.4	481.8	489.0
125°	506.1	515.1	515.3	523.9	531.0
127.5°	548.5	556.2	555.8	562.3	570.1
130°	576.7	581.8	582.0	587.4	595.7
132.5°	600.3	607.4	607.6	612.0	620.3
135°	636.9	644.6	643.4	647.5	655.8
137.5°	671.3	678.7	676.6	680.1	688.7
140°	693.8	700.2	697.0	700.5	710.1
142.5°	714.7	721.1	716.4	719.4	729.5
145°	745.4	751.2	746.1	747.0	756.5
147.5°	772.8	778.4	772.2	773.1	782.0
150°	790.5	795.7	787.9	788.8	797.7
152.5°	806.2	810.8	802.6	802.4	812.9
155°	827.8	832.9	823.9	822.2	833.7
157.5°	847.4	852.2	843.1	841.9	850.8
160°	860.5	863.7	854.6	852.9	861.8
162.5°	869.4	873.1	864.0	861.2	870.2
165°	882.7	885.3	876.2	872.5	881.4
167.5°	894.3	897.2	885.5	882.2	891.8
170°	901.1	903.0	891.2	886.9	896.5
172.5°	905.2	906.6	894.9	890.0	896.5
175°	908.9	910.8	899.1	893.3	897.8
177.5°	909.6	910.6	901.7	896.7	904.3
180°	904.3	904.3	904.3	904.3	904.3



TEST NUMBER: P1438645
 CATALOG NUMBER: CB2-055U-030D-840-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.32	13.02	13.43	14.12	15.65	11.22	11.92	12.33	13.03	14.55
	3H	13.95	14.58	15.07	15.69	17.23	12.73	13.36	13.85	14.48	16.02
	4H	14.57	15.17	15.70	16.28	17.83	13.30	13.90	14.43	15.01	16.56
	6H	14.97	15.52	16.10	16.63	18.19	13.66	14.21	14.80	15.33	16.89
	8H	15.11	15.63	16.25	16.76	18.31	13.80	14.32	14.94	15.45	17.00
	12H	15.18	15.68	16.32	16.80	18.37	13.86	14.35	15.00	15.48	17.05
4H	2H	12.71	13.31	13.84	14.42	15.96	11.83	12.43	12.97	13.55	15.09
	3H	14.56	15.06	15.70	16.20	17.76	13.55	14.05	14.69	15.19	16.75
	4H	15.30	15.76	16.45	16.89	18.47	14.22	14.68	15.36	15.81	17.39
	6H	15.81	16.21	16.96	17.36	18.93	14.69	15.08	15.84	16.23	17.80
	8H	16.01	16.38	17.16	17.52	19.11	14.87	15.24	16.02	16.38	17.97
	12H	16.11	16.45	17.28	17.60	19.19	14.95	15.29	16.12	16.44	18.03
8H	4H	15.45	15.81	16.60	16.96	18.54	14.48	14.85	15.63	15.99	17.58
	6H	16.08	16.38	17.25	17.57	19.15	15.08	15.38	16.25	16.57	18.15
	8H	16.37	16.63	17.55	17.80	19.40	15.35	15.62	16.53	16.78	18.38
	12H	16.54	16.77	17.72	17.93	19.57	15.50	15.73	16.68	16.89	18.53
12H	4H	15.42	15.75	16.58	16.91	18.50	14.48	14.81	15.64	15.96	17.55
	6H	16.11	16.37	17.28	17.54	19.14	15.14	15.41	16.32	16.57	18.17
	8H	16.42	16.65	17.60	17.81	19.45	15.44	15.67	16.62	16.83	18.47