

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1438968

Luminaire Tested: CB2-B-125U-085D-940-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1438968
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-1, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-B-125U-085D-940-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
2-INCH APERTURE
DOWNLIGHT 850 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 22183.7 lumens
Efficiency: N/A
Efficacy: 146.2 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 151.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1438968

CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

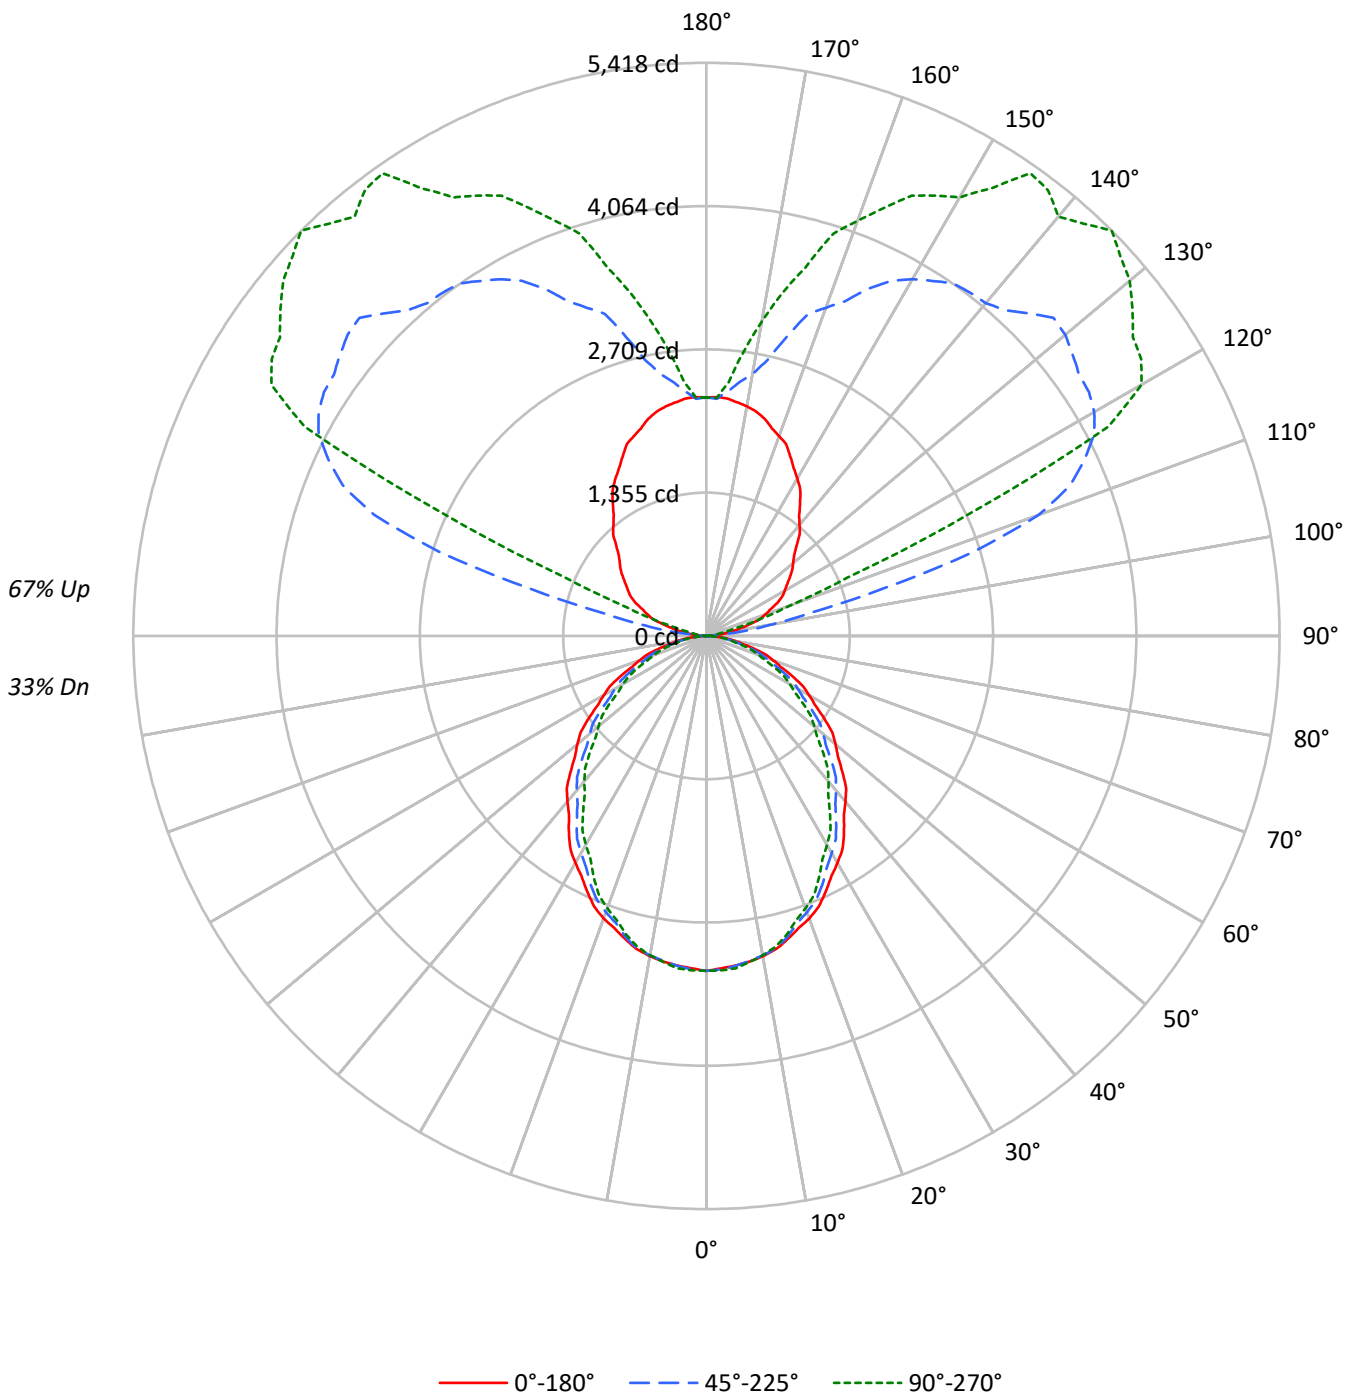



TEST NUMBER: P1438968

CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33																				
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28																				
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	29	24																				
3	78	69	62	57	70	63	57	52	50	46	43	39	36	34	28	27	25	20																				
4	72	61	54	48	64	56	49	44	45	40	36	35	32	29	25	23	22	18																				
5	66	55	47	41	59	50	43	38	40	35	31	31	28	25	23	21	19	15																				
6	60	49	41	35	54	44	38	33	36	31	27	28	25	22	21	19	17	14																				
7	56	44	36	31	50	40	33	29	33	28	24	26	22	19	19	17	15	12																				
8	52	40	32	27	47	36	30	25	30	25	21	23	20	17	18	15	13	11																				
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10																				
10	45	33	26	22	41	30	24	20	25	20	17	20	16	14	15	13	11	9																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	27573	27573	27573
5°	27340	27382	27573
10°	27184	27120	27099
15°	26754	26579	26361
20°	26333	25748	25389
25°	25625	24904	24204
30°	24916	23818	22916
35°	24099	22707	21625
40°	23235	21664	20395
45°	22364	20573	19199
50°	21580	19511	18033
55°	20614	18405	16932
60°	19509	17355	15834
65°	18334	16186	14738
70°	17037	14878	13335
75°	15498	13459	12073
80°	13862	11796	10943
85°	10662	9692	7994

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22364 cd/sqm



TEST NUMBER: P1438968

CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	297.7	1.3
10°-20°	830.0	3.7
20°-30°	1193.4	5.4
30°-40°	1341.4	6.0
40°-50°	1295.7	5.8
50°-60°	1094.8	4.9
60°-70°	786.4	3.5
70°-80°	429.8	1.9
80°-90°	114.2	0.5
90°-100°	168.8	0.8
100°-110°	1045.1	4.7
110°-120°	2635.7	11.9
120°-130°	3168.4	14.3
130°-140°	2872.7	12.9
140°-150°	2290.7	10.3
150°-160°	1562.6	7.0
160°-170°	826.4	3.7
170°-180°	230.0	1.0
0°-30°	2321.1	10.5
0°-40°	3662.5	16.5
0°-60°	6053.0	27.3
0°-90°	7383.4	33.3
90°-120°	3849.6	17.4
90°-150°	12181.4	54.9
90°-180°	14800.0	66.7
0°-180°	22183.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3166	3166	3166	3166	3166	
5°	3127	3170	3132	3133	3154	297
15°	2967	2994	2948	2919	2924	836
25°	2667	2669	2592	2533	2519	1228
35°	2267	2241	2136	2053	2034	1416
45°	1816	1778	1670	1583	1559	1403
55°	1358	1308	1212	1136	1115	1214
65°	890	857	786	729	715	882
75°	461	432	400	368	359	493
85°	107	100	97	85	80	127
90°	0	0	0	0	0	7
95°	87	220	68	48	48	111
105°	427	1196	1728	434	291	449
115°	738	1630	3942	3670	2796	724
125°	961	1977	4301	4894	4922	860
135°	1204	2191	4311	5047	5418	936
145°	1544	2303	4068	4903	5340	965
155°	1874	2348	3621	4364	4592	862
165°	2126	2326	2922	3441	3602	597
175°	2252	2281	2320	2360	2408	213
180°	2252	2252	2252	2252	2252	

TEST NUMBER: P1438968

CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3166.2	3166.2	3166.2	3166.2	3166.2
2.5°	3144.9	3182.8	3154.6	3158.6	3164.3
5°	3127.4	3170.1	3132.3	3132.8	3154.1
7.5°	3105.1	3145.4	3097.9	3089.1	3109.0
10°	3074.1	3114.4	3066.8	3050.2	3064.4
12.5°	3033.4	3071.8	3026.1	2999.7	3012.0
15°	2967.4	2993.5	2948.0	2919.1	2923.8
17.5°	2895.7	2911.8	2846.2	2821.9	2817.1
20°	2841.4	2855.6	2778.3	2744.3	2739.5
22.5°	2771.5	2783.9	2702.7	2660.8	2654.2
25°	2666.8	2669.2	2591.7	2533.2	2518.9
27.5°	2557.2	2549.6	2463.7	2394.4	2375.9
30°	2477.7	2468.2	2368.6	2295.5	2278.9
32.5°	2392.4	2375.3	2275.5	2196.6	2180.0
35°	2266.8	2240.7	2135.9	2053.0	2034.1
37.5°	2133.0	2103.6	2000.6	1910.4	1889.1
40°	2043.8	2010.6	1905.6	1815.4	1794.0
42.5°	1954.5	1917.6	1810.5	1720.3	1697.1
45°	1815.9	1777.9	1670.4	1582.6	1558.9
47.5°	1684.0	1635.6	1531.2	1443.9	1420.2
50°	1592.8	1540.7	1440.1	1354.7	1331.0
52.5°	1499.7	1445.7	1348.9	1267.4	1243.7
55°	1357.7	1307.9	1212.2	1136.5	1115.2
57.5°	1217.0	1169.2	1081.8	1009.5	988.7
60°	1120.1	1079.8	996.4	928.1	909.1
62.5°	1027.0	990.5	911.1	848.6	829.6
65°	889.7	856.6	785.5	729.4	715.2
67.5°	756.4	723.2	665.7	615.4	599.3
70°	669.1	635.9	584.3	537.9	523.7
72.5°	585.7	550.6	508.6	466.2	455.8
75°	460.6	432.2	400.0	368.3	358.8
77.5°	350.1	322.6	299.2	276.8	274.4
80°	276.4	252.7	235.2	220.6	218.2
82.5°	206.6	188.5	177.0	166.3	165.8
85°	106.7	99.6	97.0	84.7	80.0
87.5°	31.0	31.0	27.2	23.3	23.3
90°	0.0	0.0	0.0	0.0	0.0
92.5°	23.3	38.5	15.5	15.5	15.5
95°	87.4	220.3	68.0	48.5	48.5
97.5°	182.5	528.1	367.0	98.7	85.4
100°	252.4	765.1	631.1	145.0	116.5
102.5°	322.3	971.7	996.1	229.9	178.6
105°	427.2	1196.1	1728.2	433.7	291.3
107.5°	530.1	1342.7	2648.6	894.9	539.8
110°	592.2	1427.6	3339.8	1395.1	835.0



TEST NUMBER: P1438968

CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	654.4	1512.6	3720.4	2236.3	1440.8
115°	737.9	1630.2	3941.8	3669.5	2796.2
117.5°	807.8	1738.1	4132.1	4537.9	4281.6
120°	854.4	1822.7	4233.1	4662.2	4747.6
122.5°	901.0	1884.5	4287.4	4710.5	4871.9
125°	961.2	1976.9	4301.0	4893.9	4922.4
127.5°	1021.4	2046.6	4365.1	5062.5	5075.8
130°	1068.0	2093.2	4427.2	5118.9	5223.4
132.5°	1122.3	2132.4	4450.5	5151.2	5308.8
135°	1203.9	2191.2	4310.7	5047.3	5417.5
137.5°	1306.8	2233.3	4176.8	5044.3	5283.6
140°	1368.9	2242.3	4106.8	5155.8	5174.8
142.5°	1438.9	2266.7	4091.3	5143.6	5306.9
145°	1543.7	2303.2	4068.0	4903.2	5339.9
147.5°	1648.6	2326.4	3978.7	4637.9	5019.5
150°	1718.5	2335.5	3893.3	4549.1	4786.5
152.5°	1788.4	2344.7	3784.5	4493.9	4693.3
155°	1873.8	2348.5	3621.4	4364.5	4592.3
157.5°	1963.1	2337.2	3425.3	4128.0	4376.8
160°	2009.7	2323.0	3301.0	3956.5	4174.8
162.5°	2056.3	2316.4	3192.3	3732.1	3988.4
165°	2126.2	2325.6	2922.4	3440.6	3602.0
167.5°	2172.8	2317.1	2669.9	3094.5	3322.4
170°	2203.9	2317.8	2514.6	2829.6	3019.5
172.5°	2227.2	2280.4	2421.4	2587.4	2716.5
175°	2252.5	2280.9	2320.4	2360.3	2407.8
177.5°	2260.2	2275.4	2244.7	2237.3	2252.5
180°	2252.5	2252.5	2252.5	2252.5	2252.5



TEST NUMBER: P1438968
 CATALOG NUMBER: CB2-B-125U-085D-940-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.74	17.46	17.83	18.55	20.04	15.64	16.36	16.73	17.45	18.94
	3H	18.37	19.02	19.47	20.11	21.62	17.15	17.80	18.25	18.90	20.41
	4H	18.99	19.61	20.10	20.70	22.22	17.72	18.33	18.83	19.43	20.95
	6H	19.39	19.95	20.51	21.05	22.58	18.09	18.65	19.20	19.75	21.28
	8H	19.53	20.07	20.66	21.19	22.71	18.22	18.76	19.34	19.87	21.39
	12H	19.60	20.11	20.73	21.22	22.77	18.28	18.79	19.41	19.90	21.44
4H	2H	17.13	17.74	18.25	18.84	20.36	16.25	16.87	17.37	17.96	19.48
	3H	18.99	19.50	20.11	20.62	22.15	17.98	18.49	19.10	19.61	21.14
	4H	19.73	20.20	20.85	21.31	22.86	18.64	19.11	19.77	20.23	21.78
	6H	20.24	20.64	21.37	21.78	23.32	19.11	19.51	20.25	20.65	22.19
	8H	20.44	20.81	21.57	21.94	23.50	19.30	19.67	20.43	20.80	22.36
	12H	20.54	20.88	21.69	22.02	23.58	19.38	19.72	20.53	20.86	22.42
8H	4H	19.87	20.25	21.00	21.37	22.93	18.91	19.28	20.04	20.41	21.97
	6H	20.51	20.82	21.66	21.99	23.54	19.51	19.82	20.66	20.99	22.54
	8H	20.80	21.07	21.96	22.22	23.79	19.78	20.05	20.94	21.20	22.77
	12H	20.97	21.20	22.13	22.35	23.96	19.92	20.16	21.09	21.31	22.92
12H	4H	19.84	20.18	20.99	21.32	22.89	18.90	19.24	20.05	20.38	21.95
	6H	20.54	20.81	21.70	21.96	23.53	19.57	19.84	20.73	20.99	22.56
	8H	20.85	21.08	22.01	22.23	23.84	19.87	20.11	21.03	21.25	22.86