

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439056

Luminaire Tested: CB2-D-085U-055D-940-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439056
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-085U-055D-940-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 850 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12199.7 lumens
Efficiency: N/A
Efficacy: 129.4 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 94.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439056

CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

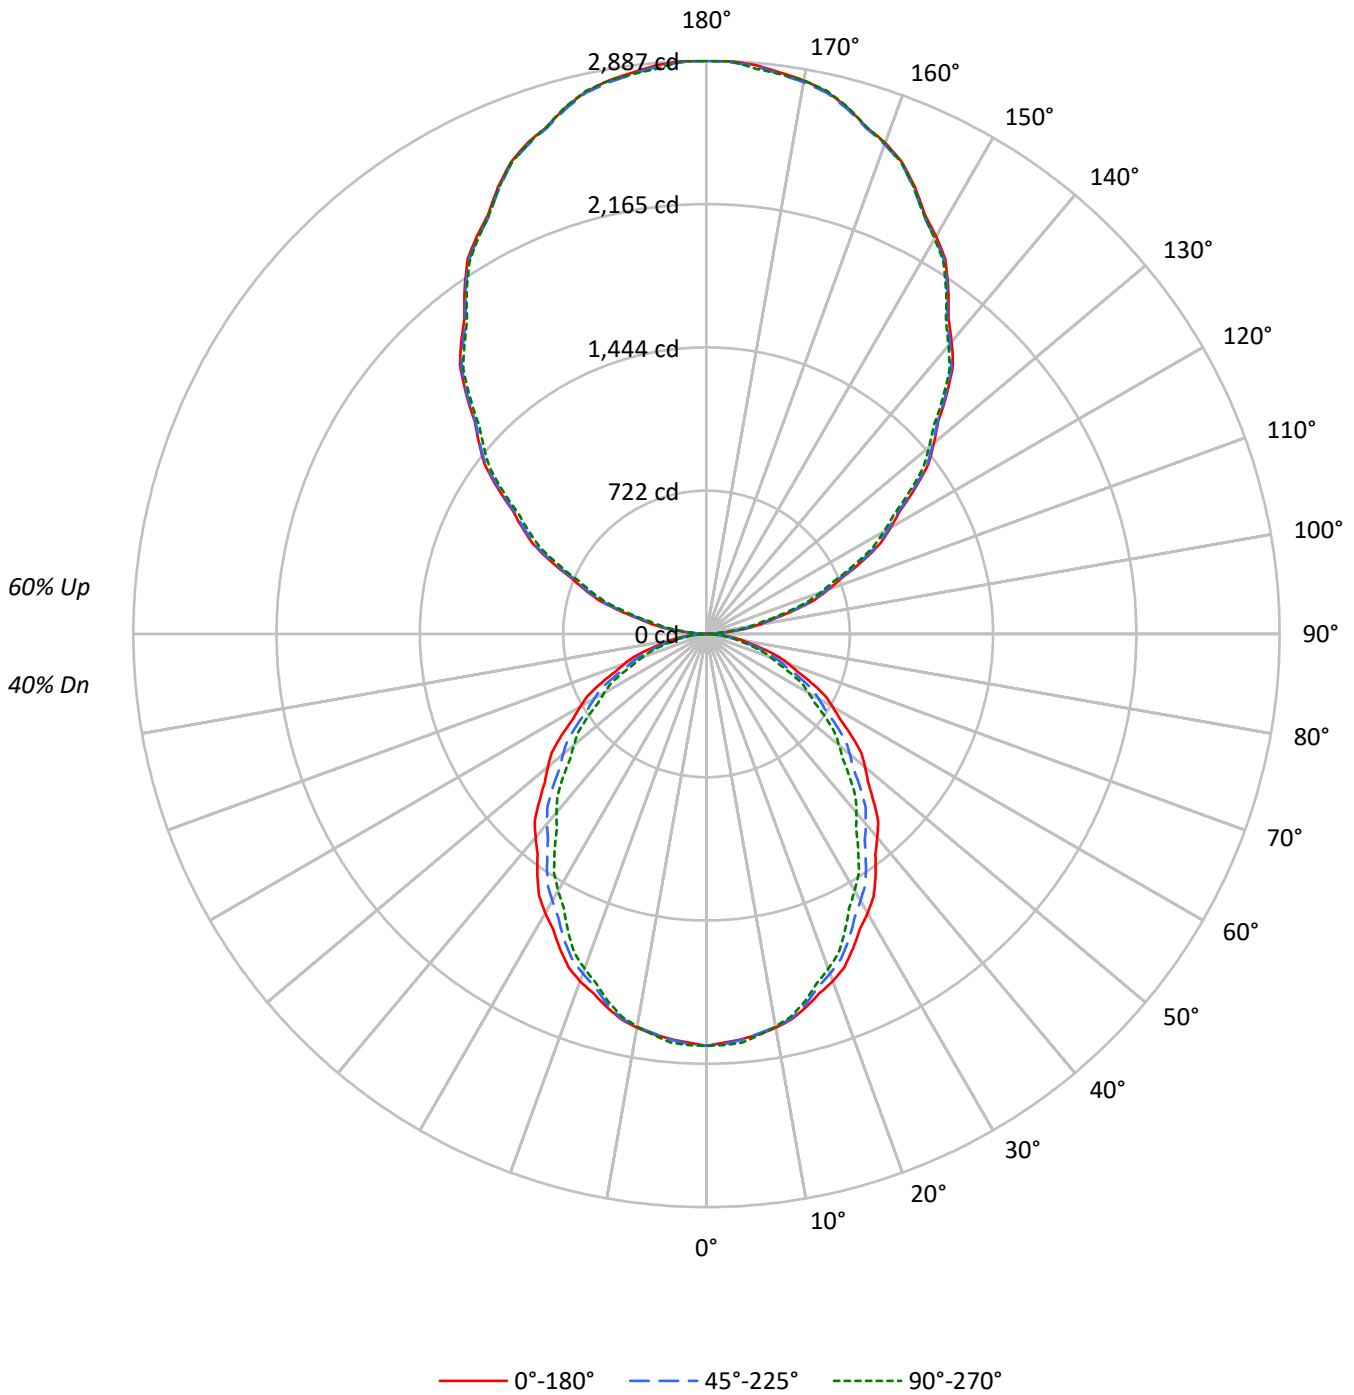



TEST NUMBER: P1439056

CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	95	95	95	95	78	78	78	61	61	61	47	47	47	40																				
1	96	91	88	84	87	83	80	77	68	66	64	54	53	51	41	40	40	34																				
2	87	80	74	69	79	73	68	64	60	56	53	48	45	43	37	35	34	28																				
3	80	70	63	58	72	64	58	53	53	48	45	42	39	37	33	30	29	24																				
4	73	62	55	49	66	57	50	45	47	42	38	38	34	31	29	27	25	21																				
5	67	56	48	42	61	51	44	39	42	37	33	34	30	27	26	24	22	18																				
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	24	21	19	16																				
7	57	45	37	32	52	41	34	30	34	29	25	28	24	21	22	19	17	14																				
8	53	41	33	28	48	38	31	26	31	26	23	26	22	19	20	17	15	13																				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12																				
10	46	34	27	22	42	31	25	21	26	22	18	22	18	15	17	15	13	11																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18064	18064	18064
5°	17911	17939	18064
10°	17810	17767	17753
15°	17528	17413	17270
20°	17252	16869	16633
25°	16789	16315	15858
30°	16324	15605	15013
35°	15789	14876	14167
40°	15222	14192	13362
45°	14652	13479	12578
50°	14138	12783	11814
55°	13505	12058	11093
60°	12781	11370	10374
65°	12012	10604	9656
70°	11163	9747	8736
75°	10155	8819	7911
80°	9082	7728	7167
85°	6984	6345	5236

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14652 cd/sqm



TEST NUMBER: P1439056

CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.1	1.6
10°-20°	543.8	4.5
20°-30°	781.9	6.4
30°-40°	878.8	7.2
40°-50°	848.9	7.0
50°-60°	717.2	5.9
60°-70°	515.2	4.2
70°-80°	281.6	2.3
80°-90°	74.9	0.6
90°-100°	111.5	0.9
100°-110°	460.0	3.8
110°-120°	835.0	6.8
120°-130°	1136.2	9.3
130°-140°	1311.6	10.8
140°-150°	1321.7	10.8
150°-160°	1140.6	9.3
160°-170°	773.1	6.3
170°-180°	272.7	2.2
0°-30°	1520.7	12.5
0°-40°	2399.5	19.7
0°-60°	3965.6	32.5
0°-90°	4837.3	39.7
90°-120°	1406.5	11.5
90°-150°	5176.0	42.4
90°-180°	7362.0	60.3
0°-180°	12199.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2074	2074	2074	2074	2074	
5°	2049	2077	2052	2052	2066	195
15°	1944	1961	1931	1912	1916	548
25°	1747	1749	1698	1660	1650	804
35°	1485	1468	1399	1345	1333	928
45°	1190	1165	1094	1037	1021	919
55°	890	857	794	745	731	795
65°	583	561	515	478	469	578
75°	302	283	262	241	235	323
85°	70	65	64	56	52	83
90°	0	0	2	0	2	6
95°	108	95	90	70	70	126
105°	455	448	437	412	408	483
115°	865	862	847	822	820	853
125°	1286	1299	1272	1245	1248	1148
135°	1714	1734	1705	1673	1684	1320
145°	2124	2148	2114	2090	2106	1327
155°	2484	2508	2472	2457	2477	1142
165°	2745	2774	2738	2723	2747	773
175°	2876	2906	2869	2851	2858	273
180°	2887	2887	2887	2887	2887	

TEST NUMBER: P1439056

CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2074.3	2074.3	2074.3	2074.3	2074.3
2.5°	2060.4	2085.2	2066.7	2069.4	2073.1
5°	2048.9	2076.9	2052.1	2052.4	2066.4
7.5°	2034.3	2060.7	2029.6	2023.8	2036.9
10°	2014.0	2040.4	2009.2	1998.3	2007.6
12.5°	1987.3	2012.5	1982.5	1965.3	1973.3
15°	1944.1	1961.2	1931.4	1912.4	1915.5
17.5°	1897.1	1907.7	1864.7	1848.7	1845.6
20°	1861.5	1870.8	1820.2	1797.9	1794.8
22.5°	1815.8	1823.8	1770.7	1743.2	1738.9
25°	1747.2	1748.7	1697.9	1659.6	1650.3
27.5°	1675.4	1670.4	1614.1	1568.7	1556.6
30°	1623.3	1617.1	1551.8	1503.9	1493.0
32.5°	1567.4	1556.2	1490.8	1439.1	1428.2
35°	1485.1	1468.0	1399.3	1345.0	1332.6
37.5°	1397.4	1378.1	1310.7	1251.6	1237.6
40°	1339.0	1317.2	1248.4	1189.3	1175.4
42.5°	1280.5	1256.3	1186.2	1127.0	1111.8
45°	1189.7	1164.8	1094.4	1036.8	1021.3
47.5°	1103.2	1071.6	1003.2	946.0	930.4
50°	1043.5	1009.4	943.5	887.5	872.0
52.5°	982.5	947.1	883.7	830.3	814.8
55°	889.5	856.8	794.2	744.6	730.6
57.5°	797.3	766.0	708.7	661.4	647.7
60°	733.8	707.4	652.8	608.0	595.6
62.5°	672.8	648.9	596.9	555.9	543.5
65°	582.9	561.2	514.6	477.9	468.6
67.5°	495.6	473.8	436.2	403.2	392.6
70°	438.4	416.6	382.8	352.4	343.1
72.5°	383.7	360.8	333.2	305.4	298.6
75°	301.8	283.1	262.1	241.3	235.1
77.5°	229.4	211.3	196.0	181.4	179.8
80°	181.1	165.5	154.1	144.5	142.9
82.5°	135.3	123.5	115.9	109.0	108.6
85°	69.9	65.2	63.5	55.5	52.4
87.5°	20.3	20.3	18.2	15.3	15.7
90°	0.0	0.0	2.3	0.1	2.3
92.5°	27.0	23.5	22.1	14.5	16.7
95°	108.1	94.9	90.1	69.8	69.8
97.5°	204.0	190.8	183.8	162.9	158.5
100°	272.5	259.3	252.2	229.6	225.2
102.5°	342.7	336.6	324.3	299.8	295.4
105°	454.9	448.3	436.9	412.0	407.6
107.5°	570.2	571.5	554.4	534.0	527.8
110°	653.0	650.8	637.3	616.9	612.5

TEST NUMBER: P1439056

CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	737.7	733.7	720.1	699.8	695.4
115°	864.7	862.5	846.7	821.9	819.7
117.5°	985.4	992.5	973.7	947.6	946.7
120°	1071.9	1080.7	1058.4	1035.7	1031.3
122.5°	1156.5	1167.1	1144.8	1118.7	1119.6
125°	1285.8	1299.0	1272.3	1245.3	1247.5
127.5°	1410.6	1426.8	1402.0	1374.6	1377.2
130°	1495.2	1515.0	1488.5	1459.3	1463.7
132.5°	1581.7	1601.5	1574.9	1544.0	1552.0
135°	1713.6	1733.5	1704.6	1673.4	1684.4
137.5°	1838.0	1857.8	1826.2	1800.0	1813.2
140°	1920.8	1940.6	1907.3	1882.8	1896.0
142.5°	2001.9	2025.2	1990.2	1964.0	1980.7
145°	2123.5	2147.7	2114.5	2090.1	2105.5
147.5°	2238.8	2263.0	2229.3	2205.8	2221.7
150°	2312.6	2336.9	2301.4	2281.5	2299.1
152.5°	2381.1	2408.8	2371.6	2351.9	2374.8
155°	2483.8	2508.0	2472.5	2457.2	2477.0
157.5°	2573.0	2601.1	2565.7	2552.6	2568.4
160°	2632.4	2658.8	2623.4	2610.3	2627.9
162.5°	2677.4	2705.6	2672.0	2657.2	2678.3
165°	2745.0	2773.6	2738.2	2723.0	2747.2
167.5°	2798.1	2828.5	2792.7	2777.1	2801.7
170°	2830.6	2859.2	2821.6	2804.1	2830.6
172.5°	2852.2	2882.6	2843.2	2825.6	2843.2
175°	2875.6	2906.4	2868.8	2851.0	2857.6
177.5°	2886.9	2911.5	2881.5	2865.7	2886.9
180°	2886.9	2886.9	2886.9	2886.9	2886.9



TEST NUMBER: P1439056
 CATALOG NUMBER: CB2-D-085U-055D-940-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.01	16.78	17.06	17.83	19.24	14.91	15.68	15.96	16.73	18.14
	3H	17.65	18.34	18.70	19.39	20.83	16.43	17.12	17.49	18.18	19.61
	4H	18.28	18.93	19.34	19.98	21.42	17.00	17.65	18.07	18.71	20.15
	6H	18.67	19.27	19.75	20.33	21.79	17.37	17.97	18.44	19.03	20.48
	8H	18.82	19.39	19.90	20.47	21.91	17.51	18.08	18.59	19.16	20.60
	12H	18.89	19.43	19.97	20.50	21.97	17.57	18.11	18.65	19.18	20.65
4H	2H	16.41	17.06	17.48	18.12	19.56	15.54	16.19	16.61	17.25	18.68
	3H	18.27	18.81	19.35	19.90	21.35	17.26	17.81	18.34	18.89	20.34
	4H	19.01	19.51	20.10	20.59	22.06	17.93	18.43	19.02	19.51	20.98
	6H	19.53	19.96	20.62	21.05	22.52	18.40	18.83	19.50	19.93	21.40
	8H	19.73	20.13	20.82	21.22	22.70	18.59	18.99	19.68	20.08	21.56
	12H	19.83	20.19	20.94	21.30	22.79	18.67	19.03	19.78	20.14	21.63
8H	4H	19.16	19.56	20.26	20.65	22.14	18.20	18.60	19.29	19.69	21.17
	6H	19.80	20.13	20.92	21.26	22.74	18.80	19.13	19.91	20.26	21.74
	8H	20.09	20.38	21.21	21.49	22.99	19.07	19.36	20.20	20.48	21.98
	12H	20.26	20.51	21.39	21.63	23.16	19.22	19.47	20.34	20.58	22.12
12H	4H	19.14	19.50	20.25	20.60	22.09	18.20	18.56	19.31	19.66	21.15
	6H	19.83	20.12	20.95	21.23	22.73	18.86	19.15	19.98	20.27	21.76
	8H	20.14	20.39	21.27	21.51	23.04	19.16	19.42	20.29	20.53	22.07