

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439087

Luminaire Tested: CB2-D-125U-055D-940-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439087
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-13, G2-2312-242-18)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB2-D-125U-055D-940-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, DIFFUSER DUST COVER UPLIGHT
2-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7945.9 lumens
Efficiency: N/A
Efficacy: 138.2 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 57.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439087

CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

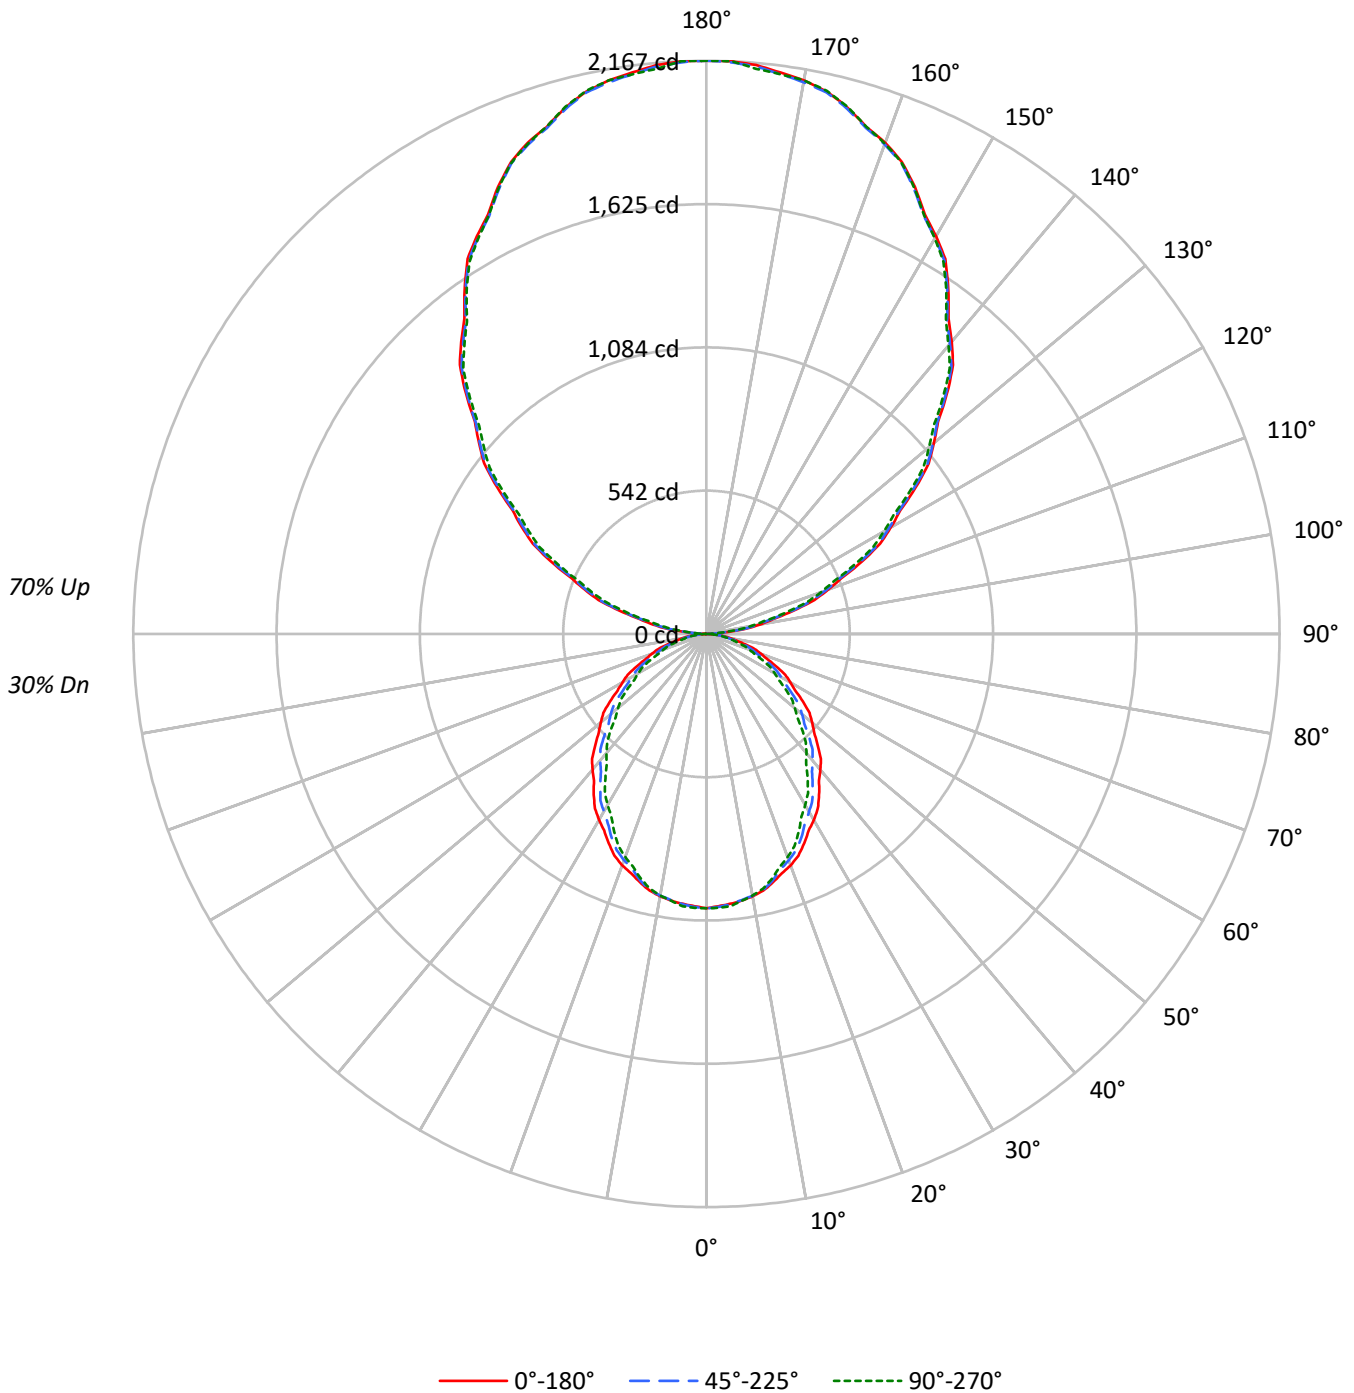



TEST NUMBER: P1439087

CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	102	102	102	102	92	92	92	92	72	72	72	55	55	55	38	38	38	30					30															
1	94	89	86	82	84	80	77	74	64	61	60	48	47	46	34	33	32	26					26															
2	85	78	72	67	76	70	65	61	56	52	49	42	40	38	30	29	27	22					22															
3	78	69	62	56	70	62	56	51	49	45	42	38	35	32	27	25	23	19					19															
4	71	61	53	47	64	55	48	43	44	39	35	33	30	28	24	22	20	16					16															
5	65	54	46	41	58	49	42	37	39	34	31	30	27	24	21	19	18	14					14															
6	60	48	41	35	54	44	37	32	35	30	27	27	24	21	20	17	16	12					12															
7	55	44	36	31	50	40	33	28	32	27	23	25	21	19	18	16	14	11					11															
8	51	39	32	27	46	36	29	25	29	24	21	22	19	17	16	14	12	10					10															
9	48	36	29	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9					9															
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8					8															

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18065	18065	18065
5°	17912	17940	18064
10°	17810	17767	17753
15°	17529	17413	17271
20°	17253	16869	16633
25°	16789	16316	15857
30°	16323	15605	15013
35°	15788	14877	14167
40°	15222	14192	13362
45°	14651	13479	12577
50°	14139	12781	11814
55°	13504	12058	11093
60°	12781	11370	10374
65°	12014	10604	9656
70°	11163	9747	8734
75°	10155	8816	7907
80°	9077	7723	7172
85°	6974	6355	5236

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14651 cd/sqm



TEST NUMBER: P1439087

CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.5	1.2
10°-20°	271.9	3.4
20°-30°	390.9	4.9
30°-40°	439.4	5.5
40°-50°	424.5	5.3
50°-60°	358.6	4.5
60°-70°	257.6	3.2
70°-80°	140.8	1.8
80°-90°	37.5	0.5
90°-100°	83.7	1.1
100°-110°	345.3	4.3
110°-120°	626.8	7.9
120°-130°	853.0	10.7
130°-140°	984.7	12.4
140°-150°	992.3	12.5
150°-160°	856.3	10.8
160°-170°	580.4	7.3
170°-180°	204.7	2.6
0°-30°	760.3	9.6
0°-40°	1199.7	15.1
0°-60°	1982.8	25.0
0°-90°	2418.7	30.4
90°-120°	1055.9	13.3
90°-150°	3885.8	48.9
90°-180°	5527.0	69.6
0°-180°	7945.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1037	1037	1037	1037	1037	
5°	1024	1038	1026	1026	1033	97
15°	972	981	966	956	958	274
25°	874	874	849	830	825	402
35°	742	734	700	672	666	464
45°	595	582	547	518	511	460
55°	445	428	397	372	365	398
65°	292	281	257	239	234	289
75°	151	142	131	121	118	161
85°	35	33	32	28	26	42
90°	0	0	2	0	2	4
95°	81	71	68	52	52	94
105°	342	336	328	309	306	362
115°	649	648	636	617	615	641
125°	965	975	955	935	937	862
135°	1286	1301	1280	1256	1264	991
145°	1594	1612	1587	1569	1581	996
155°	1865	1883	1856	1845	1860	857
165°	2061	2082	2056	2044	2062	580
175°	2159	2182	2154	2140	2145	205
180°	2167	2167	2167	2167	2167	



TEST NUMBER: P1439087

CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1037.2	1037.2	1037.2	1037.2	1037.2
2.5°	1030.2	1042.6	1033.4	1034.7	1036.5
5°	1024.5	1038.4	1026.1	1026.2	1033.2
7.5°	1017.2	1030.4	1014.8	1011.9	1018.4
10°	1007.0	1020.2	1004.6	999.2	1003.8
12.5°	993.7	1006.2	991.3	982.6	986.7
15°	972.1	980.6	965.7	956.2	957.8
17.5°	948.5	953.8	932.3	924.4	922.8
20°	930.8	935.4	910.1	899.0	897.4
22.5°	907.9	911.9	885.3	871.6	869.4
25°	873.6	874.4	849.0	829.8	825.1
27.5°	837.7	835.2	807.0	784.3	778.3
30°	811.6	808.5	775.9	751.9	746.5
32.5°	783.7	778.1	745.4	719.5	714.1
35°	742.5	734.0	699.7	672.5	666.3
37.5°	698.7	689.1	655.3	625.8	618.8
40°	669.5	658.6	624.2	594.7	587.7
42.5°	640.3	628.1	593.1	563.5	555.9
45°	594.8	582.4	547.2	518.4	510.6
47.5°	551.6	535.8	501.6	473.0	465.2
50°	521.8	504.7	471.7	443.8	436.0
52.5°	491.3	473.6	441.9	415.2	407.4
55°	444.7	428.4	397.1	372.3	365.3
57.5°	398.7	383.0	354.4	330.7	323.9
60°	366.9	353.7	326.4	304.0	297.8
62.5°	336.4	324.4	298.4	278.0	271.8
65°	291.5	280.6	257.3	238.9	234.3
67.5°	247.8	236.9	218.1	201.6	196.3
70°	219.2	208.3	191.4	176.2	171.5
72.5°	191.9	180.4	166.6	152.7	149.3
75°	150.9	141.6	131.0	120.6	117.5
77.5°	114.7	105.7	98.0	90.7	89.9
80°	90.5	82.8	77.0	72.3	71.5
82.5°	67.7	61.8	58.0	54.5	54.3
85°	34.9	32.6	31.8	27.8	26.2
87.5°	10.2	10.2	9.2	7.6	8.0
90°	0.0	0.0	1.7	0.0	1.7
92.5°	20.3	17.6	16.6	10.9	12.5
95°	81.1	71.2	67.6	52.4	52.4
97.5°	153.2	143.2	137.9	122.3	119.0
100°	204.6	194.6	189.3	172.4	169.1
102.5°	257.3	252.7	243.4	225.1	221.8
105°	341.5	336.5	328.0	309.3	306.0
107.5°	428.0	429.0	416.2	400.9	396.3
110°	490.3	488.6	478.4	463.1	459.8



TEST NUMBER: P1439087

CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	553.8	550.8	540.6	525.3	522.0
115°	649.2	647.5	635.6	617.0	615.4
117.5°	739.8	745.1	731.0	711.4	710.7
120°	804.7	811.3	794.6	777.6	774.3
122.5°	868.3	876.2	859.5	839.9	840.5
125°	965.3	975.2	955.2	934.9	936.6
127.5°	1059.0	1071.2	1052.5	1031.9	1033.9
130°	1122.5	1137.4	1117.4	1095.5	1098.8
132.5°	1187.4	1202.3	1182.4	1159.2	1165.1
135°	1286.5	1301.4	1279.7	1256.3	1264.5
137.5°	1379.8	1394.7	1371.0	1351.3	1361.2
140°	1442.0	1456.9	1431.9	1413.5	1423.4
142.5°	1502.9	1520.4	1494.1	1474.4	1487.0
145°	1594.2	1612.4	1587.4	1569.1	1580.7
147.5°	1680.7	1698.9	1673.6	1656.0	1667.9
150°	1736.2	1754.4	1727.7	1712.8	1726.0
152.5°	1787.6	1808.4	1780.5	1765.6	1782.8
155°	1864.7	1882.8	1856.2	1844.7	1859.6
157.5°	1931.6	1952.8	1926.2	1916.3	1928.2
160°	1976.2	1996.1	1969.5	1959.6	1972.9
162.5°	2010.0	2031.2	2006.0	1994.9	2010.7
165°	2060.8	2082.3	2055.7	2044.3	2062.5
167.5°	2100.7	2123.5	2096.6	2084.9	2103.4
170°	2125.0	2146.5	2118.2	2105.2	2125.0
172.5°	2141.2	2164.0	2134.5	2121.2	2134.5
175°	2158.8	2182.0	2153.7	2140.3	2145.3
177.5°	2167.3	2185.8	2163.2	2151.4	2167.3
180°	2167.3	2167.3	2167.3	2167.3	2167.3



TEST NUMBER: P1439087
 CATALOG NUMBER: CB2-D-125U-055D-940-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.90	15.60	16.01	16.70	18.23	13.80	14.50	14.91	15.61	17.13
	3H	16.53	17.16	17.65	18.27	19.82	15.31	15.94	16.43	17.06	18.60
	4H	17.15	17.75	18.28	18.86	20.41	15.88	16.48	17.01	17.59	19.14
	6H	17.55	18.10	18.68	19.21	20.77	16.24	16.79	17.38	17.91	19.47
	8H	17.69	18.21	18.83	19.34	20.90	16.38	16.90	17.52	18.03	19.59
	12H	17.76	18.25	18.90	19.38	20.96	16.44	16.93	17.58	18.06	19.63
4H	2H	15.29	15.88	16.42	17.00	18.55	14.41	15.01	15.55	16.12	17.67
	3H	17.14	17.64	18.28	18.78	20.34	16.13	16.63	17.28	17.77	19.33
	4H	17.88	18.34	19.03	19.47	21.05	16.80	17.26	17.95	18.39	19.97
	6H	18.39	18.78	19.54	19.94	21.51	17.27	17.66	18.42	18.81	20.38
	8H	18.59	18.96	19.74	20.10	21.69	17.45	17.82	18.60	18.96	20.55
	12H	18.69	19.02	19.86	20.18	21.77	17.53	17.87	18.70	19.02	20.61
8H	4H	18.03	18.39	19.18	19.53	21.12	17.06	17.43	18.21	18.57	20.16
	6H	18.66	18.96	19.83	20.15	21.73	17.66	17.96	18.83	19.15	20.73
	8H	18.95	19.21	20.13	20.38	21.98	17.93	18.20	19.11	19.36	20.97
	12H	19.12	19.35	20.30	20.51	22.15	18.08	18.31	19.26	19.47	21.11
12H	4H	18.00	18.33	19.16	19.48	21.08	17.06	17.39	18.22	18.54	20.14
	6H	18.69	18.95	19.87	20.12	21.72	17.72	17.98	18.90	19.15	20.75
	8H	19.00	19.23	20.18	20.39	22.03	18.02	18.25	19.20	19.41	21.05