

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439140

Luminaire Tested: CB3-030U-085D-927-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439140
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-030U-085D-927-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 850 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9106.7 lumens
Efficiency: N/A
Efficacy: 130.3 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 69.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

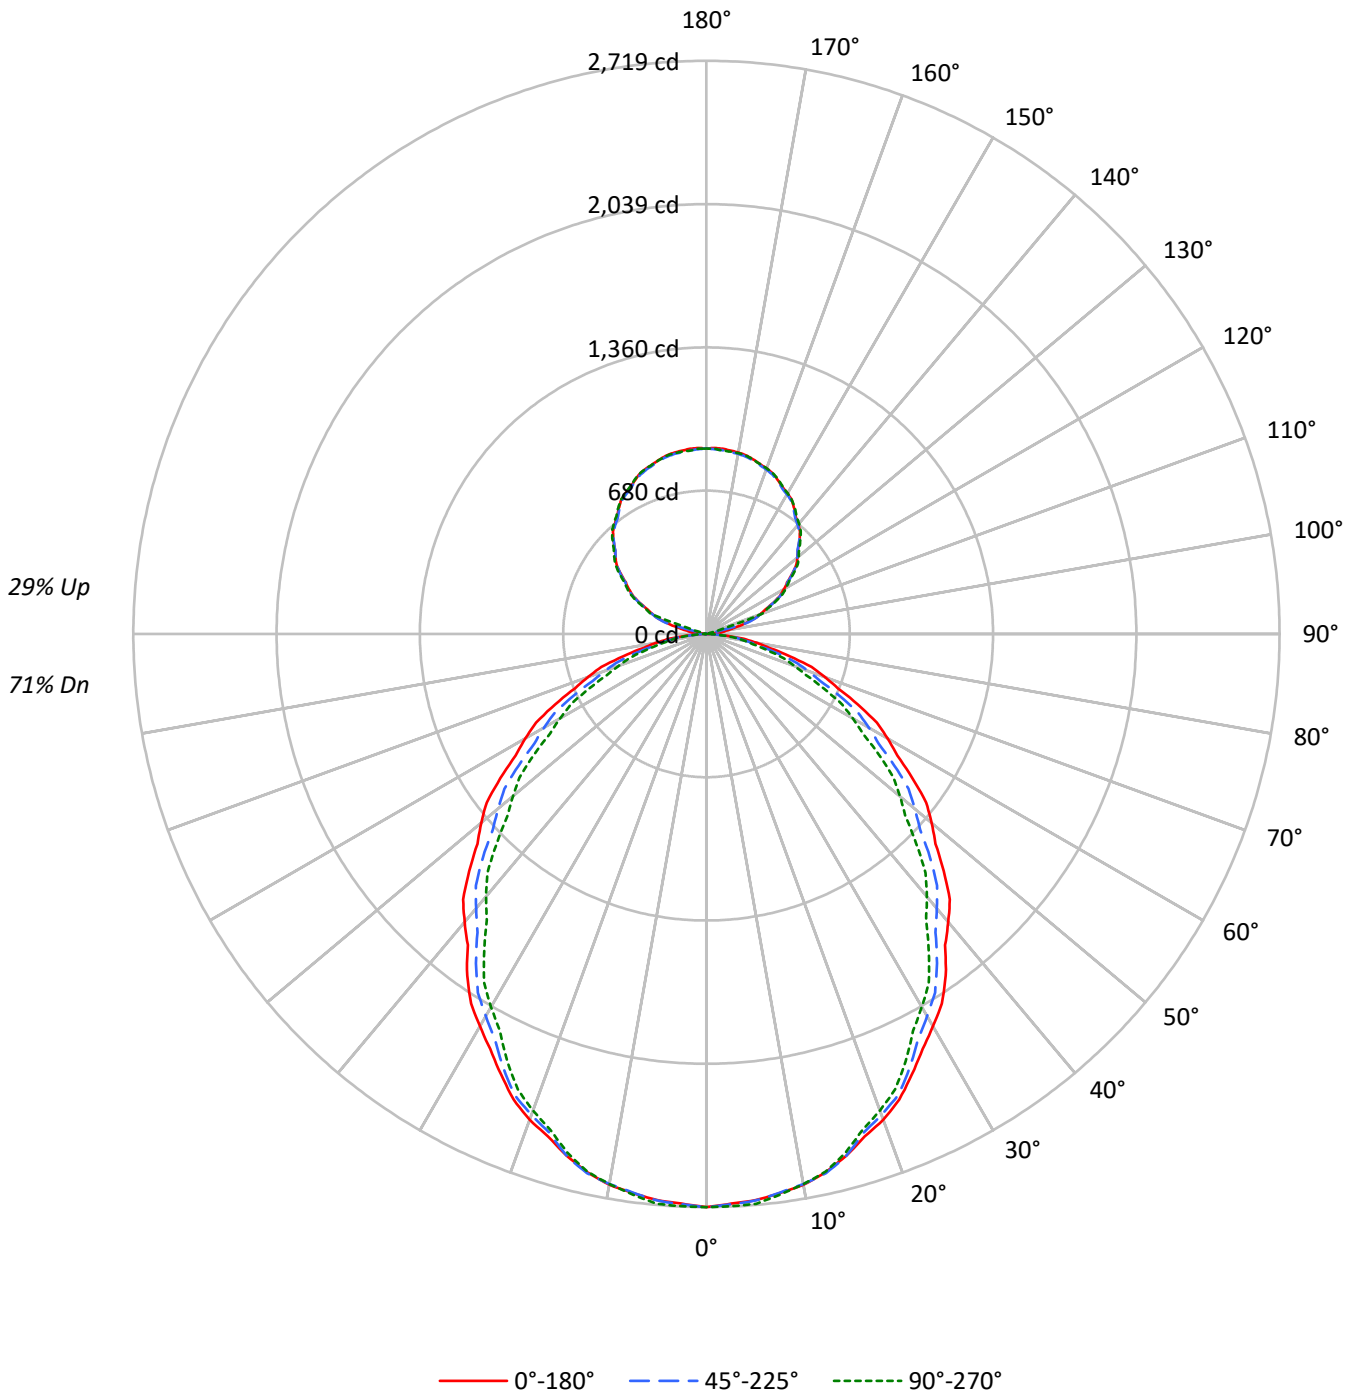



TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									70									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	76	76	76	71													
1	103	98	95	91	97	93	90	87	84	81	79	75	73	72	68	66	65	65	65	65	65	65	65	61													
2	94	86	80	75	89	82	76	72	74	70	66	67	63	60	60	57	55	55	55	55	55	55	55	51													
3	86	76	69	63	81	72	66	60	66	60	56	59	55	51	53	50	47	47	47	47	47	47	47	44													
4	79	68	60	53	74	64	57	52	58	53	48	53	48	44	48	44	41	41	41	41	41	41	41	38													
5	72	61	52	46	68	58	50	45	53	46	42	48	43	39	43	39	36	36	36	36	36	36	36	33													
6	67	55	46	40	63	52	45	39	48	41	36	43	38	34	39	35	32	32	32	32	32	32	32	29													
7	62	49	41	36	59	47	40	34	43	37	32	39	34	30	36	31	28	28	28	28	28	28	28	26													
8	58	45	37	32	55	43	36	31	40	33	29	36	31	27	33	29	25	25	25	25	25	25	25	23													
9	54	41	34	28	51	40	33	28	36	30	26	33	28	25	31	26	23	23	23	23	23	23	23	21													
10	50	38	31	26	48	37	30	25	34	28	24	31	26	22	28	24	21	21	21	21	21	21	21	19													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15383	15383	15383
5°	15311	15322	15409
10°	15244	15221	15221
15°	15010	15010	14920
20°	14766	14615	14487
25°	14394	14213	13960
30°	14042	13676	13348
35°	13672	13165	12698
40°	13179	12551	12009
45°	12732	12006	11264
50°	12272	11354	10539
55°	11772	10724	9848
60°	11232	10073	9069
65°	10599	9333	8247
70°	9872	8466	7347
75°	8949	7430	6542
80°	7803	6229	5789
85°	6017	5264	5264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12732 cd/sqm



TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.6	2.8
10°-20°	720.8	7.9
20°-30°	1047.2	11.5
30°-40°	1190.6	13.1
40°-50°	1155.8	12.7
50°-60°	975.9	10.7
60°-70°	694.3	7.6
70°-80°	371.0	4.1
80°-90°	98.0	1.1
90°-100°	20.3	0.2
100°-110°	147.1	1.6
110°-120°	349.8	3.8
120°-130°	446.9	4.9
130°-140°	482.1	5.3
140°-150°	454.4	5.0
150°-160°	370.7	4.1
160°-170°	241.5	2.7
170°-180°	83.5	0.9
0°-30°	2024.6	22.2
0°-40°	3215.3	35.3
0°-60°	5347.0	58.7
0°-90°	6510.2	71.5
90°-120°	517.3	5.7
90°-150°	1900.7	20.9
90°-180°	2596.0	28.5
0°-180°	9106.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2719	2719	2719	2719	2719	
5°	2696	2730	2698	2695	2713	256
15°	2563	2586	2563	2547	2547	722
25°	2306	2314	2277	2246	2236	1062
35°	1980	1961	1906	1850	1839	1234
45°	1591	1567	1501	1429	1408	1227
55°	1194	1161	1087	1017	998	1067
65°	792	764	697	635	616	784
75°	409	387	340	305	299	436
85°	93	85	81	81	81	110
90°	0	0	0	1	0	5
95°	37	7	9	9	9	46
105°	186	189	192	14	15	196
115°	349	352	353	358	360	345
125°	497	500	499	504	507	443
135°	624	627	622	627	630	480
145°	726	730	721	726	730	454
155°	804	811	800	802	807	371
165°	857	862	853	850	856	242
175°	882	886	874	870	872	84
180°	880	880	880	880	880	

TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2719.2	2719.2	2719.2	2719.2	2719.2
2.5°	2705.3	2732.5	2708.4	2711.7	2717.7
5°	2696.1	2730.1	2698.0	2694.6	2713.4
7.5°	2675.2	2706.2	2672.9	2665.2	2682.2
10°	2653.6	2687.6	2649.7	2640.3	2649.7
12.5°	2615.0	2650.5	2620.4	2604.7	2612.6
15°	2562.8	2585.5	2562.8	2547.4	2547.4
17.5°	2499.1	2522.9	2480.1	2469.2	2465.1
20°	2452.7	2473.5	2427.6	2412.0	2406.4
22.5°	2390.9	2410.2	2372.0	2345.6	2338.4
25°	2305.9	2313.5	2277.0	2245.9	2236.4
27.5°	2220.6	2222.5	2172.3	2134.6	2122.1
30°	2149.5	2151.4	2093.5	2052.7	2043.3
32.5°	2078.4	2072.8	2017.8	1969.4	1963.0
35°	1979.6	1960.7	1906.2	1849.9	1838.6
37.5°	1860.2	1848.9	1784.5	1728.1	1711.1
40°	1784.5	1765.6	1699.5	1643.1	1626.1
42.5°	1708.8	1686.9	1619.2	1556.6	1538.1
45°	1591.4	1566.8	1500.6	1428.7	1407.9
47.5°	1473.2	1446.4	1373.5	1303.9	1280.8
50°	1394.4	1366.1	1290.1	1221.9	1197.4
52.5°	1314.0	1284.2	1208.2	1138.6	1118.6
55°	1193.5	1161.4	1087.3	1017.4	998.5
57.5°	1073.0	1041.3	967.6	901.4	878.7
60°	992.7	962.5	890.3	824.1	801.5
62.5°	910.8	882.1	811.5	746.9	725.8
65°	791.8	763.5	697.2	635.0	616.1
67.5°	674.0	649.8	584.4	527.3	512.2
70°	596.8	574.1	511.8	459.3	444.2
72.5°	522.6	498.4	439.2	394.5	383.9
75°	409.4	386.8	339.9	305.0	299.3
77.5°	305.9	287.4	246.8	227.0	224.0
80°	239.5	222.5	191.2	177.7	177.7
82.5°	177.7	163.7	143.3	137.5	137.5
85°	92.7	85.1	81.1	81.1	81.1
87.5°	27.8	27.8	26.3	24.9	24.7
90°	0.0	0.0	0.0	0.6	0.0
92.5°	10.1	3.9	3.2	3.8	3.7
95°	37.1	6.7	8.6	9.3	9.3
97.5°	74.8	73.4	10.1	12.1	12.2
100°	103.4	106.7	10.6	12.6	13.3
102.5°	135.2	138.0	19.6	13.1	13.8
105°	186.3	188.9	191.6	13.9	14.6
107.5°	237.1	239.0	240.8	216.8	81.1
110°	270.5	272.4	273.1	279.8	281.1



TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	301.8	304.3	305.5	311.1	313.5
115°	349.4	352.0	352.7	358.1	360.0
117.5°	394.6	397.3	398.6	402.9	406.0
120°	424.3	427.6	428.3	433.6	436.2
122.5°	453.5	457.2	456.9	461.8	465.4
125°	496.6	499.8	498.6	503.9	507.2
127.5°	537.5	539.5	536.8	543.3	546.0
130°	563.5	565.5	562.2	568.2	571.5
132.5°	587.4	590.4	586.6	592.1	595.4
135°	623.9	627.1	621.9	626.6	630.5
137.5°	656.4	660.2	654.0	659.5	662.8
140°	677.6	681.5	673.6	679.6	683.5
142.5°	697.2	702.1	692.7	698.2	702.6
145°	726.0	730.5	721.3	726.1	729.9
147.5°	753.3	757.2	748.4	751.8	754.5
150°	769.7	773.6	763.8	767.1	770.4
152.5°	783.0	788.4	778.6	781.0	785.8
155°	804.2	810.7	799.6	801.7	806.8
157.5°	823.7	829.5	818.4	820.2	824.8
160°	835.4	841.2	830.1	830.8	835.4
162.5°	844.4	849.7	840.1	838.8	844.4
165°	857.2	861.8	852.6	850.1	855.9
167.5°	868.0	873.2	861.9	859.8	866.4
170°	873.8	879.0	867.2	864.0	871.2
172.5°	877.5	882.2	870.9	866.6	872.2
175°	881.8	886.3	874.5	869.9	872.5
177.5°	883.0	886.6	877.1	873.0	879.2
180°	879.8	879.8	879.8	879.8	879.8

TEST NUMBER: P1439140

CATALOG NUMBER: CB3-030U-085D-927-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.44	19.51	19.19	20.28	21.21	17.36	18.43	18.11	19.20	20.13
	3H	20.12	21.08	20.88	21.86	22.82	18.79	19.75	19.55	20.53	21.49
	4H	20.76	21.67	21.54	22.46	23.43	19.31	20.22	20.10	21.01	21.98
	6H	21.15	21.99	21.95	22.79	23.78	19.64	20.48	20.44	21.28	22.27
	8H	21.30	22.10	22.10	22.91	23.90	19.77	20.57	20.58	21.39	22.37
	12H	21.37	22.13	22.18	22.95	23.96	19.85	20.62	20.66	21.43	22.44
4H	2H	18.87	19.78	19.65	20.57	21.54	18.01	18.92	18.80	19.71	20.68
	3H	20.78	21.54	21.58	22.36	23.35	19.65	20.41	20.45	21.23	22.22
	4H	21.54	22.23	22.35	23.05	24.06	20.26	20.95	21.08	21.78	22.79
	6H	22.05	22.65	22.88	23.49	24.51	20.69	21.28	21.52	22.13	23.15
	8H	22.25	22.80	23.08	23.65	24.68	20.86	21.42	21.70	22.26	23.30
	12H	22.35	22.85	23.21	23.72	24.76	20.98	21.48	21.83	22.34	23.38
8H	4H	21.68	22.24	22.51	23.08	24.11	20.54	21.10	21.37	21.94	22.98
	6H	22.31	22.77	23.17	23.66	24.69	21.08	21.54	21.94	22.43	23.46
	8H	22.59	23.00	23.46	23.88	24.93	21.33	21.74	22.21	22.62	23.67
	12H	22.76	23.12	23.63	23.99	25.10	21.52	21.88	22.39	22.75	23.86
12H	4H	21.66	22.17	22.52	23.03	24.07	20.55	21.06	21.41	21.92	22.96
	6H	22.33	22.74	23.20	23.62	24.67	21.14	21.55	22.01	22.43	23.48
	8H	22.64	23.00	23.51	23.87	24.97	21.43	21.79	22.30	22.66	23.77