

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439378

Luminaire Tested: CB3-B-030U-055D-927-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439378
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-B-030U-055D-927-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
3-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7078.4 lumens
Efficiency: N/A
Efficacy: 139.9 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 50.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439378

CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

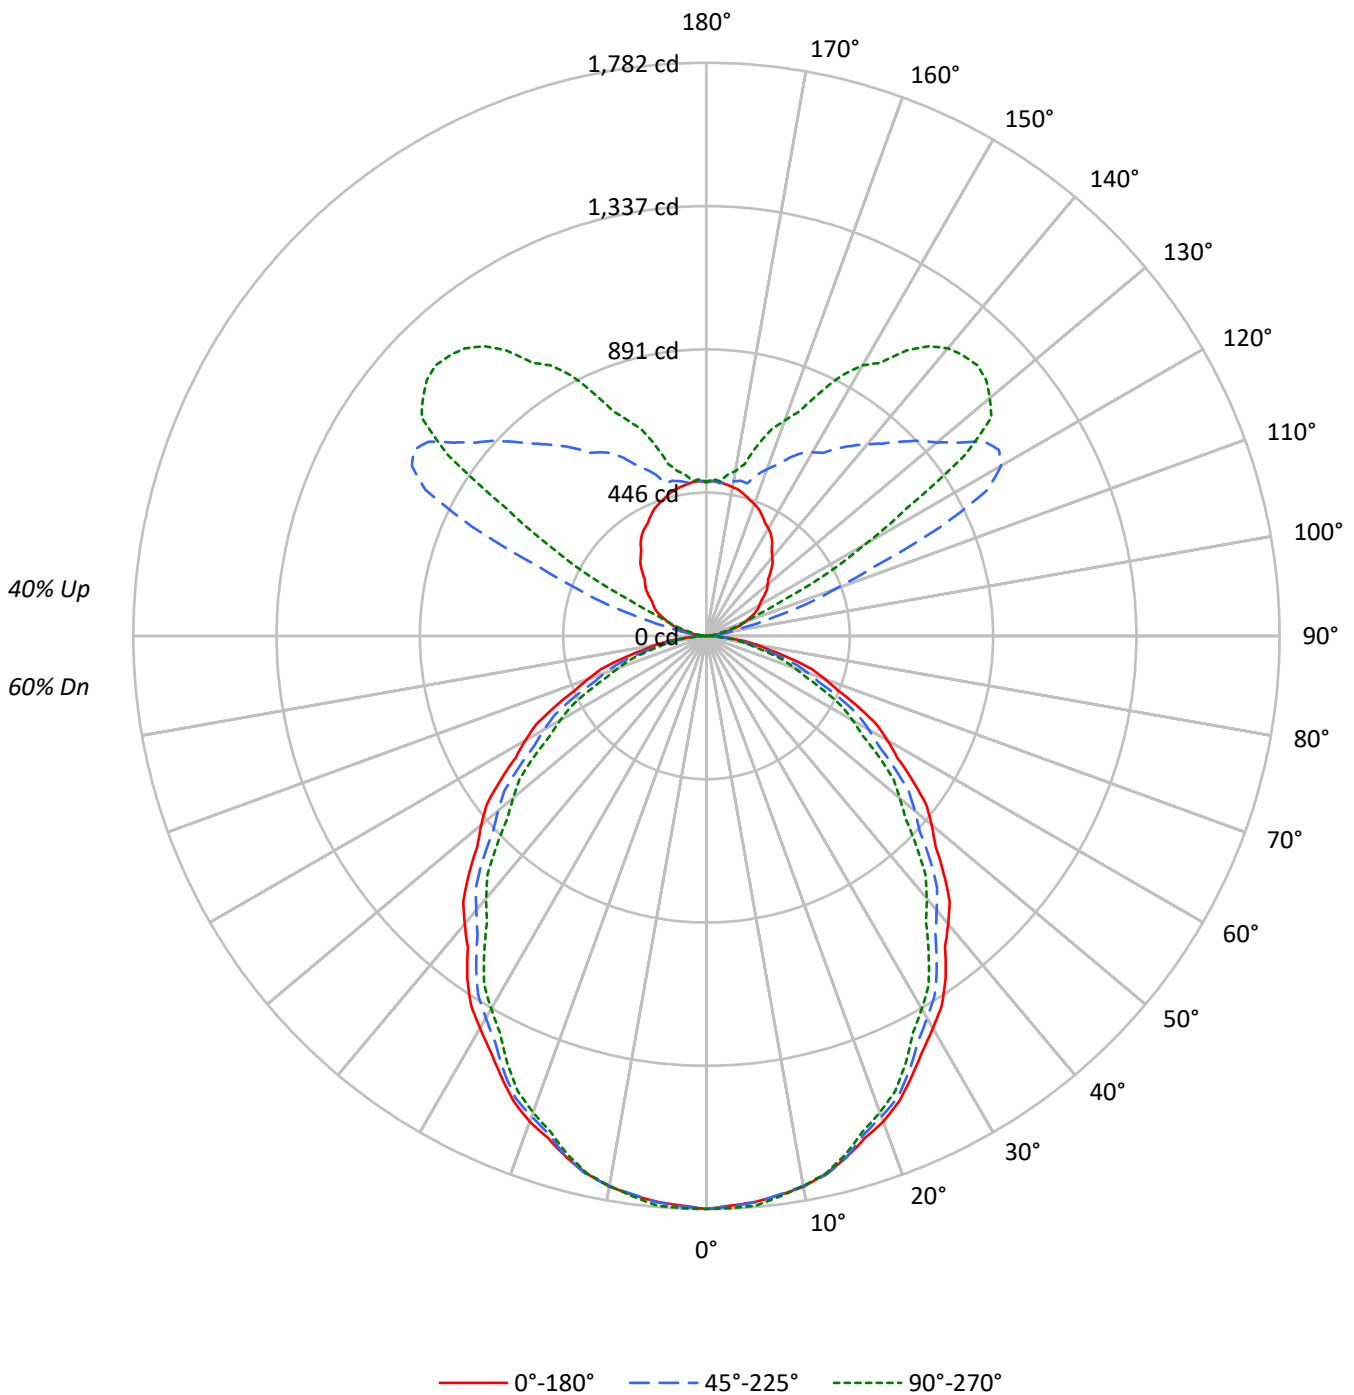



TEST NUMBER: P1439378

CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	60
1	100	96	92	89	94	90	87	83	78	76	74	68	66	64	58	57	56	51
2	92	84	78	73	85	79	73	69	69	65	61	60	57	54	52	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	37
4	77	66	58	52	71	62	55	49	54	49	44	48	43	40	41	38	35	32
5	70	59	51	45	66	55	48	43	49	43	38	43	38	35	37	34	31	28
6	65	53	45	39	61	50	42	37	44	38	34	39	34	30	34	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	31	27	31	27	24	22
8	56	44	36	30	52	41	34	29	37	31	27	32	28	24	28	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	23	20	18
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10078	10078	10078
5°	10031	10038	10095
10°	9987	9973	9973
15°	9834	9834	9775
20°	9674	9575	9491
25°	9430	9312	9146
30°	9199	8960	8745
35°	8957	8625	8319
40°	8634	8223	7868
45°	8341	7865	7380
50°	8040	7439	6905
55°	7712	7026	6452
60°	7358	6600	5941
65°	6945	6115	5403
70°	6467	5546	4813
75°	5862	4868	4286
80°	5112	4082	3792
85°	3940	3447	3447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8341 cd/sqm



TEST NUMBER: P1439378

CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	168.1	2.4
10°-20°	472.2	6.7
20°-30°	686.1	9.7
30°-40°	780.0	11.0
40°-50°	757.3	10.7
50°-60°	639.3	9.0
60°-70°	454.9	6.4
70°-80°	243.0	3.4
80°-90°	64.2	0.9
90°-100°	32.4	0.5
100°-110°	169.5	2.4
110°-120°	426.7	6.0
120°-130°	658.2	9.3
130°-140°	602.6	8.5
140°-150°	444.7	6.3
150°-160°	283.5	4.0
160°-170°	149.2	2.1
170°-180°	46.5	0.7
0°-30°	1326.4	18.7
0°-40°	2106.5	29.8
0°-60°	3503.0	49.5
0°-90°	4265.1	60.3
90°-120°	628.5	8.9
90°-150°	2334.0	33.0
90°-180°	2813.0	39.7
0°-180°	7078.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1782	1782	1782	1782	1782	
5°	1766	1789	1768	1765	1778	168
15°	1679	1694	1679	1669	1669	473
25°	1511	1516	1492	1471	1465	696
35°	1297	1284	1249	1212	1204	808
45°	1043	1026	983	936	922	804
55°	782	761	712	666	654	699
65°	519	500	457	416	404	514
75°	268	253	223	200	196	286
85°	61	56	53	53	53	72
90°	0	0	0	0	0	3
95°	17	48	19	10	10	21
105°	86	268	194	80	65	92
115°	164	335	805	350	266	160
125°	219	339	1054	1062	982	196
135°	282	377	853	1164	1190	218
145°	356	412	712	990	1083	221
155°	411	442	611	756	834	189
165°	455	468	491	574	613	128
175°	480	491	476	478	482	45
180°	478	478	478	478	478	



TEST NUMBER: P1439378

CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1781.5	1781.5	1781.5	1781.5	1781.5
2.5°	1772.4	1790.2	1774.4	1776.5	1780.5
5°	1766.3	1788.6	1767.6	1765.3	1777.7
7.5°	1752.7	1772.9	1751.1	1746.1	1757.2
10°	1738.5	1760.8	1736.0	1729.8	1736.0
12.5°	1713.2	1736.4	1716.7	1706.5	1711.7
15°	1679.0	1693.9	1679.0	1668.9	1668.9
17.5°	1637.3	1652.8	1624.9	1617.7	1615.0
20°	1606.9	1620.5	1590.4	1580.2	1576.5
22.5°	1566.4	1579.0	1554.0	1536.7	1532.0
25°	1510.7	1515.7	1491.8	1471.4	1465.2
27.5°	1454.8	1456.0	1423.2	1398.4	1390.3
30°	1408.2	1409.5	1371.6	1344.8	1338.7
32.5°	1361.7	1358.0	1322.0	1290.2	1286.0
35°	1296.9	1284.5	1248.8	1212.0	1204.5
37.5°	1218.7	1211.3	1169.1	1132.2	1121.0
40°	1169.1	1156.7	1113.4	1076.5	1065.4
42.5°	1119.5	1105.2	1060.8	1019.8	1007.7
45°	1042.6	1026.5	983.1	936.0	922.4
47.5°	965.1	947.6	899.9	854.2	839.1
50°	913.5	895.0	845.2	800.6	784.5
52.5°	860.9	841.3	791.6	746.0	732.8
55°	781.9	760.9	712.3	666.5	654.1
57.5°	703.0	682.2	633.9	590.5	575.7
60°	650.3	630.6	583.3	539.9	525.1
62.5°	596.7	577.9	531.7	489.3	475.5
65°	518.8	500.2	456.8	416.0	403.6
67.5°	441.6	425.7	382.9	345.4	335.5
70°	391.0	376.1	335.3	300.9	291.0
72.5°	342.4	326.5	287.7	258.5	251.5
75°	268.2	253.4	222.7	199.8	196.1
77.5°	200.4	188.3	161.7	148.8	146.8
80°	156.9	145.8	125.3	116.4	116.4
82.5°	116.4	107.2	93.9	90.1	90.1
85°	60.7	55.8	53.1	53.1	53.1
87.5°	18.2	18.2	17.2	16.2	16.2
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.1	11.6	3.4	1.7	3.4
95°	16.9	47.8	19.0	10.5	10.5
97.5°	35.0	106.7	48.9	26.1	23.6
100°	48.5	151.5	75.9	37.8	33.7
102.5°	63.6	196.3	114.6	51.2	43.8
105°	86.4	267.7	193.8	79.7	65.3
107.5°	111.7	316.5	319.4	122.9	99.0
110°	128.5	336.6	425.6	161.4	124.3



TEST NUMBER: P1439378

CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	143.7	341.9	567.2	220.1	169.8
115°	164.4	335.4	804.9	350.0	265.5
117.5°	179.5	319.2	985.3	556.7	429.4
120°	189.6	319.4	1057.7	713.2	571.0
122.5°	201.4	321.3	1078.0	868.5	737.9
125°	219.1	338.6	1053.5	1062.2	981.9
127.5°	236.8	351.4	987.8	1141.9	1116.7
130°	248.6	359.9	935.5	1169.0	1150.5
132.5°	260.4	368.4	898.5	1169.6	1179.1
135°	282.3	377.1	853.4	1163.7	1190.5
137.5°	304.7	387.9	811.2	1126.9	1182.5
140°	318.2	396.5	777.5	1087.0	1167.3
142.5°	333.3	403.4	745.5	1050.0	1135.3
145°	356.1	411.7	712.2	990.3	1083.0
147.5°	373.8	416.2	674.7	930.1	1006.8
150°	385.6	416.5	659.5	876.6	971.4
152.5°	395.7	425.0	641.0	827.5	914.0
155°	410.9	441.8	611.0	756.1	834.4
157.5°	426.0	455.7	575.7	702.9	756.0
160°	436.2	460.9	552.1	677.2	712.2
162.5°	444.6	466.0	526.8	633.4	673.4
165°	455.1	467.5	490.9	574.0	613.2
167.5°	464.8	471.0	493.9	515.7	547.4
170°	469.9	476.1	488.8	510.1	520.4
172.5°	474.9	484.4	482.1	496.6	505.3
175°	480.4	490.7	476.2	478.4	482.5
177.5°	481.7	486.6	483.4	483.5	488.4
180°	478.3	478.3	478.3	478.3	478.3



TEST NUMBER: P1439378
 CATALOG NUMBER: CB3-B-030U-055D-927-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.07	17.02	16.94	17.91	19.03	15.00	15.94	15.86	16.83	17.95
	3H	17.75	18.60	18.63	19.49	20.64	16.42	17.27	17.30	18.16	19.31
	4H	18.38	19.19	19.28	20.09	21.24	16.94	17.74	17.83	18.64	19.80
	6H	18.77	19.51	19.68	20.42	21.59	17.26	18.00	18.17	18.91	20.07
	8H	18.91	19.62	19.83	20.54	21.71	17.39	18.09	18.30	19.02	20.18
	12H	18.98	19.65	19.90	20.57	21.76	17.46	18.13	18.38	19.05	20.25
4H	2H	16.49	17.30	17.39	18.20	19.35	15.63	16.44	16.53	17.34	18.49
	3H	18.39	19.06	19.30	19.99	21.16	17.26	17.93	18.17	18.86	20.03
	4H	19.14	19.75	20.06	20.68	21.88	17.87	18.48	18.79	19.41	20.60
	6H	19.65	20.18	20.59	21.13	22.32	18.29	18.81	19.22	19.77	20.96
	8H	19.84	20.33	20.78	21.28	22.49	18.46	18.95	19.40	19.90	21.11
	12H	19.95	20.39	20.90	21.35	22.57	18.57	19.01	19.53	19.98	21.19
8H	4H	19.28	19.77	20.22	20.72	21.93	18.14	18.63	19.08	19.58	20.79
	6H	19.90	20.31	20.87	21.30	22.50	18.67	19.08	19.64	20.07	21.27
	8H	20.18	20.54	21.15	21.52	22.74	18.93	19.28	19.90	20.26	21.49
	12H	20.35	20.66	21.32	21.63	22.91	19.11	19.42	20.08	20.39	21.67
12H	4H	19.26	19.70	20.21	20.66	21.88	18.15	18.59	19.10	19.55	20.77
	6H	19.92	20.28	20.89	21.26	22.48	18.73	19.09	19.70	20.07	21.29
	8H	20.22	20.54	21.20	21.51	22.78	19.02	19.33	19.99	20.30	21.58