

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439466

Luminaire Tested: CB3-B-125U-030D-927-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439466
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-B-125U-030D-927-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
3-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14537.3 lumens
Efficiency: N/A
Efficacy: 133.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 109.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439466

CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

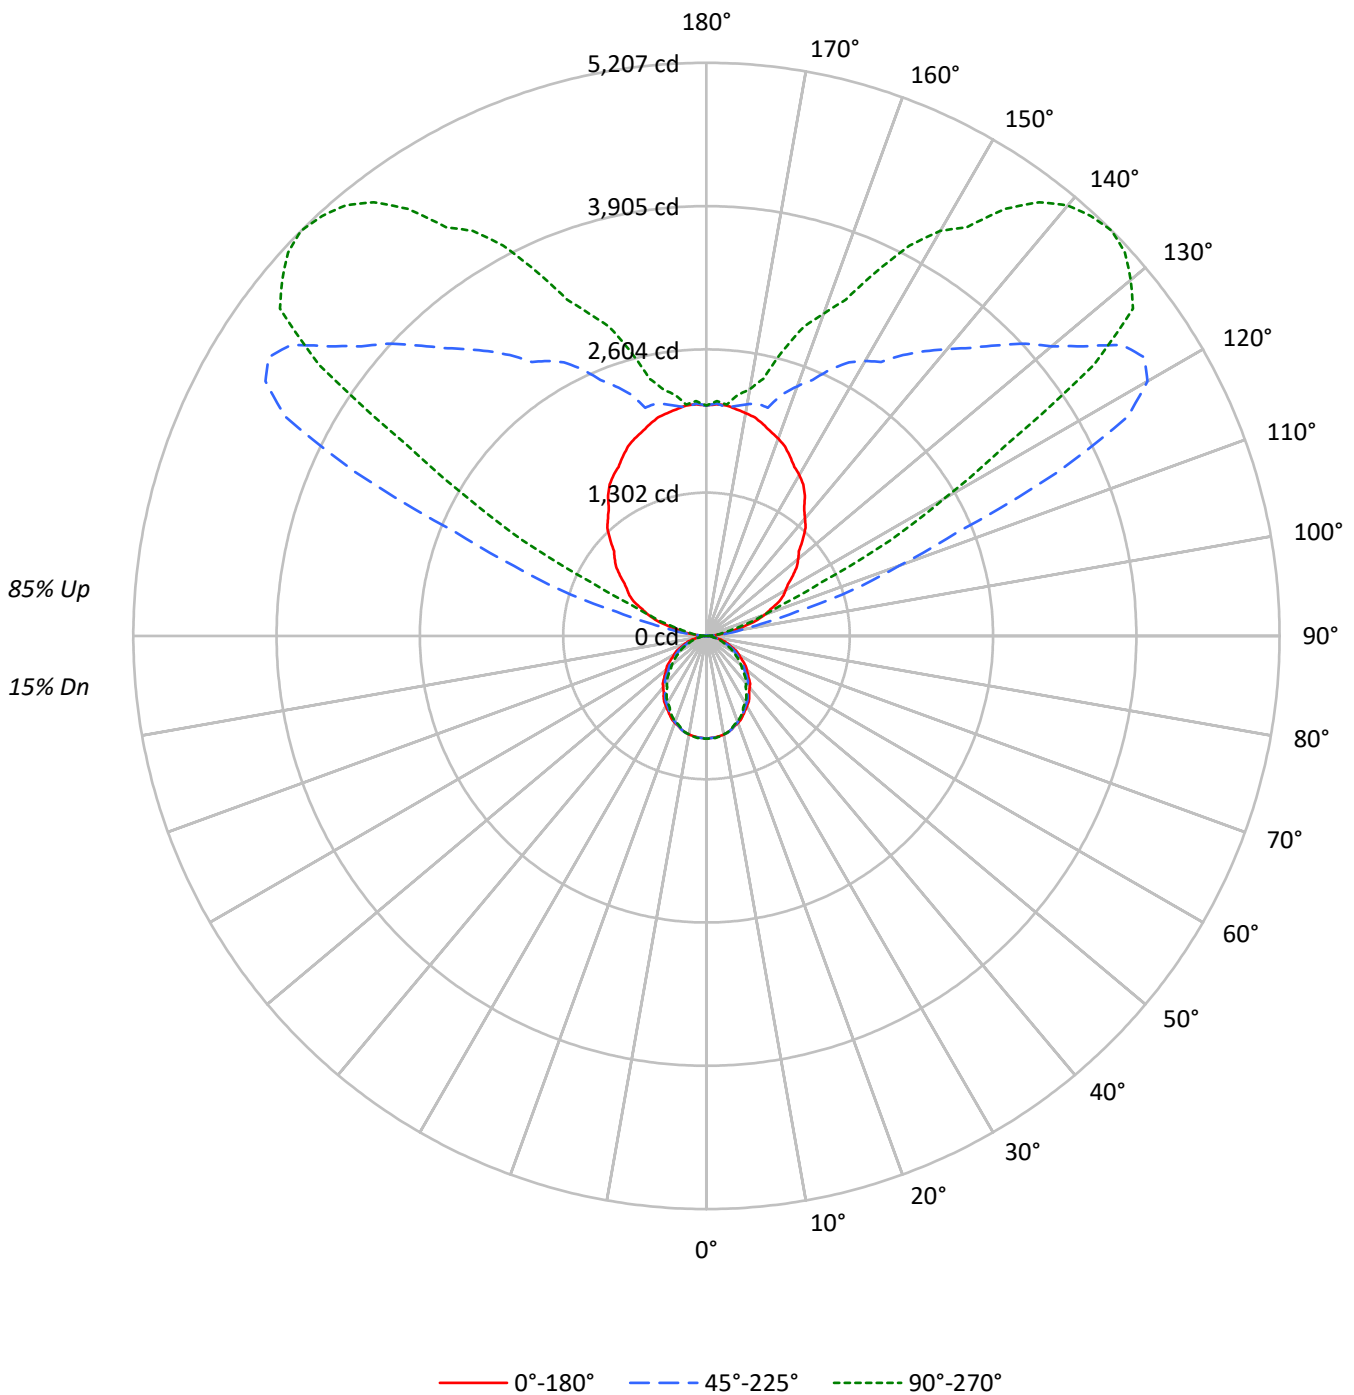



TEST NUMBER: P1439466

CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	99	99	99	99	87	87	87	87	64	64	64	43	43	43	24	24	24	15																				
1	90	86	82	79	79	76	73	70	56	54	52	38	37	36	21	21	21	13																				
2	82	75	69	65	72	66	61	57	49	46	43	33	32	30	19	18	17	11																				
3	75	66	59	54	65	58	52	48	43	40	36	30	27	25	17	16	15	9																				
4	68	58	51	45	60	51	45	40	38	34	31	26	24	22	15	14	13	8																				
5	63	52	44	38	55	46	39	34	34	30	26	23	21	19	14	12	11	7																				
6	57	46	39	33	50	41	34	30	31	26	23	21	18	16	12	11	10	6																				
7	53	41	34	29	46	37	30	26	28	23	20	19	16	14	11	10	9	6																				
8	49	37	30	25	43	33	27	23	25	21	18	17	15	13	10	9	8	5																				
9	45	34	27	22	40	30	24	20	23	19	16	16	13	11	9	8	7	5																				
10	42	31	24	20	37	27	22	18	21	17	14	15	12	10	9	7	6	4																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5275	5275	5275
5°	5251	5255	5285
10°	5228	5220	5220
15°	5148	5148	5117
20°	5064	5012	4968
25°	4936	4874	4788
30°	4816	4690	4577
35°	4689	4515	4354
40°	4520	4304	4119
45°	4367	4117	3863
50°	4209	3894	3614
55°	4037	3678	3377
60°	3851	3454	3110
65°	3636	3201	2829
70°	3386	2903	2519
75°	3069	2549	2245
80°	2675	2137	1984
85°	2064	1805	1805

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4367 cd/sqm



TEST NUMBER: P1439466

CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.0	0.6
10°-20°	247.2	1.7
20°-30°	359.1	2.5
30°-40°	408.3	2.8
40°-50°	396.4	2.7
50°-60°	334.7	2.3
60°-70°	238.1	1.6
70°-80°	127.2	0.9
80°-90°	33.6	0.2
90°-100°	141.5	1.0
100°-110°	741.4	5.1
110°-120°	1866.2	12.8
120°-130°	2879.0	19.8
130°-140°	2635.6	18.1
140°-150°	1945.1	13.4
150°-160°	1239.9	8.5
160°-170°	652.8	4.5
170°-180°	203.2	1.4
0°-30°	694.3	4.8
0°-40°	1102.7	7.6
0°-60°	1833.7	12.6
0°-90°	2232.6	15.4
90°-120°	2749.0	18.9
90°-150°	10208.7	70.2
90°-180°	12305.0	84.6
0°-180°	14537.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	932	932	932	932	932	
5°	925	936	925	924	931	88
15°	879	887	879	874	874	248
25°	791	793	781	770	767	364
35°	679	672	654	634	630	423
45°	546	537	515	490	483	421
55°	409	398	373	349	342	366
65°	272	262	239	218	211	269
75°	140	133	117	105	103	150
85°	32	29	28	28	28	38
90°	0	0	0	0	0	4
95°	74	209	83	46	46	93
105°	378	1171	848	349	286	404
115°	719	1467	3520	1531	1161	700
125°	958	1481	4608	4646	4295	858
135°	1235	1649	3732	5090	5207	954
145°	1558	1801	3115	4332	4737	968
155°	1797	1932	2673	3307	3650	829
165°	1991	2045	2147	2511	2682	561
175°	2101	2146	2083	2092	2110	199
180°	2092	2092	2092	2092	2092	

TEST NUMBER: P1439466

CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	932.5	932.5	932.5	932.5	932.5
2.5°	927.8	937.1	928.8	929.9	932.0
5°	924.6	936.3	925.3	924.1	930.6
7.5°	917.4	928.1	916.6	914.0	919.8
10°	910.0	921.7	908.7	905.5	908.7
12.5°	896.8	909.0	898.6	893.3	896.0
15°	878.9	886.7	878.9	873.6	873.6
17.5°	857.0	865.2	850.6	846.8	845.4
20°	841.1	848.3	832.5	827.2	825.2
22.5°	820.0	826.6	813.5	804.4	801.9
25°	790.8	793.4	780.9	770.2	767.0
27.5°	761.5	762.2	745.0	732.0	727.8
30°	737.2	737.8	718.0	704.0	700.7
32.5°	712.8	710.8	692.0	675.4	673.2
35°	678.9	672.4	653.7	634.4	630.5
37.5°	637.9	634.1	612.0	592.6	586.8
40°	612.0	605.5	582.8	563.5	557.7
42.5°	586.0	578.5	555.3	533.8	527.5
45°	545.8	537.3	514.6	490.0	482.8
47.5°	505.2	496.0	471.0	447.2	439.3
50°	478.2	468.5	442.4	419.1	410.6
52.5°	450.6	440.4	414.3	390.5	383.6
55°	409.3	398.3	372.9	348.9	342.4
57.5°	368.0	357.1	331.8	309.1	301.4
60°	340.4	330.1	305.3	282.6	274.9
62.5°	312.3	302.5	278.3	256.2	248.9
65°	271.6	261.8	239.1	217.8	211.3
67.5°	231.1	222.9	200.4	180.8	175.6
70°	204.7	196.9	175.5	157.5	152.3
72.5°	179.2	170.9	150.6	135.3	131.7
75°	140.4	132.6	116.6	104.6	102.7
77.5°	104.9	98.6	84.6	77.9	76.8
80°	82.1	76.3	65.6	60.9	60.9
82.5°	60.9	56.1	49.1	47.2	47.2
85°	31.8	29.2	27.8	27.8	27.8
87.5°	9.5	9.5	9.0	8.5	8.5
90°	0.0	0.0	0.0	0.0	0.0
92.5°	22.1	51.0	14.7	7.5	14.7
95°	73.7	208.9	82.9	46.1	46.1
97.5°	153.0	466.6	213.8	114.0	103.2
100°	212.0	662.5	331.8	165.5	147.5
102.5°	278.3	858.6	501.3	224.1	191.7
105°	377.9	1170.8	847.9	348.8	285.7
107.5°	488.4	1384.1	1397.1	537.7	433.1
110°	562.2	1472.3	1861.6	705.9	543.7



TEST NUMBER: P1439466

CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	628.5	1495.4	2480.9	962.7	742.8
115°	718.8	1466.8	3520.5	1530.7	1161.2
117.5°	785.2	1396.1	4309.4	2435.1	1878.2
120°	829.4	1397.1	4626.4	3119.3	2497.5
122.5°	881.0	1405.5	4714.9	3798.7	3227.4
125°	958.5	1481.1	4608.0	4646.0	4294.6
127.5°	1035.9	1536.9	4320.4	4994.4	4884.4
130°	1087.5	1574.1	4091.9	5113.0	5031.9
132.5°	1139.1	1611.3	3929.7	5115.8	5157.2
135°	1234.9	1649.4	3732.4	5089.8	5207.0
137.5°	1332.6	1696.7	3548.1	4928.7	5172.0
140°	1391.6	1734.0	3400.7	4754.2	5105.6
142.5°	1458.0	1764.3	3260.6	4592.5	4965.5
145°	1557.5	1800.8	3115.0	4331.5	4737.0
147.5°	1634.9	1820.5	2950.9	4068.1	4403.4
150°	1686.5	1821.7	2884.6	3834.0	4248.5
152.5°	1730.7	1858.7	2803.5	3619.4	3997.9
155°	1797.1	1932.3	2672.6	3307.1	3649.5
157.5°	1863.5	1993.2	2517.8	3074.2	3306.7
160°	1907.7	2015.8	2414.6	2961.8	3115.0
162.5°	1944.6	2038.3	2304.0	2770.6	2945.4
165°	1990.6	2044.7	2147.3	2510.6	2681.8
167.5°	2033.0	2060.1	2160.2	2255.5	2394.3
170°	2055.1	2082.2	2138.1	2231.3	2276.3
172.5°	2077.3	2118.7	2108.6	2172.1	2210.0
175°	2101.2	2146.3	2082.8	2092.4	2110.4
177.5°	2106.8	2128.4	2114.1	2114.6	2136.2
180°	2092.0	2092.0	2092.0	2092.0	2092.0



TEST NUMBER: P1439466
 CATALOG NUMBER: CB3-B-125U-030D-927-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.09	8.71	9.30	9.89	11.58	7.01	7.63	8.22	8.81	10.51
	3H	9.74	10.29	10.95	11.48	13.19	8.41	8.96	9.62	10.15	11.86
	4H	10.36	10.88	11.58	12.07	13.78	8.91	9.44	10.13	10.63	12.34
	6H	10.73	11.21	11.96	12.40	14.12	9.22	9.70	10.45	10.89	12.61
	8H	10.86	11.32	12.09	12.52	14.23	9.33	9.79	10.56	11.00	12.71
	12H	10.92	11.35	12.15	12.55	14.29	9.40	9.83	10.63	11.04	12.77
4H	2H	8.47	8.99	9.70	10.18	11.89	7.61	8.13	8.84	9.32	11.03
	3H	10.34	10.77	11.57	11.99	13.71	9.21	9.64	10.44	10.86	12.58
	4H	11.07	11.48	12.31	12.68	14.42	9.80	10.21	11.03	11.41	13.15
	6H	11.56	11.91	12.80	13.13	14.86	10.20	10.54	11.44	11.77	13.49
	8H	11.75	12.07	12.98	13.28	15.03	10.37	10.69	11.60	11.90	13.65
	12H	11.83	12.13	13.08	13.35	15.10	10.46	10.75	11.71	11.98	13.72
8H	4H	11.18	11.50	12.42	12.72	14.46	10.04	10.37	11.28	11.58	13.32
	6H	11.79	12.06	13.04	13.32	15.06	10.56	10.83	11.81	12.09	13.83
	8H	12.07	12.30	13.32	13.53	15.29	10.81	11.04	12.07	12.28	14.04
	12H	12.22	12.42	13.48	13.65	15.44	10.98	11.18	12.24	12.41	14.20
12H	4H	11.15	11.44	12.39	12.66	14.41	10.04	10.33	11.28	11.55	13.30
	6H	11.81	12.04	13.06	13.27	15.03	10.62	10.85	11.87	12.08	13.84
	8H	12.10	12.30	13.35	13.53	15.32	10.89	11.09	12.15	12.32	14.11