

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439297

Luminaire Tested: CB3-0U-120D-927-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1439297  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB3-0U-120D-927-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE  
3-INCH APERTURE  
DOWNLIGHT 1200 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4633.8 lumens  
Efficiency: N/A  
Efficacy: 120.7 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26  
Luminous Opening: Rectangular (W 0.24' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1439297

CATALOG NUMBER: CB3-OU-120D-927-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

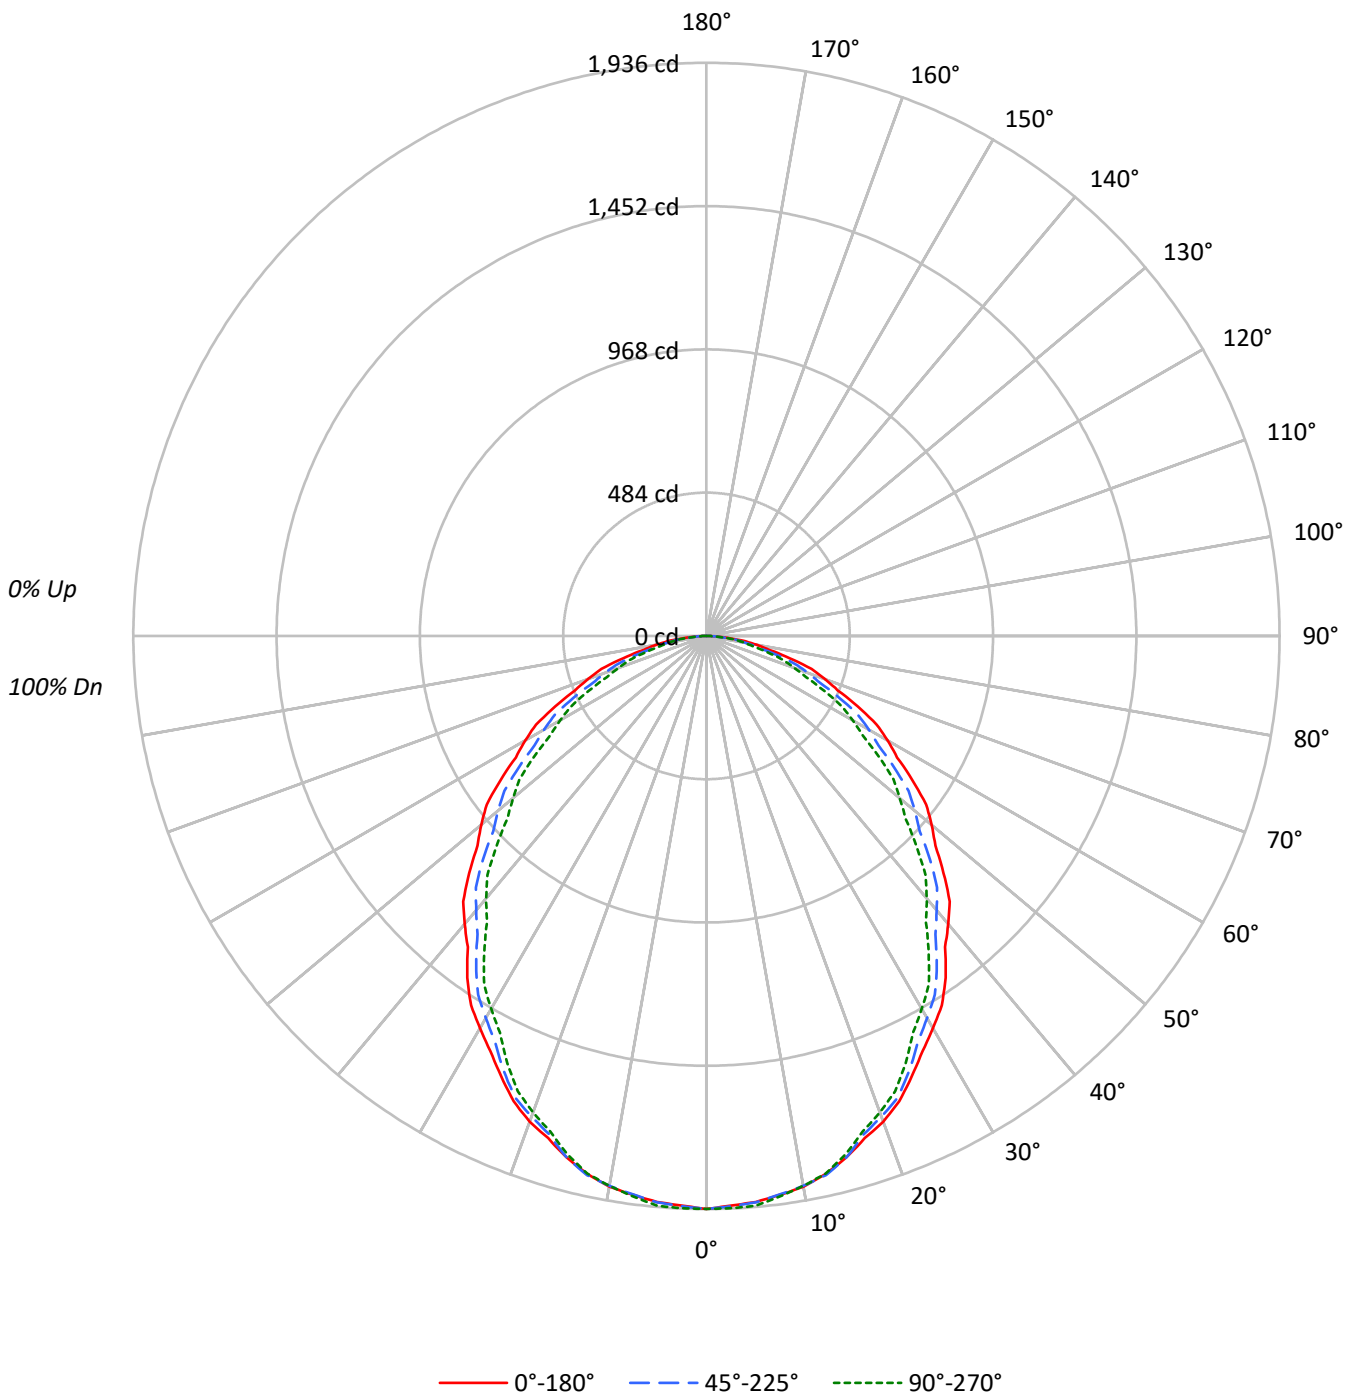



TEST NUMBER: P1439297

CATALOG NUMBER: CB3-OU-120D-927-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	94	92	90	91	89	87	85
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72
3	91	81	74	67	89	80	73	67	77	71	66	74	69	64	72	67	63	61
4	84	72	64	58	82	71	63	57	69	62	56	66	60	56	64	59	55	53
5	78	65	56	50	75	64	56	50	62	55	49	60	54	49	58	53	48	46
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	43	41
7	67	54	45	39	65	53	45	39	51	44	39	50	43	38	48	43	38	36
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	45	39	34	32
9	58	45	37	32	57	45	37	32	43	36	31	42	36	31	41	35	31	29
10	55	42	34	29	53	41	34	29	40	33	29	39	33	29	38	33	28	27

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	21899	21899	21899
5°	21796	21812	21936
10°	21701	21668	21668
15°	21367	21367	21238
20°	21021	20805	20623
25°	20490	20233	19872
30°	19989	19468	19002
35°	19462	18741	18076
40°	18761	17867	17095
45°	18125	17091	16035
50°	17470	16164	15002
55°	16758	15266	14020
60°	15990	14340	12910
65°	15089	13285	11740
70°	14053	12052	10460
75°	12739	10575	9316
80°	11109	8868	8242
85°	8568	7491	7491

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 18125 cd/sqm



TEST NUMBER: P1439297

CATALOG NUMBER: CB3-OU-120D-927-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	182.6	3.9
10°-20°	513.0	11.1
20°-30°	745.4	16.1
30°-40°	847.5	18.3
40°-50°	822.7	17.8
50°-60°	694.6	15.0
60°-70°	494.2	10.7
70°-80°	264.1	5.7
80°-90°	69.8	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1441.1	31.1
0°-40°	2288.5	49.4
0°-60°	3805.8	82.1
0°-90°	4633.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4633.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1936	1936	1936	1936	1936	
5°	1919	1943	1920	1918	1931	182
15°	1824	1840	1824	1813	1813	514
25°	1641	1647	1621	1599	1592	756
35°	1409	1396	1357	1317	1309	878
45°	1133	1115	1068	1017	1002	874
55°	850	827	774	724	711	760
65°	564	543	496	452	438	558
75°	291	275	242	217	213	311
85°	66	61	58	58	58	81
90°	0	0	0	0	0	



TEST NUMBER: P1439297

CATALOG NUMBER: CB3-OU-120D-927-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1935.5	1935.5	1935.5	1935.5	1935.5
2.5°	1925.6	1944.9	1927.8	1930.1	1934.4
5°	1919.0	1943.2	1920.4	1917.9	1931.4
7.5°	1904.1	1926.2	1902.5	1897.0	1909.1
10°	1888.8	1912.9	1886.0	1879.3	1886.0
12.5°	1861.3	1886.5	1865.1	1854.0	1859.6
15°	1824.1	1840.3	1824.1	1813.1	1813.1
17.5°	1778.8	1795.7	1765.3	1757.5	1754.6
20°	1745.8	1760.6	1727.9	1716.8	1712.8
22.5°	1701.8	1715.5	1688.3	1669.5	1664.4
25°	1641.3	1646.7	1620.7	1598.6	1591.8
27.5°	1580.6	1581.9	1546.2	1519.3	1510.5
30°	1530.0	1531.3	1490.1	1461.1	1454.4
32.5°	1479.4	1475.4	1436.2	1401.8	1397.2
35°	1409.0	1395.6	1356.8	1316.7	1308.7
37.5°	1324.1	1316.0	1270.2	1230.0	1217.9
40°	1270.2	1256.7	1209.7	1169.5	1157.4
42.5°	1216.3	1200.7	1152.5	1107.9	1094.8
45°	1132.7	1115.2	1068.1	1016.9	1002.1
47.5°	1048.6	1029.5	977.6	928.1	911.7
50°	992.5	972.3	918.3	869.7	852.3
52.5°	935.3	914.1	860.0	810.4	796.2
55°	849.5	826.7	773.9	724.1	710.7
57.5°	763.7	741.2	688.7	641.6	625.5
60°	706.6	685.1	633.7	586.6	570.5
62.5°	648.3	627.8	577.6	531.6	516.6
65°	563.6	543.4	496.2	452.0	438.5
67.5°	479.7	462.5	416.0	375.3	364.6
70°	424.8	408.6	364.3	326.9	316.2
72.5°	372.0	354.8	312.6	280.8	273.3
75°	291.4	275.3	241.9	217.1	213.1
77.5°	217.7	204.6	175.7	161.6	159.5
80°	170.5	158.4	136.1	126.5	126.5
82.5°	126.5	116.5	102.0	97.9	97.9
85°	66.0	60.6	57.7	57.7	57.7
87.5°	19.8	19.8	18.7	17.6	17.6
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1439297

CATALOG NUMBER: CB3-OU-120D-927-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.72	23.30	22.09	23.62	23.93	20.64	22.22	21.01	22.54	22.85
	3H	23.44	24.86	23.81	25.19	25.55	22.11	23.53	22.48	23.86	24.22
	4H	24.10	25.44	24.50	25.79	26.16	22.65	23.99	23.05	24.34	24.72
	6H	24.52	25.76	24.93	26.12	26.51	23.01	24.25	23.42	24.61	25.00
	8H	24.67	25.86	25.10	26.25	26.65	23.15	24.33	23.57	24.72	25.12
	12H	24.76	25.90	25.19	26.28	26.71	23.25	24.38	23.68	24.76	25.19
4H	2H	22.21	23.55	22.61	23.90	24.27	21.35	22.69	21.75	23.04	23.41
	3H	24.16	25.28	24.57	25.68	26.08	23.03	24.15	23.44	24.55	24.95
	4H	24.94	25.95	25.37	26.36	26.80	23.67	24.67	24.10	25.09	25.52
	6H	25.48	26.36	25.93	26.80	27.26	24.12	25.00	24.57	25.44	25.89
	8H	25.68	26.51	26.15	26.95	27.42	24.30	25.12	24.76	25.57	26.03
	12H	25.82	26.55	26.30	27.03	27.50	24.44	25.18	24.92	25.65	26.12
8H	4H	25.12	25.94	25.58	26.38	26.85	23.98	24.80	24.44	25.25	25.71
	6H	25.77	26.45	26.26	26.94	27.41	24.54	25.22	25.03	25.71	26.18
	8H	26.05	26.66	26.56	27.17	27.65	24.80	25.41	25.31	25.91	26.40
	12H	26.24	26.79	26.75	27.28	27.84	25.00	25.54	25.51	26.04	26.60
12H	4H	25.13	25.86	25.61	26.34	26.81	24.02	24.75	24.50	25.23	25.70
	6H	25.79	26.40	26.30	26.91	27.40	24.60	25.21	25.11	25.72	26.21
	8H	26.12	26.66	26.63	27.15	27.72	24.91	25.46	25.42	25.95	26.51