

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439369

Luminaire Tested: CB3-B-030U-030D-927-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1439369  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-2, G2-2312-242-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB3-B-030U-030D-927-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT  
3-INCH APERTURE  
DOWNLIGHT 300 LUMENS PER FOOT  
UPLIGHT 300 LUMENS PER FOOT  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2522.9 lumens  
Efficiency: N/A  
Efficacy: 151.1 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26  
Luminous Opening: Rectangular (W 0.24' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 16.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1439369

CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

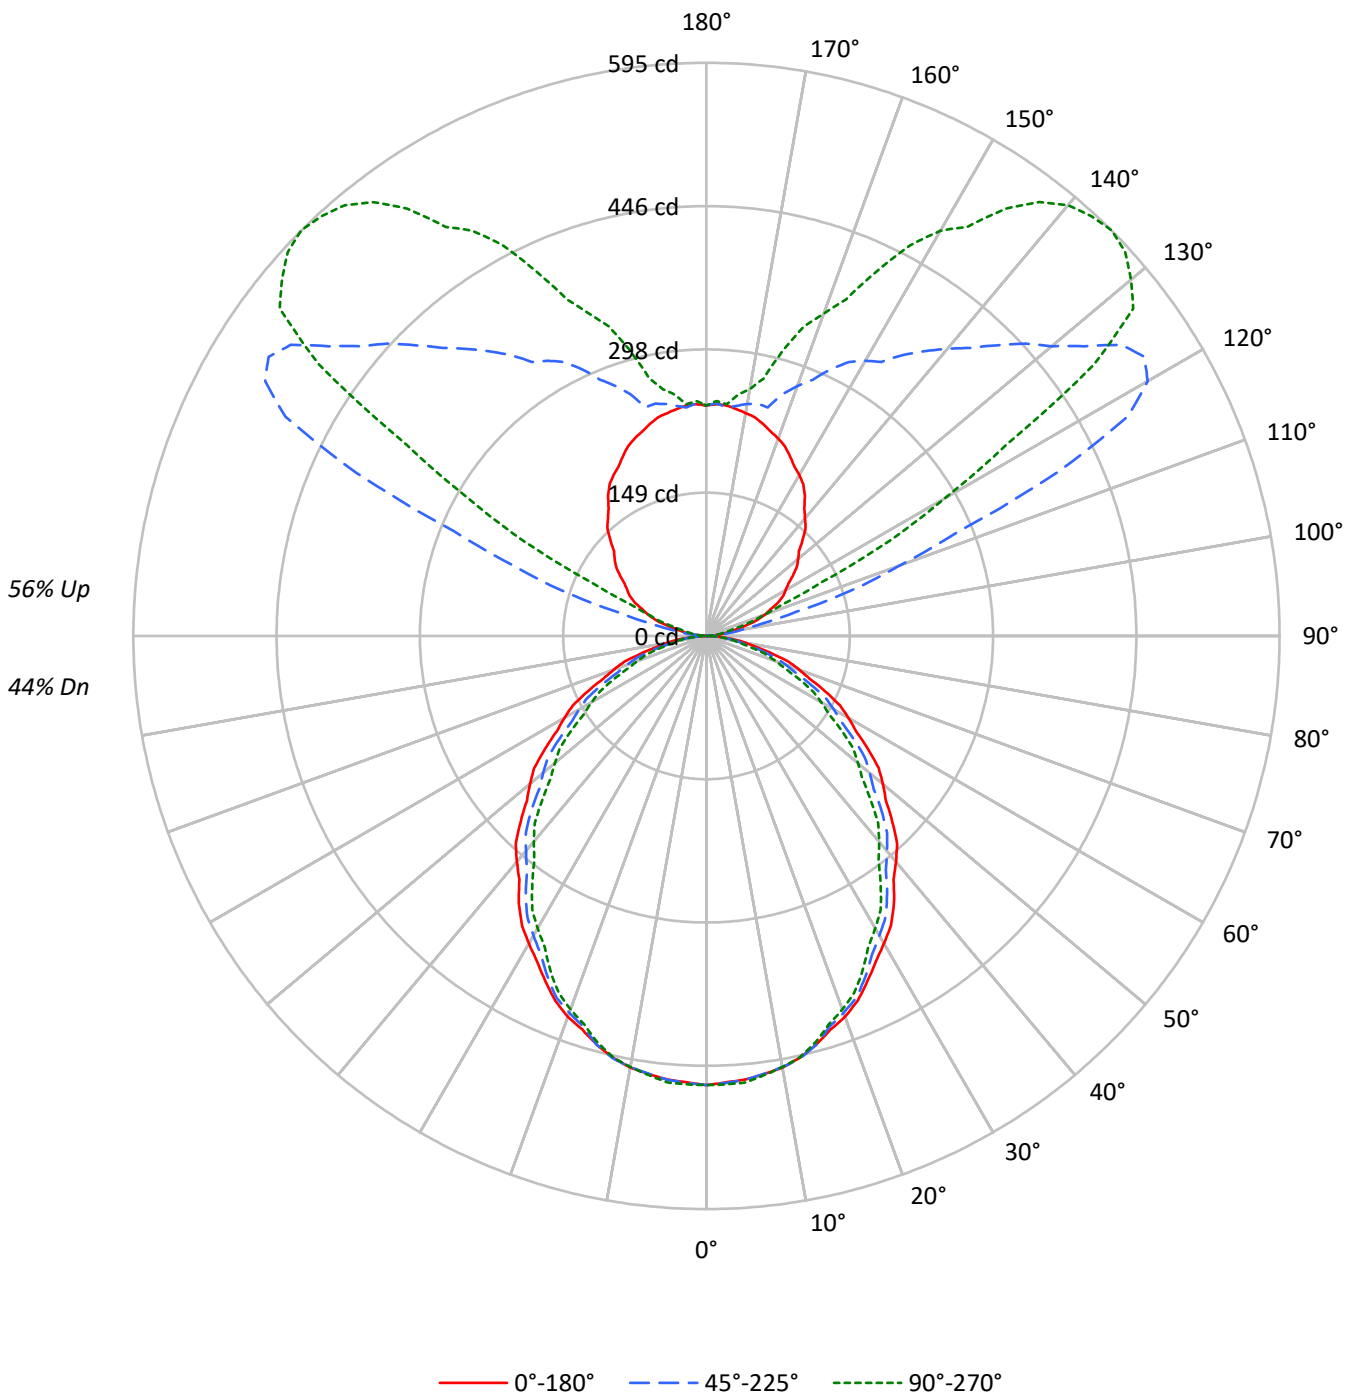



TEST NUMBER: P1439369

CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44																				
1	97	92	89	85	88	85	82	79	70	68	66	57	56	54	45	44	43	38																				
2	88	81	75	70	80	74	69	65	62	58	55	50	48	46	40	38	37	32																				
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	36	33	31	27																				
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23																				
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20																				
6	62	50	42	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18																				
7	58	46	38	32	53	42	35	30	36	30	26	30	26	22	24	21	19	16																				
8	53	41	34	29	49	38	32	27	33	27	23	27	23	20	22	19	17	14																				
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	20	17	15	13																				
10	46	35	28	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5276	5276	5276
5°	5251	5254	5285
10°	5228	5221	5221
15°	5147	5147	5117
20°	5064	5013	4968
25°	4936	4874	4788
30°	4816	4690	4578
35°	4688	4515	4355
40°	4520	4304	4118
45°	4367	4117	3863
50°	4209	3894	3614
55°	4038	3677	3377
60°	3851	3455	3109
65°	3636	3199	2827
70°	3384	2905	2521
75°	3069	2549	2243
80°	2678	2137	1987
85°	2064	1805	1805

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4367 cd/sqm



TEST NUMBER: P1439369

CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.0	1.7
10°-20°	123.6	4.9
20°-30°	179.6	7.1
30°-40°	204.2	8.1
40°-50°	198.2	7.9
50°-60°	167.3	6.6
60°-70°	119.1	4.7
70°-80°	63.6	2.5
80°-90°	16.8	0.7
90°-100°	16.2	0.6
100°-110°	84.7	3.4
110°-120°	213.3	8.5
120°-130°	329.1	13.0
130°-140°	301.3	11.9
140°-150°	222.4	8.8
150°-160°	141.7	5.6
160°-170°	74.6	3.0
170°-180°	23.2	0.9
0°-30°	347.2	13.8
0°-40°	551.3	21.9
0°-60°	916.8	36.3
0°-90°	1116.3	44.2
90°-120°	314.2	12.5
90°-150°	1167.0	46.3
90°-180°	1407.0	55.8
0°-180°	2522.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	466	466	466	466	466	
5°	462	468	463	462	465	44
15°	439	443	439	437	437	124
25°	395	397	390	385	384	182
35°	339	336	327	317	315	212
45°	273	269	257	245	241	210
55°	205	199	186	174	171	183
65°	136	131	120	109	106	134
75°	70	66	58	52	51	75
85°	16	15	14	14	14	19
90°	0	0	0	0	0	1
95°	8	24	10	5	5	11
105°	43	134	97	40	33	46
115°	82	168	402	175	133	80
125°	110	169	527	531	491	98
135°	141	189	427	582	595	109
145°	178	206	356	495	542	111
155°	205	221	306	378	417	95
165°	228	234	246	287	307	64
175°	240	245	238	239	241	23
180°	239	239	239	239	239	



TEST NUMBER: P1439369

CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	466.3	466.3	466.3	466.3	466.3
2.5°	463.9	468.6	464.4	465.0	466.0
5°	462.3	468.1	462.6	462.0	465.3
7.5°	458.7	464.0	458.3	457.0	459.9
10°	455.0	460.8	454.4	452.7	454.4
12.5°	448.4	454.5	449.3	446.6	448.0
15°	439.4	443.3	439.4	436.8	436.8
17.5°	428.5	432.6	425.3	423.4	422.7
20°	420.6	424.1	416.3	413.6	412.6
22.5°	410.0	413.3	406.7	402.2	401.0
25°	395.4	396.7	390.4	385.1	383.5
27.5°	380.8	381.1	372.5	366.0	363.9
30°	368.6	368.9	359.0	352.0	350.4
32.5°	356.4	355.4	346.0	337.7	336.6
35°	339.4	336.2	326.9	317.2	315.3
37.5°	319.0	317.0	306.0	296.3	293.4
40°	306.0	302.8	291.4	281.8	278.8
42.5°	293.0	289.3	277.6	266.9	263.7
45°	272.9	268.7	257.3	245.0	241.4
47.5°	252.6	248.0	235.5	223.6	219.6
50°	239.1	234.2	221.2	209.5	205.3
52.5°	225.3	220.2	207.2	195.2	191.8
55°	204.7	199.2	186.4	174.4	171.2
57.5°	184.0	178.6	165.9	154.6	150.7
60°	170.2	165.0	152.7	141.3	137.4
62.5°	156.2	151.3	139.2	128.1	124.4
65°	135.8	130.9	119.5	108.9	105.6
67.5°	115.6	111.4	100.2	90.4	87.8
70°	102.3	98.4	87.8	78.8	76.2
72.5°	89.6	85.5	75.3	67.6	65.8
75°	70.2	66.3	58.3	52.3	51.3
77.5°	52.5	49.3	42.3	38.9	38.4
80°	41.1	38.1	32.8	30.5	30.5
82.5°	30.5	28.1	24.6	23.6	23.6
85°	15.9	14.6	13.9	13.9	13.9
87.5°	4.8	4.8	4.5	4.2	4.2
90°	0.0	0.0	0.0	0.0	0.0
92.5°	2.5	5.8	1.7	0.9	1.7
95°	8.4	23.9	9.5	5.3	5.3
97.5°	17.5	53.3	24.4	13.0	11.8
100°	24.2	75.7	37.9	18.9	16.9
102.5°	31.8	98.2	57.3	25.6	21.9
105°	43.2	133.8	96.9	39.9	32.7
107.5°	55.8	158.2	159.7	61.5	49.5
110°	64.3	168.3	212.8	80.7	62.2



TEST NUMBER: P1439369

CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	71.9	170.9	283.6	110.0	84.9
115°	82.2	167.7	402.4	175.0	132.7
117.5°	89.8	159.6	492.6	278.4	214.7
120°	94.8	159.7	528.9	356.6	285.5
122.5°	100.7	160.7	539.0	434.3	368.9
125°	109.6	169.3	526.8	531.1	490.9
127.5°	118.4	175.7	493.9	570.9	558.4
130°	124.3	179.9	467.8	584.5	575.2
132.5°	130.2	184.2	449.2	584.8	589.6
135°	141.2	188.6	426.7	581.9	595.2
137.5°	152.3	194.0	405.6	563.4	591.2
140°	159.1	198.2	388.8	543.5	583.7
142.5°	166.7	201.7	372.7	525.0	567.6
145°	178.0	205.9	356.1	495.2	541.5
147.5°	186.9	208.1	337.3	465.1	503.4
150°	192.8	208.2	329.8	438.3	485.7
152.5°	197.9	212.5	320.5	413.8	457.0
155°	205.4	220.9	305.5	378.1	417.2
157.5°	213.0	227.9	287.8	351.4	378.0
160°	218.1	230.4	276.0	338.6	356.1
162.5°	222.3	233.0	263.4	316.7	336.7
165°	227.6	233.7	245.5	287.0	306.6
167.5°	232.4	235.5	246.9	257.8	273.7
170°	234.9	238.0	244.4	255.1	260.2
172.5°	237.5	242.2	241.0	248.3	252.6
175°	240.2	245.4	238.1	239.2	241.3
177.5°	240.8	243.3	241.7	241.7	244.2
180°	239.2	239.2	239.2	239.2	239.2



TEST NUMBER: P1439369  
 CATALOG NUMBER: CB3-B-030U-030D-927-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.37	13.17	13.38	14.19	15.54	11.29	12.10	12.30	13.11	14.46
	3H	14.03	14.75	15.05	15.78	17.15	12.70	13.42	13.72	14.44	15.82
	4H	14.66	15.34	15.69	16.37	17.75	13.22	13.90	14.25	14.92	16.30
	6H	15.04	15.67	16.08	16.70	18.09	13.53	14.16	14.57	15.19	16.58
	8H	15.18	15.77	16.22	16.82	18.21	13.65	14.25	14.70	15.30	16.68
	12H	15.24	15.81	16.29	16.85	18.26	13.73	14.29	14.78	15.33	16.75
4H	2H	12.77	13.45	13.81	14.48	15.86	11.91	12.59	12.95	13.62	15.00
	3H	14.65	15.22	15.70	16.28	17.67	13.53	14.09	14.57	15.15	16.54
	4H	15.40	15.92	16.45	16.97	18.38	14.13	14.65	15.18	15.70	17.11
	6H	15.90	16.35	16.96	17.42	18.83	14.54	14.98	15.60	16.06	17.47
	8H	16.09	16.51	17.15	17.57	19.00	14.71	15.12	15.77	16.19	17.61
	12H	16.19	16.56	17.26	17.64	19.07	14.81	15.19	15.89	16.26	17.70
8H	4H	15.53	15.94	16.59	17.00	18.43	14.39	14.80	15.45	15.87	17.29
	6H	16.14	16.49	17.23	17.59	19.01	14.91	15.26	16.00	16.36	17.79
	8H	16.42	16.72	17.51	17.81	19.25	15.17	15.47	16.26	16.56	18.00
	12H	16.58	16.85	17.68	17.93	19.41	15.34	15.60	16.43	16.69	18.17
12H	4H	15.50	15.87	16.58	16.95	18.38	14.39	14.76	15.47	15.84	17.27
	6H	16.16	16.46	17.25	17.55	18.99	14.97	15.27	16.06	16.36	17.80
	8H	16.46	16.72	17.55	17.81	19.29	15.25	15.52	16.35	16.60	18.08