

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439116

Luminaire Tested: CB3-030U-030D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439116
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-030U-030D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5174.5 lumens
Efficiency: N/A
Efficacy: 149.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 34.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439116

CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

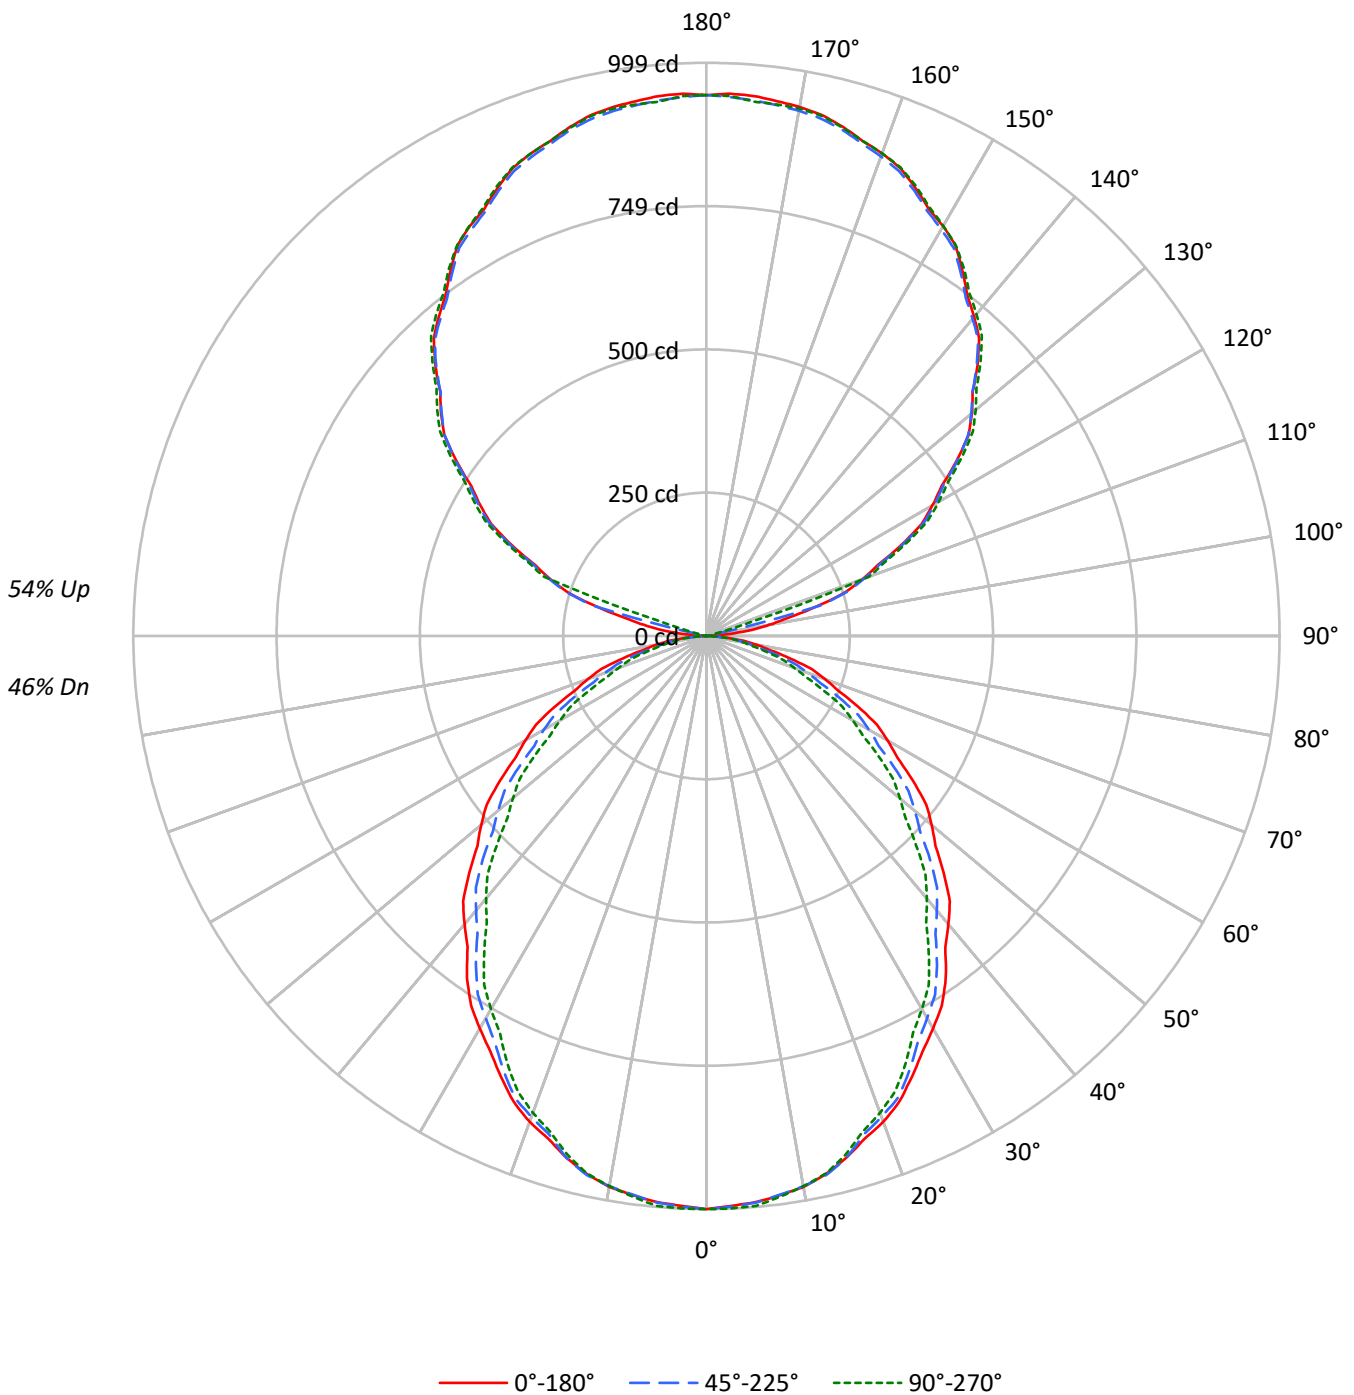



TEST NUMBER: P1439116

CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46				
1	97	93	89	86	89	85	82	79	71	69	67	59	57	56	47	46	45	39				
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	40	38	33				
3	81	72	64	59	74	66	60	55	56	51	47	46	42	40	37	34	32	28				
4	74	63	56	50	68	59	52	46	49	44	40	41	37	34	33	30	28	24				
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21				
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19				
7	58	46	38	32	53	43	36	31	36	31	27	30	26	23	25	22	19	17				
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15				
9	50	38	31	26	46	35	29	24	30	25	21	26	21	19	21	18	16	14				
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	20	17	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5653	5653	5653
5°	5626	5630	5662
10°	5602	5593	5593
15°	5516	5516	5483
20°	5426	5371	5324
25°	5290	5223	5130
30°	5160	5025	4905
35°	5024	4838	4666
40°	4843	4612	4413
45°	4679	4412	4140
50°	4510	4173	3873
55°	4326	3941	3619
60°	4128	3702	3332
65°	3895	3430	3031
70°	3627	3111	2699
75°	3290	2730	2404
80°	2867	2290	2127
85°	2213	1934	1934

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4679 cd/sqm



TEST NUMBER: P1439116

CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.3	1.8
10°-20°	264.9	5.1
20°-30°	384.8	7.4
30°-40°	437.5	8.5
40°-50°	424.7	8.2
50°-60°	358.6	6.9
60°-70°	255.1	4.9
70°-80°	136.3	2.6
80°-90°	36.1	0.7
90°-100°	21.8	0.4
100°-110°	157.6	3.0
110°-120°	374.8	7.2
120°-130°	478.9	9.3
130°-140°	516.5	10.0
140°-150°	486.9	9.4
150°-160°	397.2	7.7
160°-170°	258.8	5.0
170°-180°	89.5	1.7
0°-30°	744.0	14.4
0°-40°	1181.5	22.8
0°-60°	1964.9	38.0
0°-90°	2392.4	46.2
90°-120°	554.2	10.7
90°-150°	2036.6	39.4
90°-180°	2782.0	53.8
0°-180°	5174.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	999	999	999	999	999	
5°	991	1003	991	990	997	94
15°	942	950	942	936	936	265
25°	847	850	837	825	822	390
35°	727	720	700	680	676	453
45°	585	576	551	525	517	451
55°	439	427	400	374	367	392
65°	291	281	256	233	226	288
75°	150	142	125	112	110	160
85°	34	31	30	30	30	40
90°	0	0	0	1	0	3
95°	40	7	9	10	10	49
105°	200	202	205	15	16	211
115°	374	377	378	384	386	369
125°	532	536	534	540	544	475
135°	668	672	666	671	676	515
145°	778	783	773	778	782	487
155°	862	869	857	859	865	397
165°	918	923	914	911	917	259
175°	945	950	937	932	935	90
180°	943	943	943	943	943	

TEST NUMBER: P1439116

CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	999.2	999.2	999.2	999.2	999.2
2.5°	994.1	1004.1	995.3	996.5	998.7
5°	990.7	1003.2	991.4	990.2	997.1
7.5°	983.1	994.4	982.2	979.4	985.6
10°	975.1	987.6	973.7	970.2	973.7
12.5°	960.9	974.0	962.9	957.2	960.1
15°	941.8	950.1	941.8	936.1	936.1
17.5°	918.3	927.1	911.4	907.4	905.8
20°	901.3	908.9	892.1	886.4	884.3
22.5°	878.6	885.7	871.6	861.9	859.3
25°	847.4	850.1	836.7	825.3	821.8
27.5°	816.0	816.7	798.3	784.4	779.8
30°	789.9	790.6	769.3	754.3	750.9
32.5°	763.8	761.7	741.5	723.7	721.3
35°	727.4	720.5	700.5	679.8	675.6
37.5°	683.6	679.4	655.8	635.0	628.8
40°	655.8	648.8	624.5	603.8	597.6
42.5°	627.9	619.9	595.0	572.0	565.2
45°	584.8	575.8	551.4	525.0	517.4
47.5°	541.4	531.5	504.7	479.1	470.7
50°	512.4	502.0	474.1	449.0	440.0
52.5°	482.9	471.9	444.0	418.4	411.1
55°	438.6	426.8	399.6	373.8	366.9
57.5°	394.3	382.6	355.6	331.2	322.9
60°	364.8	353.7	327.2	302.8	294.5
62.5°	334.7	324.1	298.2	274.5	266.7
65°	291.0	280.6	256.2	233.3	226.4
67.5°	247.7	238.8	214.8	193.8	188.2
70°	219.3	211.0	188.1	168.8	163.2
72.5°	192.0	183.2	161.4	145.0	141.1
75°	150.5	142.1	124.9	112.1	110.0
77.5°	112.4	105.6	90.7	83.4	82.3
80°	88.0	81.8	70.3	65.3	65.3
82.5°	65.3	60.2	52.7	50.5	50.5
85°	34.1	31.3	29.8	29.8	29.8
87.5°	10.2	10.2	9.7	9.2	9.1
90°	0.0	0.0	0.0	0.7	0.0
92.5°	10.8	4.1	3.4	4.1	4.0
95°	39.8	7.1	9.2	9.9	9.9
97.5°	80.1	78.6	10.8	12.9	13.1
100°	110.8	114.3	11.4	13.5	14.2
102.5°	144.9	147.8	21.0	14.1	14.8
105°	199.6	202.4	205.3	14.9	15.6
107.5°	254.0	256.1	258.0	232.3	87.0
110°	289.8	291.9	292.7	299.8	301.2



TEST NUMBER: P1439116

CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	323.4	326.0	327.4	333.4	335.9
115°	374.4	377.2	377.9	383.7	385.7
117.5°	422.8	425.7	427.1	431.7	435.0
120°	454.7	458.1	458.9	464.7	467.4
122.5°	485.9	489.9	489.6	494.8	498.7
125°	532.1	535.6	534.2	540.0	543.5
127.5°	576.0	578.1	575.1	582.2	585.1
130°	603.8	605.9	602.4	608.9	612.4
132.5°	629.4	632.6	628.6	634.5	637.9
135°	668.5	672.0	666.4	671.4	675.6
137.5°	703.3	707.5	700.7	706.6	710.3
140°	726.0	730.2	721.8	728.3	732.4
142.5°	747.1	752.3	742.2	748.2	752.9
145°	777.9	782.8	772.9	778.0	782.2
147.5°	807.2	811.3	801.9	805.5	808.4
150°	824.8	828.9	818.4	822.0	825.5
152.5°	839.0	844.8	834.3	836.8	842.0
155°	861.7	868.7	856.7	859.0	864.6
157.5°	882.6	888.9	876.9	878.9	883.7
160°	895.1	901.4	889.4	890.2	895.1
162.5°	904.8	910.5	900.2	898.8	904.8
165°	918.5	923.4	913.6	910.9	917.1
167.5°	930.1	935.6	923.5	921.3	928.4
170°	936.3	941.9	929.2	925.8	933.5
172.5°	940.3	945.3	933.2	928.6	934.6
175°	944.8	949.7	937.0	932.1	934.9
177.5°	946.1	950.0	939.9	935.5	942.1
180°	942.7	942.7	942.7	942.7	942.7



TEST NUMBER: P1439116
 CATALOG NUMBER: CB3-030U-030D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.81	13.63	13.80	14.63	15.95	11.73	12.55	12.72	13.55	14.87
	3H	14.47	15.20	15.47	16.21	17.56	13.14	13.87	14.14	14.88	16.23
	4H	15.10	15.79	16.11	16.81	18.16	13.65	14.35	14.67	15.36	16.72
	6H	15.48	16.12	16.51	17.14	18.51	13.97	14.61	15.00	15.63	16.99
	8H	15.62	16.23	16.65	17.26	18.62	14.09	14.70	15.12	15.73	17.10
	12H	15.68	16.26	16.72	17.29	18.68	14.17	14.74	15.20	15.77	17.16
4H	2H	13.21	13.90	14.23	14.92	16.27	12.35	13.05	13.37	14.06	15.41
	3H	15.10	15.67	16.13	16.72	18.08	13.97	14.54	15.00	15.59	16.95
	4H	15.84	16.37	16.88	17.41	18.80	14.57	15.10	15.61	16.13	17.53
	6H	16.34	16.80	17.39	17.86	19.24	14.98	15.44	16.03	16.49	17.88
	8H	16.53	16.96	17.58	18.01	19.41	15.15	15.58	16.20	16.63	18.03
	12H	16.63	17.01	17.69	18.08	19.48	15.25	15.64	16.32	16.70	18.11
8H	4H	15.97	16.39	17.02	17.44	18.84	14.83	15.25	15.88	16.30	17.71
	6H	16.59	16.94	17.66	18.03	19.43	15.36	15.71	16.43	16.80	18.20
	8H	16.86	17.17	17.94	18.25	19.66	15.61	15.92	16.69	16.99	18.41
	12H	17.02	17.30	18.11	18.37	19.83	15.78	16.05	16.86	17.12	18.58
12H	4H	15.94	16.32	17.01	17.39	18.79	14.83	15.21	15.90	16.28	17.68
	6H	16.60	16.91	17.68	17.99	19.40	15.41	15.72	16.49	16.80	18.22
	8H	16.90	17.17	17.98	18.24	19.70	15.69	15.96	16.78	17.04	18.49