

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439144

Luminaire Tested: CB3-030U-085D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439144
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-030U-085D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 850 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9758.0 lumens
Efficiency: N/A
Efficacy: 139.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 69.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

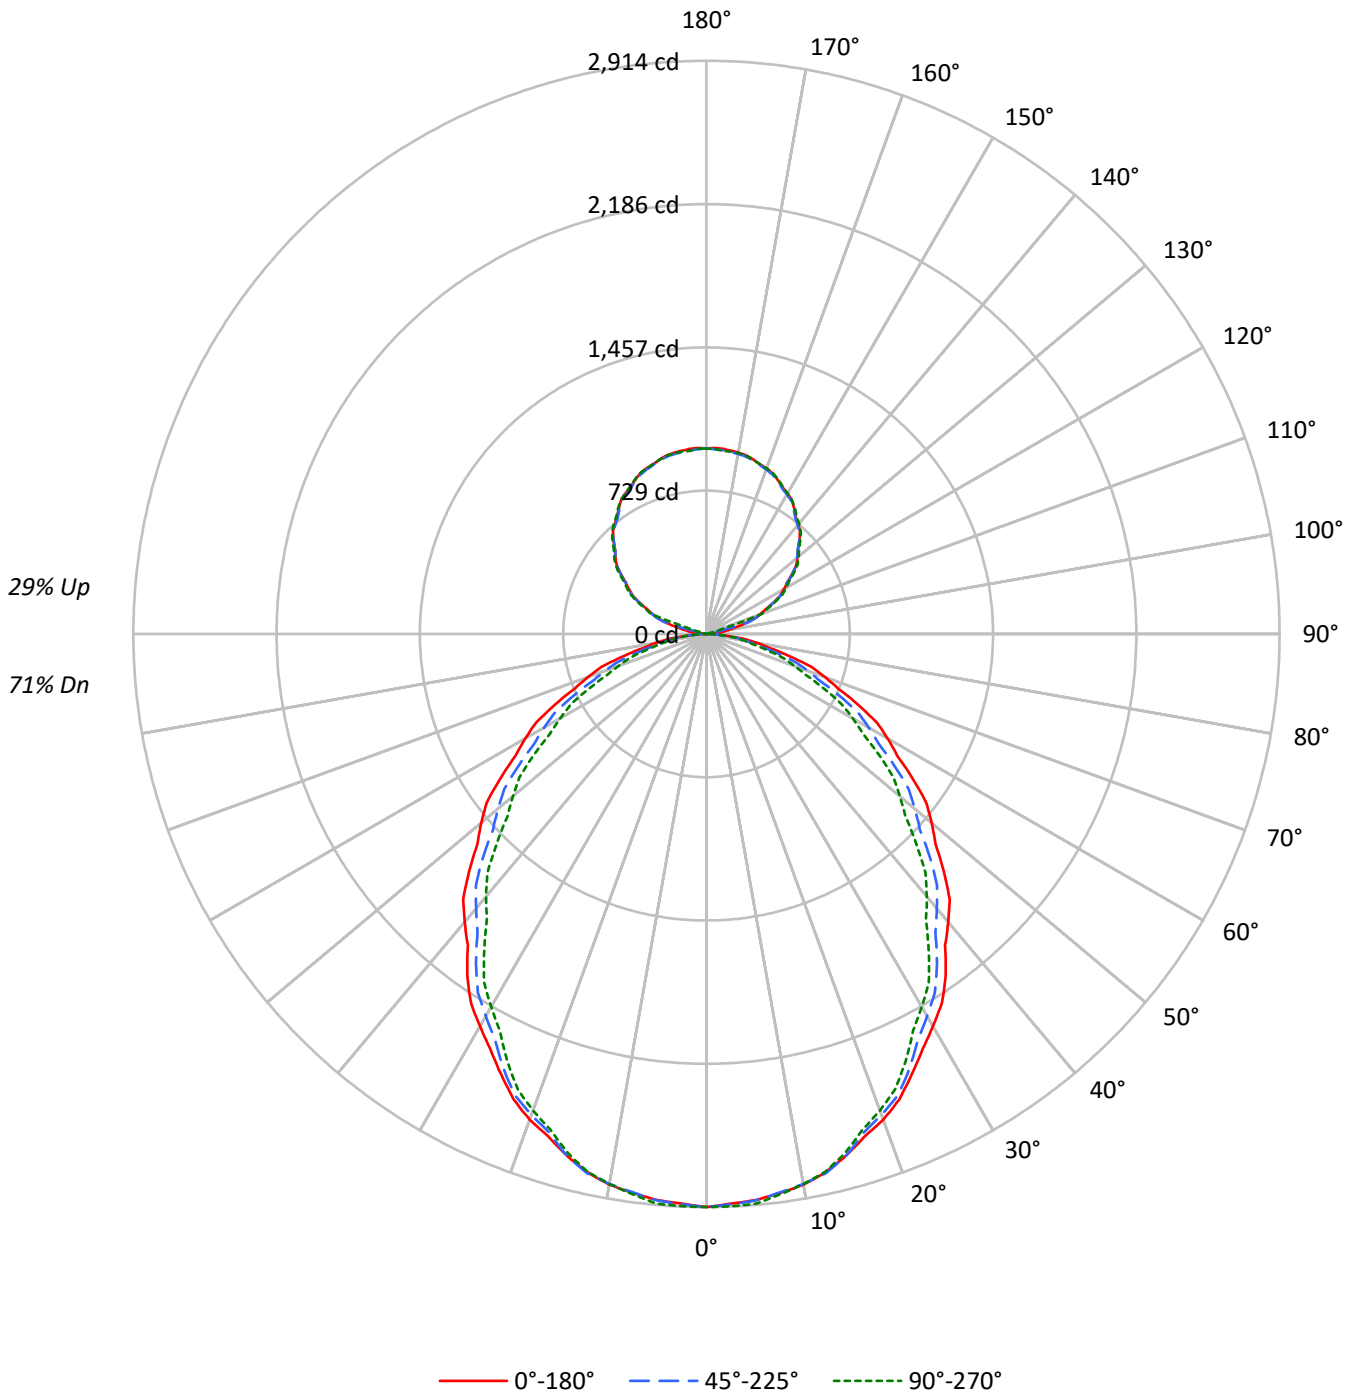



TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									70									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	76	76	76	71													
1	103	98	95	91	97	93	90	87	84	81	79	75	73	72	68	66	65	65	65	65	65	65	65	61													
2	94	86	80	75	89	82	76	72	74	70	66	67	63	60	60	57	55	55	55	55	55	55	55	51													
3	86	76	69	63	81	72	66	60	66	60	56	59	55	51	53	50	47	47	47	47	47	47	47	44													
4	79	68	60	53	74	64	57	52	58	53	48	53	48	44	48	44	41	41	41	41	41	41	41	38													
5	72	61	52	46	68	58	50	45	53	46	42	48	43	39	43	39	36	36	36	36	36	36	36	33													
6	67	55	46	40	63	52	45	39	48	41	36	43	38	34	39	35	32	32	32	32	32	32	32	29													
7	62	49	41	36	59	47	40	34	43	37	32	39	34	30	36	31	28	28	28	28	28	28	28	26													
8	58	45	37	32	55	43	36	31	40	33	29	36	31	27	33	29	25	25	25	25	25	25	25	23													
9	54	41	34	28	51	40	33	28	36	30	26	33	28	25	31	26	23	23	23	23	23	23	23	21													
10	50	38	31	26	48	37	30	25	34	28	24	31	26	22	28	24	21	21	21	21	21	21	21	19													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16484	16484	16484
5°	16406	16418	16511
10°	16334	16310	16310
15°	16084	16084	15987
20°	15823	15660	15523
25°	15424	15230	14959
30°	15046	14654	14302
35°	14649	14106	13606
40°	14121	13449	12868
45°	13643	12864	12070
50°	13150	12167	11292
55°	12614	11492	10553
60°	12035	10794	9717
65°	11358	10001	8836
70°	10576	9071	7873
75°	9589	7961	7012
80°	8360	6675	6203
85°	6446	5641	5641

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13643 cd/sqm



TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	274.9	2.8
10°-20°	772.4	7.9
20°-30°	1122.1	11.5
30°-40°	1275.8	13.1
40°-50°	1238.5	12.7
50°-60°	1045.7	10.7
60°-70°	744.0	7.6
70°-80°	397.5	4.1
80°-90°	105.0	1.1
90°-100°	21.8	0.2
100°-110°	157.6	1.6
110°-120°	374.8	3.8
120°-130°	478.9	4.9
130°-140°	516.5	5.3
140°-150°	486.9	5.0
150°-160°	397.2	4.1
160°-170°	258.8	2.7
170°-180°	89.5	0.9
0°-30°	2169.4	22.2
0°-40°	3445.2	35.3
0°-60°	5729.4	58.7
0°-90°	6975.9	71.5
90°-120°	554.2	5.7
90°-150°	2036.6	20.9
90°-180°	2782.0	28.5
0°-180°	9758.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2914	2914	2914	2914	2914	
5°	2889	2925	2891	2887	2908	274
15°	2746	2770	2746	2730	2730	774
25°	2471	2479	2440	2406	2396	1138
35°	2121	2101	2042	1982	1970	1322
45°	1705	1679	1608	1531	1509	1315
55°	1279	1244	1165	1090	1070	1143
65°	848	818	747	680	660	840
75°	439	414	364	327	321	468
85°	99	91	87	87	87	118
90°	0	0	0	1	0	6
95°	40	7	9	10	10	49
105°	200	202	205	15	16	211
115°	374	377	378	384	386	369
125°	532	536	534	540	544	475
135°	668	672	666	671	676	515
145°	778	783	773	778	782	487
155°	862	869	857	859	865	397
165°	918	923	914	911	917	259
175°	945	950	937	932	935	90
180°	943	943	943	943	943	

TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2913.7	2913.7	2913.7	2913.7	2913.7
2.5°	2898.8	2928.0	2902.1	2905.6	2912.1
5°	2888.9	2925.3	2891.0	2887.3	2907.5
7.5°	2866.5	2899.7	2864.1	2855.8	2874.0
10°	2843.4	2879.8	2839.2	2829.1	2839.2
12.5°	2802.0	2840.0	2807.8	2791.0	2799.5
15°	2746.1	2770.4	2746.1	2729.6	2729.6
17.5°	2677.8	2703.3	2657.5	2645.8	2641.4
20°	2628.2	2650.4	2601.2	2584.6	2578.5
22.5°	2561.9	2582.6	2541.6	2513.3	2505.6
25°	2470.9	2479.0	2439.8	2406.5	2396.4
27.5°	2379.4	2381.4	2327.7	2287.2	2273.9
30°	2303.3	2305.3	2243.2	2199.6	2189.4
32.5°	2227.1	2221.0	2162.1	2110.2	2103.3
35°	2121.1	2100.9	2042.5	1982.2	1970.1
37.5°	1993.3	1981.1	1912.1	1851.7	1833.5
40°	1912.1	1891.9	1821.1	1760.7	1742.4
42.5°	1831.0	1807.5	1735.0	1667.9	1648.1
45°	1705.2	1678.9	1607.9	1530.9	1508.6
47.5°	1578.5	1549.8	1471.8	1397.1	1372.4
50°	1494.1	1463.8	1382.4	1309.3	1283.0
52.5°	1408.0	1376.1	1294.6	1220.1	1198.6
55°	1278.9	1244.5	1165.1	1090.1	1069.9
57.5°	1149.8	1115.8	1036.8	965.9	941.6
60°	1063.7	1031.3	954.0	883.1	858.8
62.5°	975.9	945.2	869.6	800.3	777.7
65°	848.5	818.1	747.1	680.4	660.1
67.5°	722.2	696.3	626.2	565.0	548.8
70°	639.4	615.2	548.4	492.2	476.0
72.5°	560.0	534.1	470.6	422.7	411.4
75°	438.7	414.4	364.2	326.8	320.8
77.5°	327.8	308.0	264.5	243.3	240.1
80°	256.6	238.4	204.9	190.4	190.4
82.5°	190.4	175.4	153.6	147.3	147.3
85°	99.3	91.2	86.9	86.9	86.9
87.5°	29.8	29.8	28.1	26.6	26.5
90°	0.0	0.0	0.0	0.7	0.0
92.5°	10.8	4.1	3.4	4.1	4.0
95°	39.8	7.1	9.2	9.9	9.9
97.5°	80.1	78.6	10.8	12.9	13.1
100°	110.8	114.3	11.4	13.5	14.2
102.5°	144.9	147.8	21.0	14.1	14.8
105°	199.6	202.4	205.3	14.9	15.6
107.5°	254.0	256.1	258.0	232.3	87.0
110°	289.8	291.9	292.7	299.8	301.2

TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	323.4	326.0	327.4	333.4	335.9
115°	374.4	377.2	377.9	383.7	385.7
117.5°	422.8	425.7	427.1	431.7	435.0
120°	454.7	458.1	458.9	464.7	467.4
122.5°	485.9	489.9	489.6	494.8	498.7
125°	532.1	535.6	534.2	540.0	543.5
127.5°	576.0	578.1	575.1	582.2	585.1
130°	603.8	605.9	602.4	608.9	612.4
132.5°	629.4	632.6	628.6	634.5	637.9
135°	668.5	672.0	666.4	671.4	675.6
137.5°	703.3	707.5	700.7	706.6	710.3
140°	726.0	730.2	721.8	728.3	732.4
142.5°	747.1	752.3	742.2	748.2	752.9
145°	777.9	782.8	772.9	778.0	782.2
147.5°	807.2	811.3	801.9	805.5	808.4
150°	824.8	828.9	818.4	822.0	825.5
152.5°	839.0	844.8	834.3	836.8	842.0
155°	861.7	868.7	856.7	859.0	864.6
157.5°	882.6	888.9	876.9	878.9	883.7
160°	895.1	901.4	889.4	890.2	895.1
162.5°	904.8	910.5	900.2	898.8	904.8
165°	918.5	923.4	913.6	910.9	917.1
167.5°	930.1	935.6	923.5	921.3	928.4
170°	936.3	941.9	929.2	925.8	933.5
172.5°	940.3	945.3	933.2	928.6	934.6
175°	944.8	949.7	937.0	932.1	934.9
177.5°	946.1	950.0	939.9	935.5	942.1
180°	942.7	942.7	942.7	942.7	942.7



TEST NUMBER: P1439144

CATALOG NUMBER: CB3-030U-085D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.68	19.75	19.43	20.52	21.45	17.60	18.67	18.35	19.44	20.37
	3H	20.36	21.32	21.12	22.10	23.06	19.03	19.99	19.79	20.77	21.73
	4H	21.00	21.91	21.78	22.70	23.67	19.55	20.47	20.34	21.25	22.23
	6H	21.39	22.23	22.19	23.03	24.02	19.88	20.72	20.68	21.52	22.51
	8H	21.54	22.34	22.34	23.15	24.14	20.01	20.81	20.82	21.63	22.61
	12H	21.61	22.38	22.42	23.19	24.20	20.09	20.86	20.90	21.67	22.68
4H	2H	19.11	20.02	19.89	20.81	21.78	18.25	19.16	19.04	19.95	20.92
	3H	21.02	21.78	21.82	22.60	23.59	19.89	20.65	20.69	21.47	22.46
	4H	21.78	22.47	22.59	23.29	24.30	20.50	21.19	21.32	22.02	23.03
	6H	22.29	22.89	23.12	23.73	24.75	20.93	21.53	21.76	22.37	23.39
	8H	22.49	23.04	23.32	23.89	24.92	21.10	21.66	21.94	22.50	23.54
	12H	22.59	23.09	23.45	23.96	25.00	21.22	21.72	22.07	22.58	23.62
8H	4H	21.92	22.48	22.75	23.32	24.36	20.78	21.34	21.61	22.18	23.22
	6H	22.55	23.01	23.41	23.90	24.93	21.32	21.78	22.18	22.67	23.70
	8H	22.83	23.24	23.70	24.12	25.17	21.57	21.98	22.45	22.86	23.91
	12H	23.00	23.36	23.87	24.23	25.34	21.76	22.12	22.63	22.99	24.10
12H	4H	21.90	22.41	22.76	23.27	24.31	20.79	21.30	21.65	22.16	23.20
	6H	22.57	22.98	23.44	23.86	24.91	21.38	21.79	22.25	22.67	23.72
	8H	22.88	23.24	23.75	24.11	25.21	21.67	22.03	22.54	22.90	24.01