

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439374

Luminaire Tested: CB3-B-030U-030D-935-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439374
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-B-030U-030D-935-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
3-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5406.8 lumens
Efficiency: N/A
Efficacy: 156.3 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 34.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439374

CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

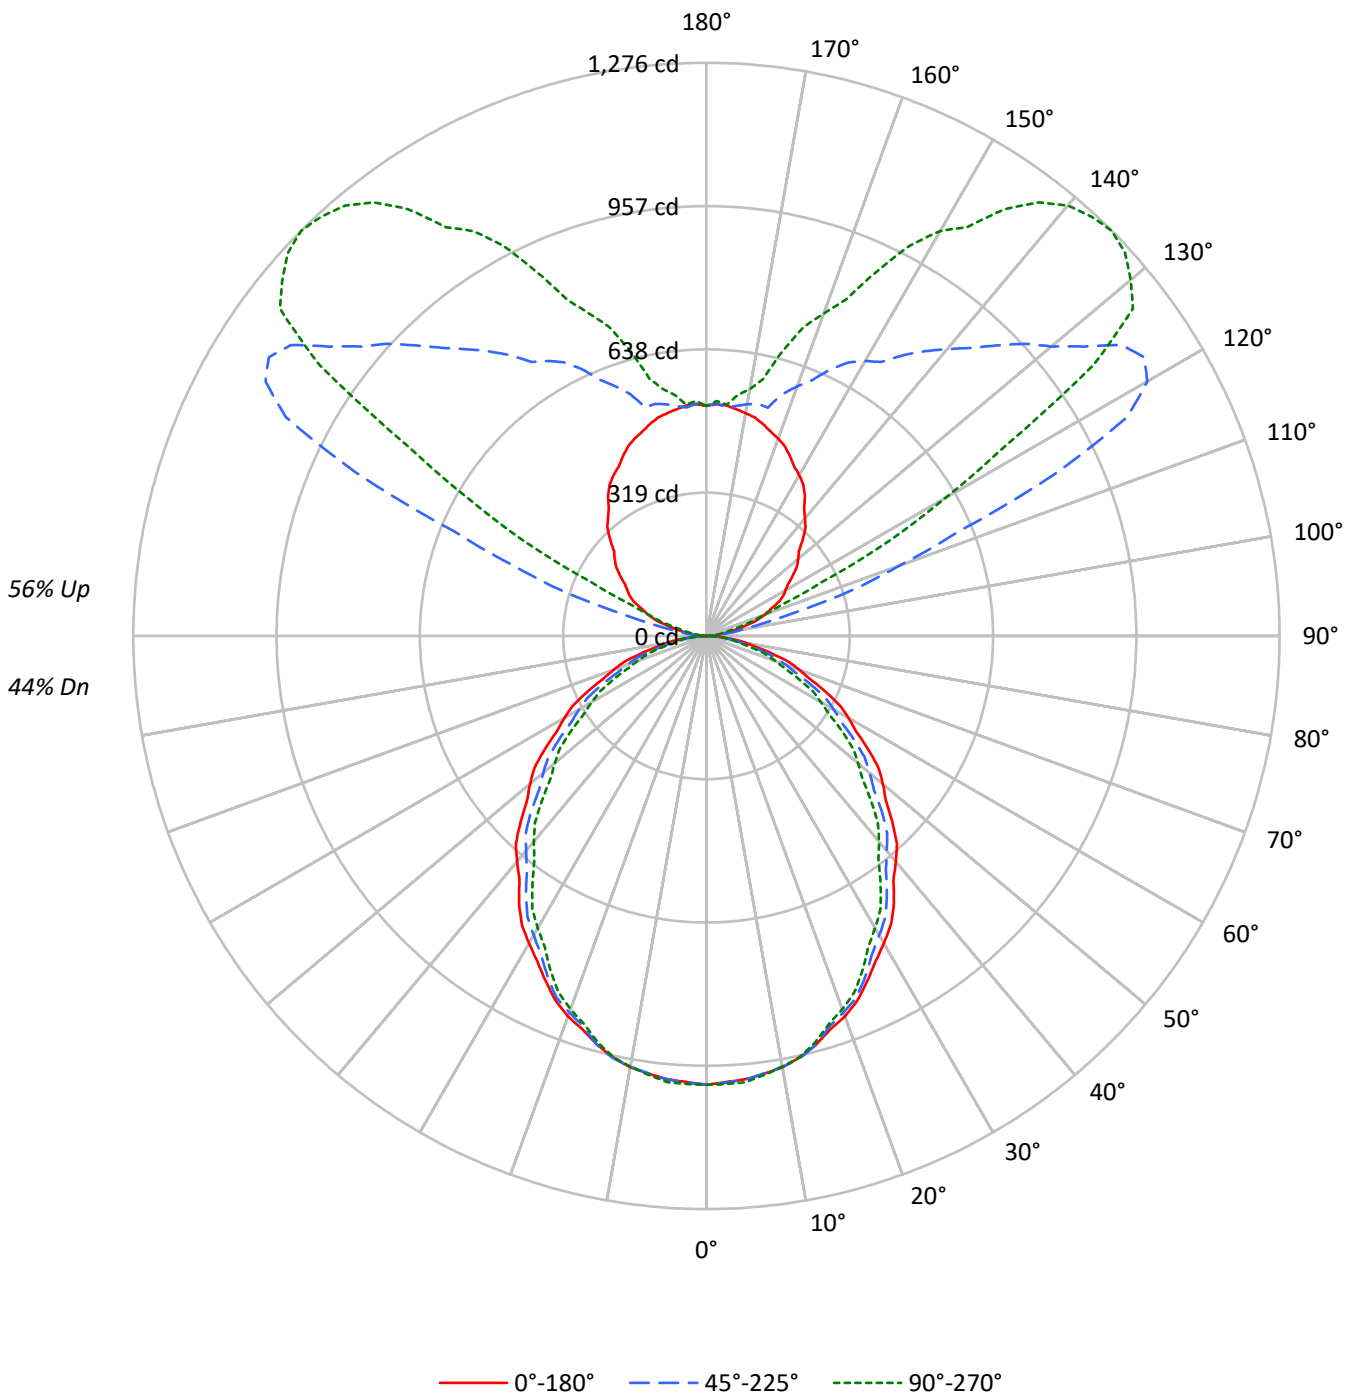



TEST NUMBER: P1439374

CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44
1	97	92	89	85	88	85	82	79	70	68	66	57	56	54	45	44	43	38
2	88	81	75	70	80	74	69	65	62	58	55	50	48	46	40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	36	33	31	27
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	50	42	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	26	22	24	21	19	16
8	53	41	34	29	49	38	32	27	33	27	23	27	23	20	22	19	17	14
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	20	17	15	13
10	46	35	28	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5653	5653	5653
5°	5626	5630	5662
10°	5602	5593	5593
15°	5516	5516	5483
20°	5426	5371	5324
25°	5290	5223	5130
30°	5160	5025	4905
35°	5024	4838	4666
40°	4843	4612	4413
45°	4679	4412	4140
50°	4510	4173	3873
55°	4326	3941	3619
60°	4128	3702	3332
65°	3895	3430	3031
70°	3627	3111	2699
75°	3290	2730	2404
80°	2867	2290	2127
85°	2213	1934	1934

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4679 cd/sqm



TEST NUMBER: P1439374

CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.3	1.7
10°-20°	264.9	4.9
20°-30°	384.8	7.1
30°-40°	437.5	8.1
40°-50°	424.7	7.9
50°-60°	358.6	6.6
60°-70°	255.1	4.7
70°-80°	136.3	2.5
80°-90°	36.0	0.7
90°-100°	34.7	0.6
100°-110°	181.6	3.4
110°-120°	457.2	8.5
120°-130°	705.3	13.0
130°-140°	645.7	11.9
140°-150°	476.5	8.8
150°-160°	303.8	5.6
160°-170°	159.9	3.0
170°-180°	49.8	0.9
0°-30°	744.0	13.8
0°-40°	1181.5	21.9
0°-60°	1964.9	36.3
0°-90°	2392.4	44.2
90°-120°	673.5	12.5
90°-150°	2501.0	46.3
90°-180°	3014.0	55.7
0°-180°	5406.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	999	999	999	999	999	
5°	991	1003	991	990	997	94
15°	942	950	942	936	936	265
25°	847	850	837	825	822	390
35°	727	720	700	680	676	453
45°	585	576	551	525	517	451
55°	439	427	400	374	367	392
65°	291	281	256	233	226	288
75°	150	142	125	112	110	160
85°	34	31	30	30	30	40
90°	0	0	0	0	0	2
95°	18	51	20	11	11	23
105°	93	287	208	85	70	99
115°	176	359	862	375	284	172
125°	235	363	1129	1138	1052	210
135°	302	404	914	1247	1276	234
145°	382	441	763	1061	1160	237
155°	440	473	655	810	894	203
165°	488	501	526	615	657	137
175°	515	526	510	513	517	49
180°	512	512	512	512	512	



TEST NUMBER: P1439374

CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	999.2	999.2	999.2	999.2	999.2
2.5°	994.1	1004.1	995.3	996.5	998.7
5°	990.7	1003.2	991.4	990.2	997.1
7.5°	983.1	994.4	982.2	979.4	985.6
10°	975.1	987.6	973.7	970.2	973.7
12.5°	960.9	974.0	962.9	957.2	960.1
15°	941.8	950.1	941.8	936.1	936.1
17.5°	918.3	927.1	911.4	907.4	905.8
20°	901.3	908.9	892.1	886.4	884.3
22.5°	878.6	885.7	871.6	861.9	859.3
25°	847.4	850.1	836.7	825.3	821.8
27.5°	816.0	816.7	798.3	784.4	779.8
30°	789.9	790.6	769.3	754.3	750.9
32.5°	763.8	761.7	741.5	723.7	721.3
35°	727.4	720.5	700.5	679.8	675.6
37.5°	683.6	679.4	655.8	635.0	628.8
40°	655.8	648.8	624.5	603.8	597.6
42.5°	627.9	619.9	595.0	572.0	565.2
45°	584.8	575.8	551.4	525.0	517.4
47.5°	541.4	531.5	504.7	479.1	470.7
50°	512.4	502.0	474.1	449.0	440.0
52.5°	482.9	471.9	444.0	418.4	411.1
55°	438.6	426.8	399.6	373.8	366.9
57.5°	394.3	382.6	355.6	331.2	322.9
60°	364.8	353.7	327.2	302.8	294.5
62.5°	334.7	324.1	298.2	274.5	266.7
65°	291.0	280.6	256.2	233.3	226.4
67.5°	247.7	238.8	214.8	193.8	188.2
70°	219.3	211.0	188.1	168.8	163.2
72.5°	192.0	183.2	161.4	145.0	141.1
75°	150.5	142.1	124.9	112.1	110.0
77.5°	112.4	105.6	90.7	83.4	82.3
80°	88.0	81.8	70.3	65.3	65.3
82.5°	65.3	60.2	52.7	50.5	50.5
85°	34.1	31.3	29.8	29.8	29.8
87.5°	10.2	10.2	9.7	9.1	9.1
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.4	12.5	3.6	1.8	3.6
95°	18.1	51.2	20.3	11.3	11.3
97.5°	37.5	114.3	52.4	27.9	25.3
100°	51.9	162.3	81.3	40.5	36.1
102.5°	68.2	210.4	122.8	54.9	47.0
105°	92.6	286.8	207.7	85.4	70.0
107.5°	119.7	339.1	342.3	131.7	106.1
110°	137.7	360.7	456.1	172.9	133.2

TEST NUMBER: P1439374

CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	154.0	366.4	607.8	235.8	182.0
115°	176.1	359.3	862.5	375.0	284.5
117.5°	192.4	342.0	1055.7	596.6	460.1
120°	203.2	342.3	1133.4	764.2	611.9
122.5°	215.8	344.3	1155.1	930.6	790.7
125°	234.8	362.8	1128.9	1138.2	1052.1
127.5°	253.8	376.5	1058.4	1223.5	1196.6
130°	266.4	385.6	1002.4	1252.6	1232.7
132.5°	279.1	394.7	962.7	1253.3	1263.4
135°	302.5	404.1	914.4	1246.9	1275.6
137.5°	326.5	415.7	869.2	1207.5	1267.1
140°	340.9	424.8	833.1	1164.7	1250.8
142.5°	357.2	432.2	798.8	1125.1	1216.5
145°	381.6	441.2	763.1	1061.2	1160.5
147.5°	400.5	446.0	722.9	996.6	1078.8
150°	413.2	446.3	706.7	939.3	1040.8
152.5°	424.0	455.4	686.8	886.7	979.4
155°	440.3	473.4	654.8	810.2	894.1
157.5°	456.5	488.3	616.8	753.1	810.1
160°	467.4	493.8	591.5	725.6	763.1
162.5°	476.4	499.3	564.4	678.8	721.6
165°	487.7	500.9	526.1	615.1	657.0
167.5°	498.1	504.7	529.2	552.6	586.6
170°	503.5	510.1	523.8	546.6	557.7
172.5°	508.9	519.1	516.6	532.1	541.4
175°	514.8	525.8	510.3	512.6	517.0
177.5°	516.1	521.4	517.9	518.1	523.4
180°	512.5	512.5	512.5	512.5	512.5



TEST NUMBER: P1439374
 CATALOG NUMBER: CB3-B-030U-030D-935-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.61	13.41	13.62	14.43	15.78	11.53	12.33	12.54	13.35	14.70
	3H	14.27	14.99	15.29	16.01	17.39	12.94	13.66	13.96	14.68	16.06
	4H	14.90	15.58	15.93	16.61	17.99	13.45	14.14	14.48	15.16	16.54
	6H	15.28	15.91	16.32	16.94	18.33	13.77	14.40	14.81	15.43	16.82
	8H	15.42	16.01	16.46	17.06	18.45	13.89	14.49	14.94	15.54	16.92
	12H	15.48	16.05	16.53	17.09	18.50	13.96	14.53	15.01	15.57	16.98
4H	2H	13.01	13.69	14.05	14.72	16.10	12.15	12.83	13.19	13.86	15.24
	3H	14.89	15.46	15.94	16.52	17.91	13.77	14.33	14.81	15.39	16.78
	4H	15.64	16.16	16.69	17.21	18.62	14.37	14.89	15.42	15.94	17.35
	6H	16.14	16.59	17.20	17.66	19.07	14.78	15.22	15.84	16.30	17.71
	8H	16.33	16.75	17.39	17.81	19.24	14.95	15.36	16.01	16.43	17.85
	12H	16.42	16.80	17.50	17.88	19.31	15.05	15.43	16.13	16.50	17.93
8H	4H	15.77	16.18	16.83	17.24	18.67	14.63	15.04	15.69	16.11	17.53
	6H	16.38	16.73	17.47	17.83	19.25	15.15	15.50	16.24	16.60	18.02
	8H	16.66	16.96	17.75	18.05	19.49	15.40	15.71	16.50	16.79	18.24
	12H	16.82	17.09	17.92	18.17	19.65	15.58	15.84	16.67	16.93	18.41
12H	4H	15.74	16.11	16.82	17.19	18.62	14.63	15.00	15.71	16.08	17.51
	6H	16.40	16.70	17.49	17.79	19.23	15.21	15.51	16.30	16.60	18.04
	8H	16.70	16.96	17.79	18.05	19.53	15.49	15.75	16.58	16.84	18.32