

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439285

Luminaire Tested: CB3-0U-055D-935-1D-UNV-STD-W-4

Issue Date: 3/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1439285  
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2312-242-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: CB3-0U-055D-935-1D-UNV-STD-W-4  
Description: CORELITE BASIC SLOT LED LUMINAIRE  
3-INCH APERTURE  
DOWNLIGHT 550 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2285.1 lumens  
Efficiency: N/A  
Efficacy: 136.0 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26  
Luminous Opening: Rectangular (W 0.24' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 16.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1439285

CATALOG NUMBER: CB3-OU-055D-935-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

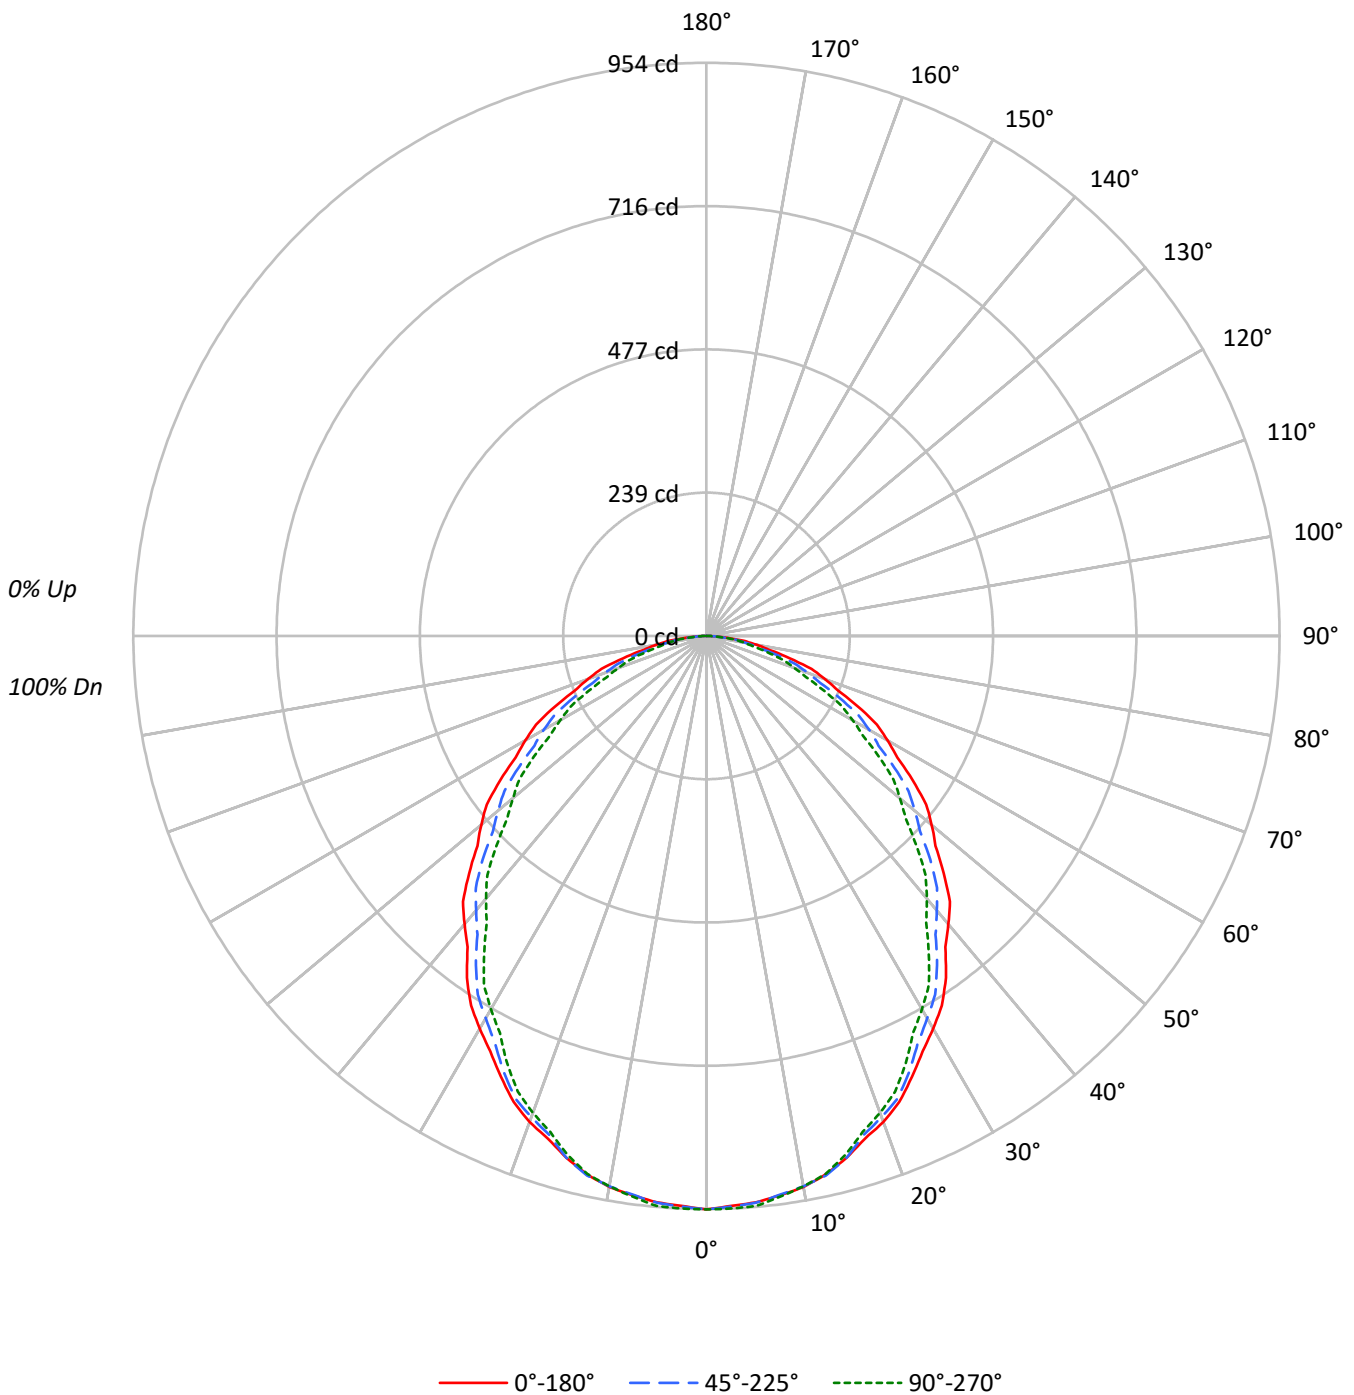



TEST NUMBER: P1439285

CATALOG NUMBER: CB3-OU-055D-935-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	94	92	90	91	89	87	85
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72
3	91	81	74	67	89	80	73	67	77	71	66	74	69	64	72	67	63	61
4	84	72	64	58	82	71	63	57	69	62	56	66	60	56	64	59	55	53
5	78	65	56	50	75	64	56	50	62	55	49	60	54	49	58	53	48	46
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	43	41
7	67	54	45	39	65	53	45	39	51	44	39	50	43	38	48	43	38	36
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	45	39	34	32
9	58	45	37	32	57	45	37	32	43	36	31	42	36	31	41	35	31	29
10	55	42	34	29	53	41	34	29	40	33	29	39	33	29	38	33	28	27

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10800	10800	10800
5°	10748	10756	10817
10°	10701	10686	10686
15°	10538	10538	10473
20°	10366	10260	10170
25°	10105	9977	9800
30°	9857	9600	9370
35°	9597	9242	8913
40°	9252	8810	8431
45°	8938	8428	7908
50°	8615	7970	7398
55°	8263	7528	6914
60°	7884	7072	6366
65°	7440	6551	5788
70°	6931	5941	5157
75°	6282	5215	4595
80°	5480	4372	4066
85°	4219	3700	3700

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8938 cd/sqm



TEST NUMBER: P1439285

CATALOG NUMBER: CB3-OU-055D-935-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	90.1	3.9
10°-20°	253.0	11.1
20°-30°	367.6	16.1
30°-40°	417.9	18.3
40°-50°	405.7	17.8
50°-60°	342.5	15.0
60°-70°	243.7	10.7
70°-80°	130.2	5.7
80°-90°	34.4	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	710.6	31.1
0°-40°	1128.6	49.4
0°-60°	1876.8	82.1
0°-90°	2285.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2285.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	954	954	954	954	954	
5°	946	958	947	946	952	90
15°	900	908	900	894	894	253
25°	809	812	799	788	785	373
35°	695	688	669	649	645	433
45°	559	550	527	502	494	431
55°	419	408	382	357	350	375
65°	278	268	245	223	216	275
75°	144	136	119	107	105	153
85°	32	30	28	28	28	40
90°	0	0	0	0	0	

TEST NUMBER: P1439285

CATALOG NUMBER: CB3-OU-055D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	954.5	954.5	954.5	954.5	954.5
2.5°	949.6	959.1	950.7	951.8	953.9
5°	946.3	958.3	947.0	945.8	952.4
7.5°	939.0	949.9	938.2	935.5	941.4
10°	931.4	943.3	930.1	926.7	930.1
12.5°	917.9	930.3	919.8	914.3	917.0
15°	899.6	907.5	899.6	894.1	894.1
17.5°	877.2	885.5	870.5	866.7	865.3
20°	860.9	868.2	852.1	846.6	844.6
22.5°	839.2	846.0	832.6	823.3	820.8
25°	809.4	812.0	799.2	788.3	785.0
27.5°	779.4	780.1	762.5	749.2	744.9
30°	754.5	755.1	734.8	720.5	717.2
32.5°	729.5	727.5	708.3	691.3	689.0
35°	694.8	688.2	669.1	649.3	645.3
37.5°	652.9	649.0	626.4	606.6	600.6
40°	626.4	619.7	596.5	576.7	570.8
42.5°	599.8	592.1	568.3	546.4	539.9
45°	558.6	550.0	526.7	501.5	494.2
47.5°	517.1	507.7	482.1	457.7	449.6
50°	489.4	479.5	452.8	428.9	420.3
52.5°	461.2	450.8	424.1	399.7	392.6
55°	418.9	407.7	381.6	357.1	350.5
57.5°	376.6	365.5	339.6	316.4	308.4
60°	348.4	337.8	312.5	289.3	281.3
62.5°	319.7	309.6	284.8	262.2	254.7
65°	277.9	268.0	244.7	222.9	216.2
67.5°	236.6	228.1	205.1	185.1	179.8
70°	209.5	201.5	179.6	161.2	155.9
72.5°	183.4	175.0	154.2	138.5	134.8
75°	143.7	135.8	119.3	107.1	105.1
77.5°	107.4	100.9	86.6	79.7	78.6
80°	84.1	78.1	67.1	62.4	62.4
82.5°	62.4	57.5	50.3	48.3	48.3
85°	32.5	29.9	28.5	28.5	28.5
87.5°	9.8	9.8	9.2	8.7	8.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1439285  
 CATALOG NUMBER: CB3-0U-055D-935-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.26	20.85	19.63	21.16	21.47	18.19	19.77	18.55	20.08	20.40
	3H	20.98	22.40	21.36	22.73	23.09	19.65	21.07	20.03	21.40	21.76
	4H	21.64	22.98	22.04	23.33	23.71	20.20	21.54	20.60	21.89	22.26
	6H	22.06	23.30	22.47	23.67	24.06	20.55	21.79	20.96	22.15	22.55
	8H	22.22	23.40	22.64	23.79	24.19	20.69	21.88	21.12	22.26	22.66
	12H	22.31	23.44	22.74	23.82	24.25	20.79	21.92	21.22	22.30	22.73
4H	2H	19.75	21.09	20.15	21.44	21.82	18.89	20.23	19.29	20.58	20.96
	3H	21.70	22.82	22.11	23.22	23.62	20.57	21.69	20.98	22.09	22.49
	4H	22.48	23.49	22.91	23.90	24.34	21.21	22.22	21.64	22.63	23.07
	6H	23.02	23.90	23.48	24.34	24.80	21.66	22.54	22.12	22.98	23.44
	8H	23.23	24.05	23.69	24.49	24.96	21.85	22.67	22.31	23.11	23.58
	12H	23.36	24.10	23.84	24.57	25.04	21.99	22.72	22.47	23.20	23.67
8H	4H	22.66	23.49	23.13	23.93	24.39	21.52	22.35	21.99	22.79	23.26
	6H	23.31	23.99	23.81	24.48	24.96	22.08	22.76	22.58	23.25	23.73
	8H	23.59	24.20	24.10	24.71	25.20	22.34	22.95	22.85	23.46	23.95
	12H	23.79	24.33	24.30	24.82	25.38	22.55	23.09	23.06	23.58	24.14
12H	4H	22.67	23.41	23.15	23.88	24.35	21.56	22.30	22.04	22.77	23.24
	6H	23.33	23.94	23.84	24.45	24.94	22.14	22.76	22.65	23.26	23.75
	8H	23.67	24.21	24.17	24.70	25.26	22.46	23.00	22.97	23.49	24.05