

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439323

Luminaire Tested: CB3-125U-030D-935-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439323
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-125U-030D-935-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7280.5 lumens
Efficiency: N/A
Efficacy: 159.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 45.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

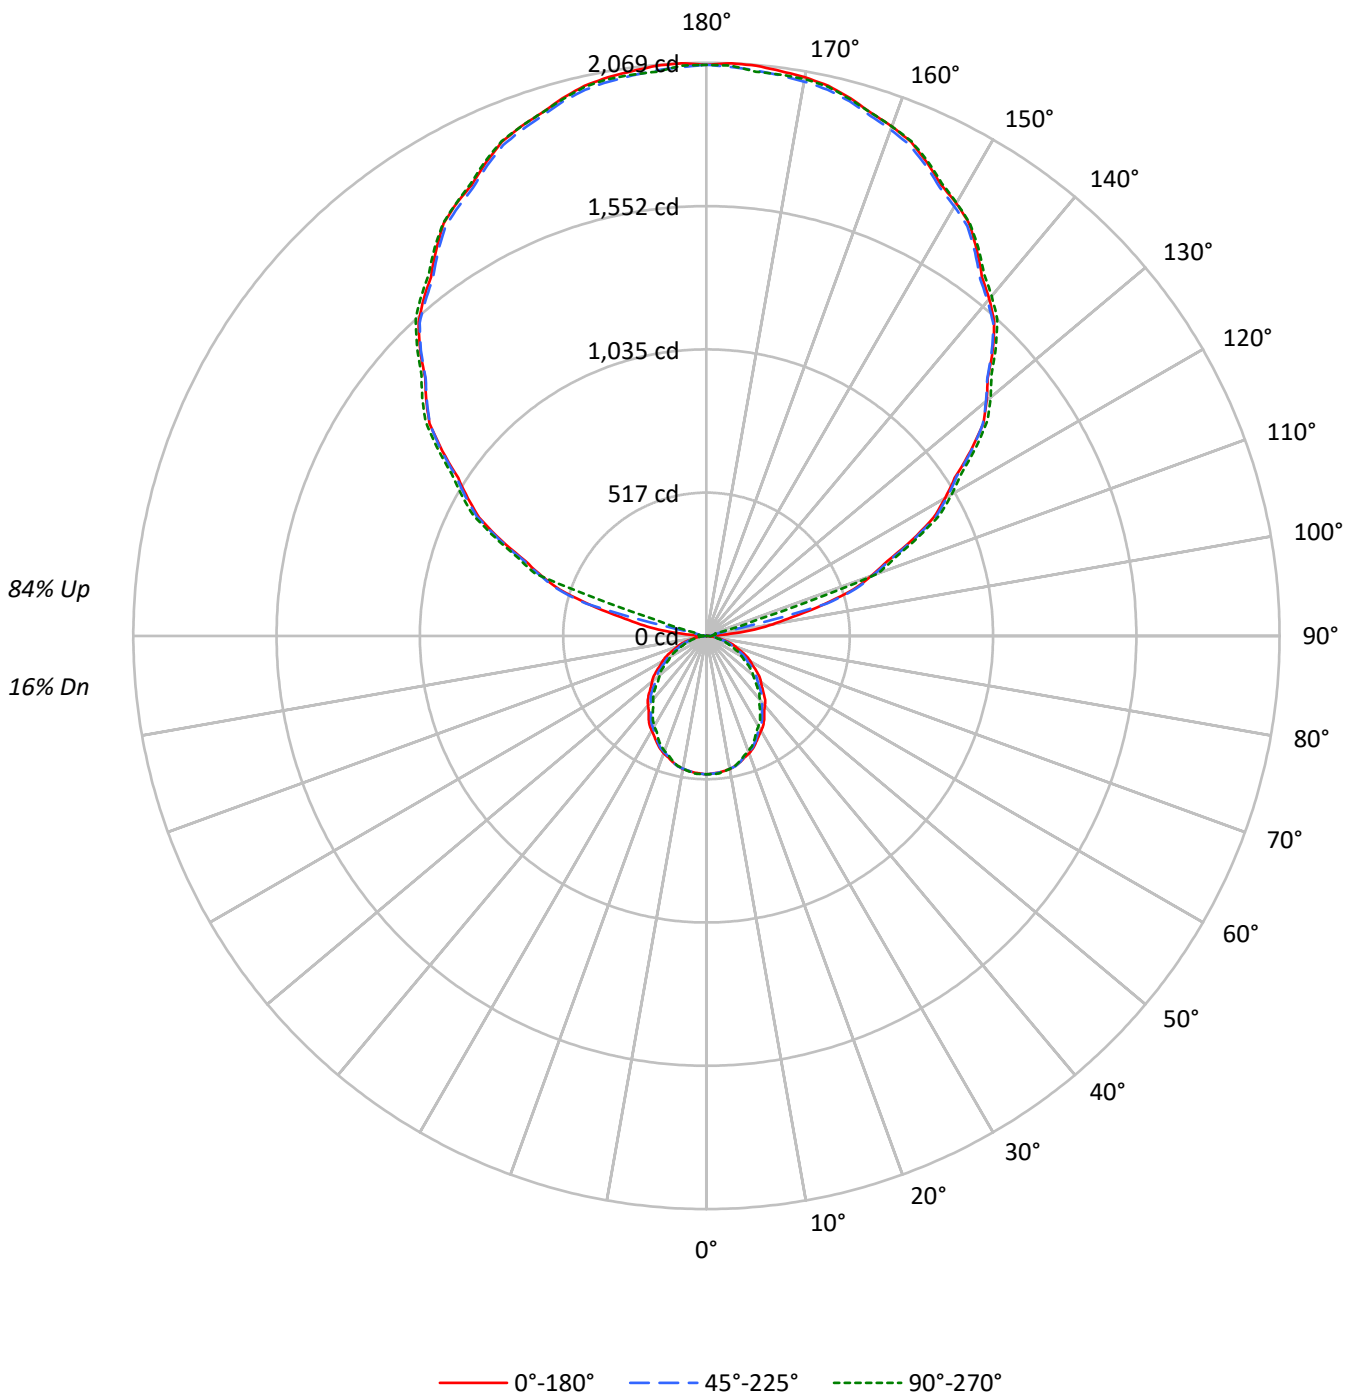



TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	99	99	99	99	87	87	87	87	65	65	65	44	44	44	25	25	25	16																				
1	90	86	83	79	79	76	73	70	57	55	53	39	38	37	22	22	21	14																				
2	82	75	70	65	72	66	62	58	50	46	44	34	32	31	20	19	18	12																				
3	75	66	59	54	66	58	53	48	44	40	37	30	28	26	18	16	15	10																				
4	68	58	51	45	60	52	45	41	39	35	31	27	24	22	16	14	13	9																				
5	63	52	44	39	55	46	39	35	34	30	27	24	21	19	14	13	12	8																				
6	58	46	39	33	50	41	35	30	31	26	23	22	19	17	13	11	10	7																				
7	53	42	34	29	47	37	30	26	28	23	20	19	17	15	12	10	9	6																				
8	49	38	30	25	43	33	27	23	25	21	18	18	15	13	11	9	8	5																				
9	46	34	27	22	40	30	24	20	23	19	16	16	13	11	10	8	7	5																				
10	42	31	24	20	37	28	22	18	21	17	14	15	12	10	9	8	7	4																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5653	5653	5653
5°	5627	5630	5663
10°	5602	5593	5593
15°	5516	5516	5482
20°	5427	5370	5323
25°	5290	5223	5130
30°	5159	5026	4905
35°	5024	4837	4666
40°	4843	4613	4413
45°	4679	4412	4140
50°	4510	4172	3873
55°	4326	3941	3620
60°	4128	3702	3333
65°	3895	3430	3031
70°	3626	3110	2699
75°	3287	2732	2404
80°	2867	2287	2124
85°	2207	1934	1934

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4679 cd/sqm



TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.1	0.6
10°-20°	132.4	1.8
20°-30°	192.4	2.6
30°-40°	218.8	3.0
40°-50°	212.4	2.9
50°-60°	179.3	2.5
60°-70°	127.6	1.8
70°-80°	68.2	0.9
80°-90°	18.1	0.2
90°-100°	47.6	0.7
100°-110°	344.8	4.7
110°-120°	819.7	11.3
120°-130°	1047.2	14.4
130°-140°	1129.6	15.5
140°-150°	1064.9	14.6
150°-160°	868.7	11.9
160°-170°	566.0	7.8
170°-180°	195.7	2.7
0°-30°	372.0	5.1
0°-40°	590.7	8.1
0°-60°	982.4	13.5
0°-90°	1196.2	16.4
90°-120°	1212.1	16.6
90°-150°	4453.9	61.2
90°-180°	6084.0	83.6
0°-180°	7280.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	500	500	500	500	500	
5°	495	502	496	495	499	47
15°	471	475	471	468	468	133
25°	424	425	418	413	411	195
35°	364	360	350	340	338	227
45°	292	288	276	262	259	226
55°	219	213	200	187	184	196
65°	146	140	128	117	113	144
75°	75	71	62	56	55	80
85°	17	16	15	15	15	20
90°	0	0	0	2	0	4
95°	87	16	20	22	22	107
105°	437	443	449	33	34	460
115°	819	825	826	839	844	808
125°	1164	1171	1168	1181	1188	1038
135°	1462	1470	1457	1468	1478	1126
145°	1701	1712	1690	1701	1710	1064
155°	1884	1900	1874	1879	1891	869
165°	2009	2019	1998	1992	2006	567
175°	2066	2077	2049	2038	2044	197
180°	2062	2062	2062	2062	2062	

TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	499.6	499.6	499.6	499.6	499.6
2.5°	497.1	502.1	497.6	498.2	499.3
5°	495.4	501.6	495.7	495.1	498.6
7.5°	491.5	497.2	491.1	489.7	492.8
10°	487.6	493.8	486.8	485.1	486.8
12.5°	480.5	487.0	481.5	478.6	480.0
15°	470.9	475.0	470.9	468.0	468.0
17.5°	459.2	463.5	455.7	453.7	452.9
20°	450.7	454.5	446.0	443.2	442.1
22.5°	439.3	442.8	435.8	431.0	429.6
25°	423.7	425.1	418.4	412.6	410.9
27.5°	408.0	408.3	399.1	392.2	389.9
30°	394.9	395.3	384.7	377.2	375.4
32.5°	381.9	380.8	370.7	361.8	360.7
35°	363.7	360.2	350.2	339.9	337.8
37.5°	341.8	339.7	327.9	317.5	314.4
40°	327.9	324.4	312.3	301.9	298.8
42.5°	314.0	309.9	297.5	286.0	282.6
45°	292.4	287.9	275.7	262.5	258.7
47.5°	270.7	265.7	252.4	239.6	235.3
50°	256.2	251.0	237.0	224.5	220.0
52.5°	241.4	236.0	222.0	209.2	205.5
55°	219.3	213.4	199.8	186.9	183.5
57.5°	197.2	191.3	177.8	165.6	161.5
60°	182.4	176.8	163.6	151.4	147.3
62.5°	167.3	162.1	149.1	137.2	133.4
65°	145.5	140.3	128.1	116.7	113.2
67.5°	123.8	119.4	107.4	96.9	94.1
70°	109.6	105.5	94.0	84.4	81.6
72.5°	96.0	91.6	80.7	72.5	70.5
75°	75.2	71.1	62.5	56.0	55.0
77.5°	56.2	52.8	45.3	41.7	41.2
80°	44.0	40.9	35.1	32.6	32.6
82.5°	32.6	30.1	26.3	25.3	25.3
85°	17.0	15.6	14.9	14.9	14.9
87.5°	5.1	5.1	4.8	4.8	4.5
90°	0.0	0.0	0.0	1.5	0.0
92.5°	23.6	9.0	7.5	9.0	8.7
95°	87.0	15.6	20.2	21.8	21.8
97.5°	175.2	171.9	23.6	28.3	28.6
100°	242.4	250.0	24.9	29.6	31.1
102.5°	316.9	323.3	46.0	30.8	32.3
105°	436.6	442.6	449.0	32.7	34.2
107.5°	555.6	560.1	564.3	507.9	190.2
110°	633.9	638.4	640.1	655.7	658.7

TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	707.2	713.0	715.9	729.1	734.5
115°	818.7	824.8	826.5	839.0	843.6
117.5°	924.7	931.1	934.0	944.1	951.4
120°	994.3	1001.9	1003.6	1016.2	1022.3
122.5°	1062.6	1071.5	1070.7	1082.1	1090.6
125°	1163.6	1171.2	1168.3	1180.9	1188.5
127.5°	1259.6	1264.2	1257.8	1273.1	1279.5
130°	1320.5	1325.1	1317.4	1331.6	1339.2
132.5°	1376.5	1383.5	1374.6	1387.5	1395.1
135°	1461.9	1469.5	1457.3	1468.3	1477.5
137.5°	1538.0	1547.2	1532.5	1545.4	1553.3
140°	1587.8	1596.9	1578.4	1592.6	1601.7
142.5°	1633.7	1645.3	1623.2	1636.2	1646.5
145°	1701.2	1711.8	1690.3	1701.4	1710.5
147.5°	1765.2	1774.3	1753.7	1761.6	1768.0
150°	1803.7	1812.8	1789.7	1797.7	1805.3
152.5°	1834.8	1847.5	1824.5	1830.1	1841.3
155°	1884.5	1899.7	1873.6	1878.6	1890.7
157.5°	1930.2	1943.8	1917.7	1922.0	1932.7
160°	1957.5	1971.2	1945.1	1946.9	1957.5
162.5°	1978.6	1991.1	1968.7	1965.6	1978.6
165°	2008.8	2019.4	1997.9	1992.0	2005.7
167.5°	2033.9	2046.1	2019.7	2014.7	2030.2
170°	2047.6	2059.8	2032.1	2024.7	2041.4
172.5°	2056.3	2067.3	2040.8	2030.8	2043.9
175°	2066.3	2076.9	2049.2	2038.4	2044.5
177.5°	2069.1	2077.6	2055.4	2045.8	2060.4
180°	2061.6	2061.6	2061.6	2061.6	2061.6

TEST NUMBER: P1439323

CATALOG NUMBER: CB3-125U-030D-935-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.59	9.21	9.79	10.38	12.07	7.51	8.13	8.71	9.31	10.99
	3H	10.23	10.79	11.44	11.98	13.67	8.90	9.46	10.11	10.65	12.34
	4H	10.85	11.38	12.07	12.57	14.27	9.41	9.94	10.62	11.12	12.82
	6H	11.23	11.71	12.45	12.90	14.61	9.71	10.20	10.94	11.39	13.10
	8H	11.36	11.82	12.58	13.02	14.72	9.83	10.29	11.05	11.49	13.19
	12H	11.41	11.85	12.64	13.05	14.77	9.90	10.34	11.12	11.53	13.25
4H	2H	8.96	9.49	10.19	10.68	12.38	8.11	8.63	9.33	9.82	11.52
	3H	10.83	11.27	12.06	12.48	14.19	9.70	10.14	10.93	11.35	13.06
	4H	11.57	11.98	12.80	13.17	14.90	10.30	10.71	11.53	11.90	13.63
	6H	12.06	12.41	13.29	13.63	15.34	10.70	11.04	11.93	12.26	13.98
	8H	12.25	12.57	13.47	13.78	15.51	10.86	11.19	12.09	12.40	14.13
	12H	12.33	12.62	13.57	13.85	15.58	10.96	11.25	12.20	12.47	14.21
8H	4H	11.68	12.00	12.91	13.22	14.95	10.54	10.87	11.77	12.08	13.81
	6H	12.29	12.56	13.54	13.81	15.54	11.06	11.33	12.30	12.58	14.31
	8H	12.56	12.79	13.81	14.02	15.77	11.31	11.54	12.56	12.77	14.52
	12H	12.72	12.92	13.97	14.15	15.92	11.48	11.68	12.73	12.91	14.68
12H	4H	11.64	11.94	12.88	13.16	14.89	10.53	10.83	11.77	12.05	13.78
	6H	12.31	12.54	13.55	13.76	15.52	11.12	11.35	12.36	12.57	14.32
	8H	12.59	12.80	13.85	14.02	15.80	11.39	11.59	12.64	12.82	14.59