

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439160

Luminaire Tested: CB3-030U-120D-940-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439160
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-030U-120D-940-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 1200 LUMENS PER FOOT
UPLIGHT 300 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13454.2 lumens
Efficiency: N/A
Efficacy: 142.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 94.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439160

CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

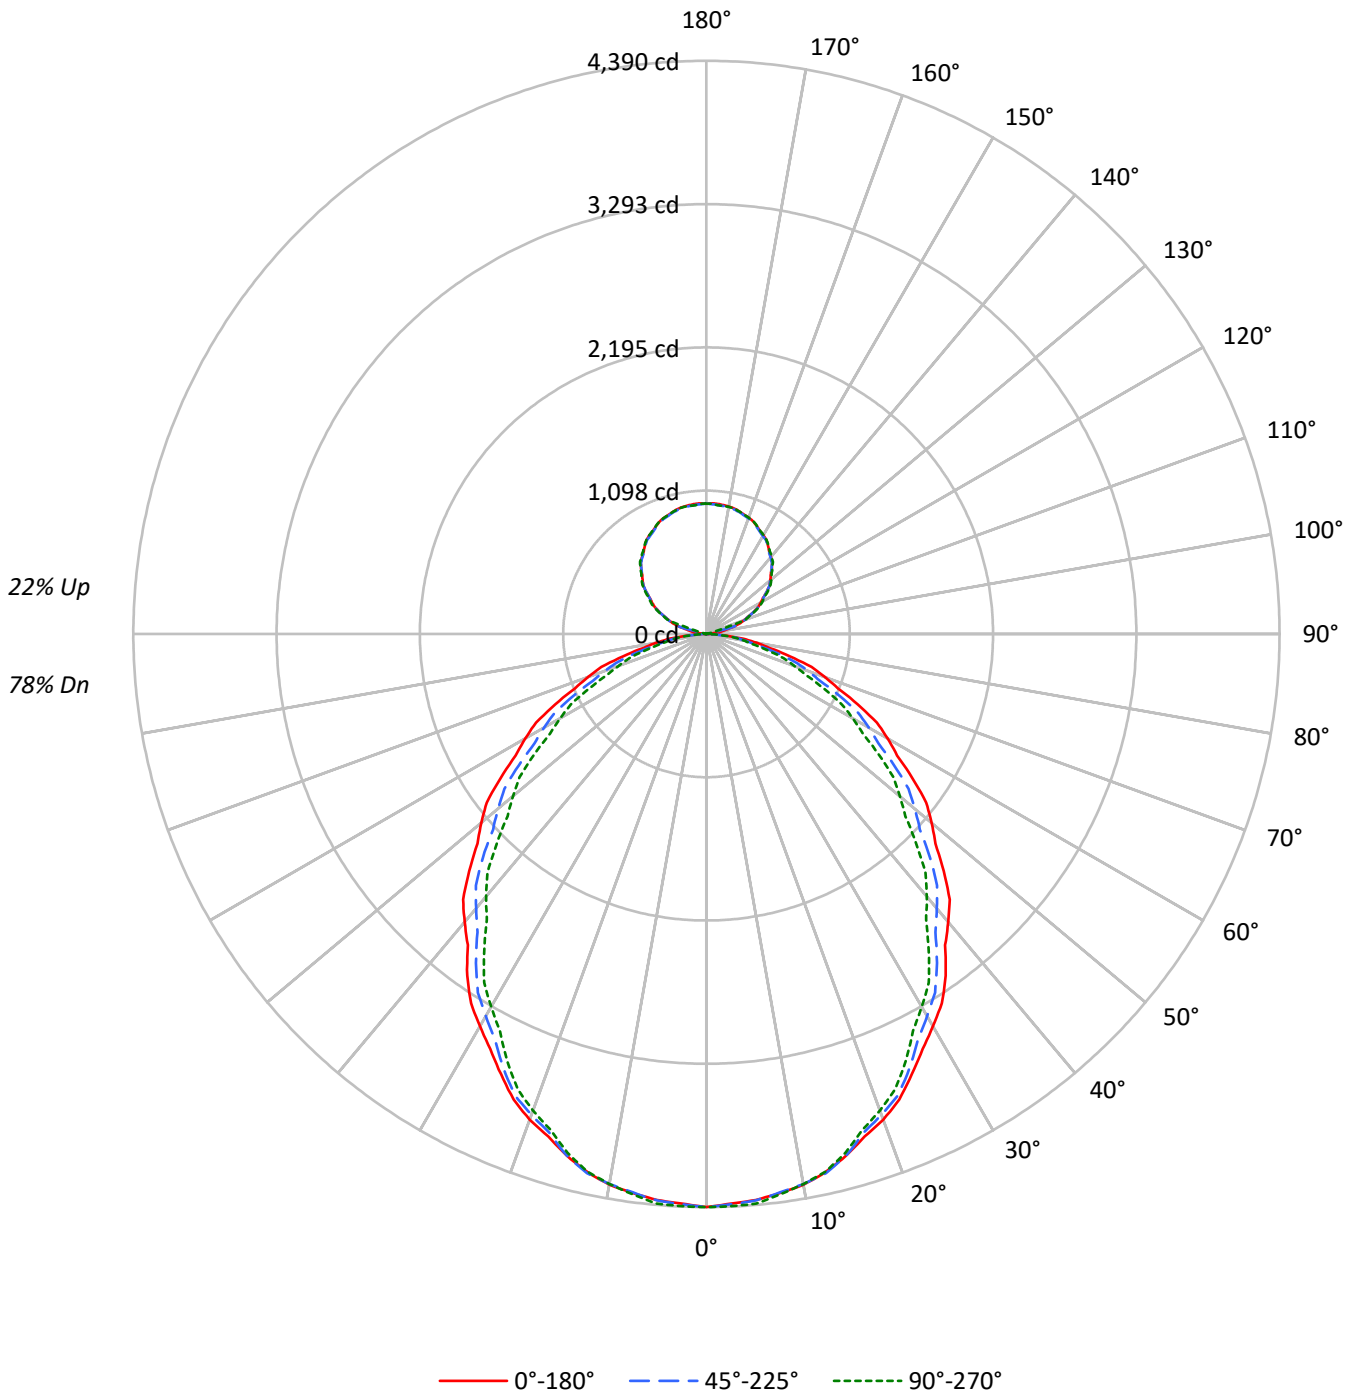



TEST NUMBER: P1439160

CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	114	114	114	114	109	109	109	109	99	99	99	90	90	90	82	82	82	78				
1	104	100	96	92	99	96	92	89	87	85	82	80	78	76	73	71	70	66				
2	95	88	81	76	91	84	78	73	77	72	69	70	67	64	65	62	59	56				
3	87	77	70	64	83	74	67	62	68	63	58	63	58	54	57	54	51	48				
4	80	69	61	54	76	66	59	53	61	55	50	56	51	47	52	47	44	41				
5	74	62	53	47	70	59	52	46	55	48	43	51	45	41	47	42	39	36				
6	68	56	47	41	65	53	46	40	50	43	38	46	40	36	42	38	34	32				
7	63	50	42	36	60	49	41	36	45	39	34	42	36	32	39	34	30	28				
8	59	46	38	32	56	44	37	32	41	35	30	38	33	29	36	31	27	25				
9	55	42	34	29	52	41	34	29	38	32	27	35	30	26	33	28	25	23				
10	51	39	31	26	49	38	31	26	35	29	25	33	28	24	31	26	23	21				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24834	24834	24834
5°	24717	24734	24876
10°	24609	24572	24572
15°	24232	24232	24085
20°	23838	23594	23387
25°	23237	22945	22537
30°	22668	22077	21548
35°	22070	21252	20499
40°	21275	20262	19387
45°	20554	19381	18184
50°	19811	18330	17013
55°	19004	17313	15898
60°	18132	16262	14640
65°	17112	15066	13314
70°	15935	13666	11861
75°	14448	11994	10564
80°	12595	10057	9344
85°	9717	8497	8497

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20554 cd/sqm



TEST NUMBER: P1439160

CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.2	3.1
10°-20°	1163.6	8.6
20°-30°	1690.6	12.6
30°-40°	1922.1	14.3
40°-50°	1865.9	13.9
50°-60°	1575.4	11.7
60°-70°	1120.8	8.3
70°-80°	598.9	4.5
80°-90°	158.2	1.2
90°-100°	23.0	0.2
100°-110°	166.9	1.2
110°-120°	396.7	2.9
120°-130°	506.8	3.8
130°-140°	546.7	4.1
140°-150°	515.3	3.8
150°-160°	420.4	3.1
160°-170°	273.9	2.0
170°-180°	94.7	0.7
0°-30°	3268.4	24.3
0°-40°	5190.5	38.6
0°-60°	8631.8	64.2
0°-90°	10509.8	78.1
90°-120°	586.6	4.4
90°-150°	2155.4	16.0
90°-180°	2944.0	21.9
0°-180°	13454.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4390	4390	4390	4390	4390	
5°	4352	4407	4356	4350	4380	413
15°	4137	4174	4137	4112	4112	1165
25°	3723	3735	3676	3626	3610	1715
35°	3196	3165	3077	2986	2968	1991
45°	2569	2529	2422	2306	2273	1982
55°	1927	1875	1755	1642	1612	1723
65°	1278	1232	1126	1025	995	1266
75°	661	624	549	492	483	705
85°	150	138	131	131	131	177
90°	0	0	0	1	0	8
95°	42	8	10	10	10	52
105°	211	214	217	16	16	223
115°	396	399	400	406	408	391
125°	563	567	565	572	575	503
135°	708	711	705	711	715	545
145°	823	828	818	823	828	515
155°	912	919	907	909	915	421
165°	972	977	967	964	971	274
175°	1000	1005	992	986	989	95
180°	998	998	998	998	998	

TEST NUMBER: P1439160

CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4389.8	4389.8	4389.8	4389.8	4389.8
2.5°	4367.3	4411.2	4372.3	4377.5	4387.3
5°	4352.4	4407.2	4355.5	4350.0	4380.4
7.5°	4318.7	4368.7	4315.0	4302.5	4329.9
10°	4283.8	4338.7	4277.5	4262.3	4277.5
12.5°	4221.4	4278.7	4230.2	4204.9	4217.7
15°	4137.3	4173.8	4137.3	4112.3	4112.3
17.5°	4034.4	4072.8	4003.8	3986.2	3979.5
20°	3959.5	3993.1	3919.0	3893.9	3884.7
22.5°	3859.8	3890.9	3829.2	3786.6	3775.0
25°	3722.6	3734.8	3675.8	3625.6	3610.4
27.5°	3584.8	3587.8	3506.8	3445.9	3425.8
30°	3470.1	3473.1	3379.6	3313.8	3298.6
32.5°	3355.3	3346.2	3257.4	3179.2	3168.9
35°	3195.7	3165.2	3077.2	2986.4	2968.1
37.5°	3003.0	2984.7	2880.8	2789.8	2762.3
40°	2880.8	2850.3	2743.6	2652.6	2625.1
42.5°	2758.6	2723.2	2613.9	2512.8	2483.0
45°	2569.0	2529.4	2422.5	2306.4	2272.8
47.5°	2378.2	2334.9	2217.3	2104.9	2067.7
50°	2251.0	2205.3	2082.7	1972.6	1933.0
52.5°	2121.3	2073.1	1950.5	1838.1	1805.8
55°	1926.8	1874.9	1755.3	1642.4	1611.9
57.5°	1732.2	1681.0	1562.0	1455.2	1418.6
60°	1602.5	1553.7	1437.3	1330.4	1293.9
62.5°	1470.3	1424.0	1310.1	1205.8	1171.6
65°	1278.3	1232.5	1125.5	1025.0	994.6
67.5°	1088.1	1049.1	943.4	851.2	826.8
70°	963.4	926.8	826.2	741.5	717.1
72.5°	843.7	804.6	709.0	636.9	619.8
75°	661.0	624.4	548.7	492.4	483.3
77.5°	493.9	464.0	398.4	366.5	361.7
80°	386.6	359.2	308.7	286.8	286.8
82.5°	286.8	264.3	231.3	222.0	222.0
85°	149.7	137.5	130.9	130.9	130.9
87.5°	44.9	44.9	42.4	40.1	39.9
90°	0.0	0.0	0.0	0.7	0.0
92.5°	11.4	4.4	3.6	4.4	4.2
95°	42.1	7.6	9.8	10.5	10.5
97.5°	84.8	83.2	11.4	13.7	13.8
100°	117.3	121.0	12.0	14.3	15.0
102.5°	153.4	156.5	22.3	14.9	15.6
105°	211.3	214.2	217.3	15.8	16.5
107.5°	268.9	271.1	273.1	245.8	92.0
110°	306.8	309.0	309.8	317.3	318.8

TEST NUMBER: P1439160

CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	342.2	345.0	346.4	352.8	355.5
115°	396.2	399.2	400.0	406.0	408.2
117.5°	447.5	450.6	452.0	456.9	460.4
120°	481.2	484.9	485.7	491.8	494.7
122.5°	514.3	518.5	518.2	523.7	527.8
125°	563.1	566.8	565.4	571.5	575.2
127.5°	609.6	611.8	608.7	616.1	619.2
130°	639.1	641.3	637.6	644.4	648.1
132.5°	666.1	669.5	665.2	671.5	675.2
135°	707.5	711.2	705.2	710.6	715.0
137.5°	744.3	748.7	741.6	747.9	751.7
140°	768.4	772.8	763.9	770.7	775.1
142.5°	790.6	796.2	785.5	791.8	796.8
145°	823.3	828.4	818.0	823.4	827.8
147.5°	854.2	858.6	848.7	852.5	855.6
150°	872.9	877.3	866.1	870.0	873.6
152.5°	887.9	894.1	883.0	885.6	891.1
155°	912.0	919.3	906.7	909.1	915.0
157.5°	934.1	940.7	928.1	930.1	935.3
160°	947.3	953.9	941.3	942.2	947.3
162.5°	957.5	963.6	952.7	951.2	957.5
165°	972.1	977.3	966.9	964.0	970.6
167.5°	984.3	990.2	977.4	975.0	982.5
170°	990.9	996.8	983.4	979.8	987.9
172.5°	995.1	1000.4	987.6	982.8	989.1
175°	999.9	1005.1	991.7	986.5	989.4
177.5°	1001.3	1005.4	994.7	990.0	997.1
180°	997.7	997.7	997.7	997.7	997.7



TEST NUMBER: P1439160
 CATALOG NUMBER: CB3-030U-120D-940-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.59	21.76	21.27	22.45	23.26	19.52	20.68	20.19	21.37	22.18
	3H	22.28	23.33	22.97	24.03	24.87	20.95	22.00	21.64	22.70	23.54
	4H	22.93	23.92	23.64	24.63	25.48	21.48	22.47	22.19	23.18	24.03
	6H	23.33	24.24	24.05	24.96	25.83	21.82	22.73	22.54	23.45	24.31
	8H	23.47	24.34	24.21	25.08	25.95	21.95	22.82	22.68	23.56	24.43
	12H	23.55	24.38	24.29	25.11	26.01	22.03	22.86	22.77	23.60	24.49
4H	2H	21.04	22.03	21.75	22.74	23.59	20.18	21.17	20.89	21.88	22.73
	3H	22.96	23.78	23.68	24.53	25.40	21.83	22.65	22.55	23.40	24.27
	4H	23.72	24.46	24.46	25.21	26.11	22.45	23.19	23.18	23.94	24.84
	6H	24.24	24.88	24.99	25.66	26.56	22.87	23.52	23.63	24.30	25.20
	8H	24.43	25.04	25.20	25.81	26.73	23.05	23.66	23.81	24.43	25.35
	12H	24.55	25.09	25.33	25.88	26.81	23.17	23.71	23.95	24.51	25.43
8H	4H	23.87	24.47	24.63	25.24	26.16	22.73	23.34	23.49	24.11	25.02
	6H	24.50	25.00	25.29	25.81	26.74	23.27	23.77	24.06	24.59	25.51
	8H	24.78	25.22	25.58	26.04	26.97	23.53	23.97	24.33	24.78	25.72
	12H	24.96	25.35	25.76	26.15	27.15	23.72	24.11	24.52	24.91	25.91
12H	4H	23.86	24.40	24.64	25.19	26.12	22.75	23.29	23.53	24.08	25.01
	6H	24.52	24.97	25.32	25.78	26.72	23.33	23.78	24.13	24.59	25.53
	8H	24.83	25.23	25.64	26.03	27.02	23.63	24.02	24.43	24.82	25.82