

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439326

Luminaire Tested: CB3-125U-030D-940-1D-UNV-STD-W-8

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439326
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2506-466-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-125U-030D-940-1D-UNV-STD-W-8
Description: CORELITE BASIC SLOT LED LUMINAIRE, OPEN UPLIGHT
3-INCH APERTURE
DOWNLIGHT 300 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15410.3 lumens
Efficiency: N/A
Efficacy: 141.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 8' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 109.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

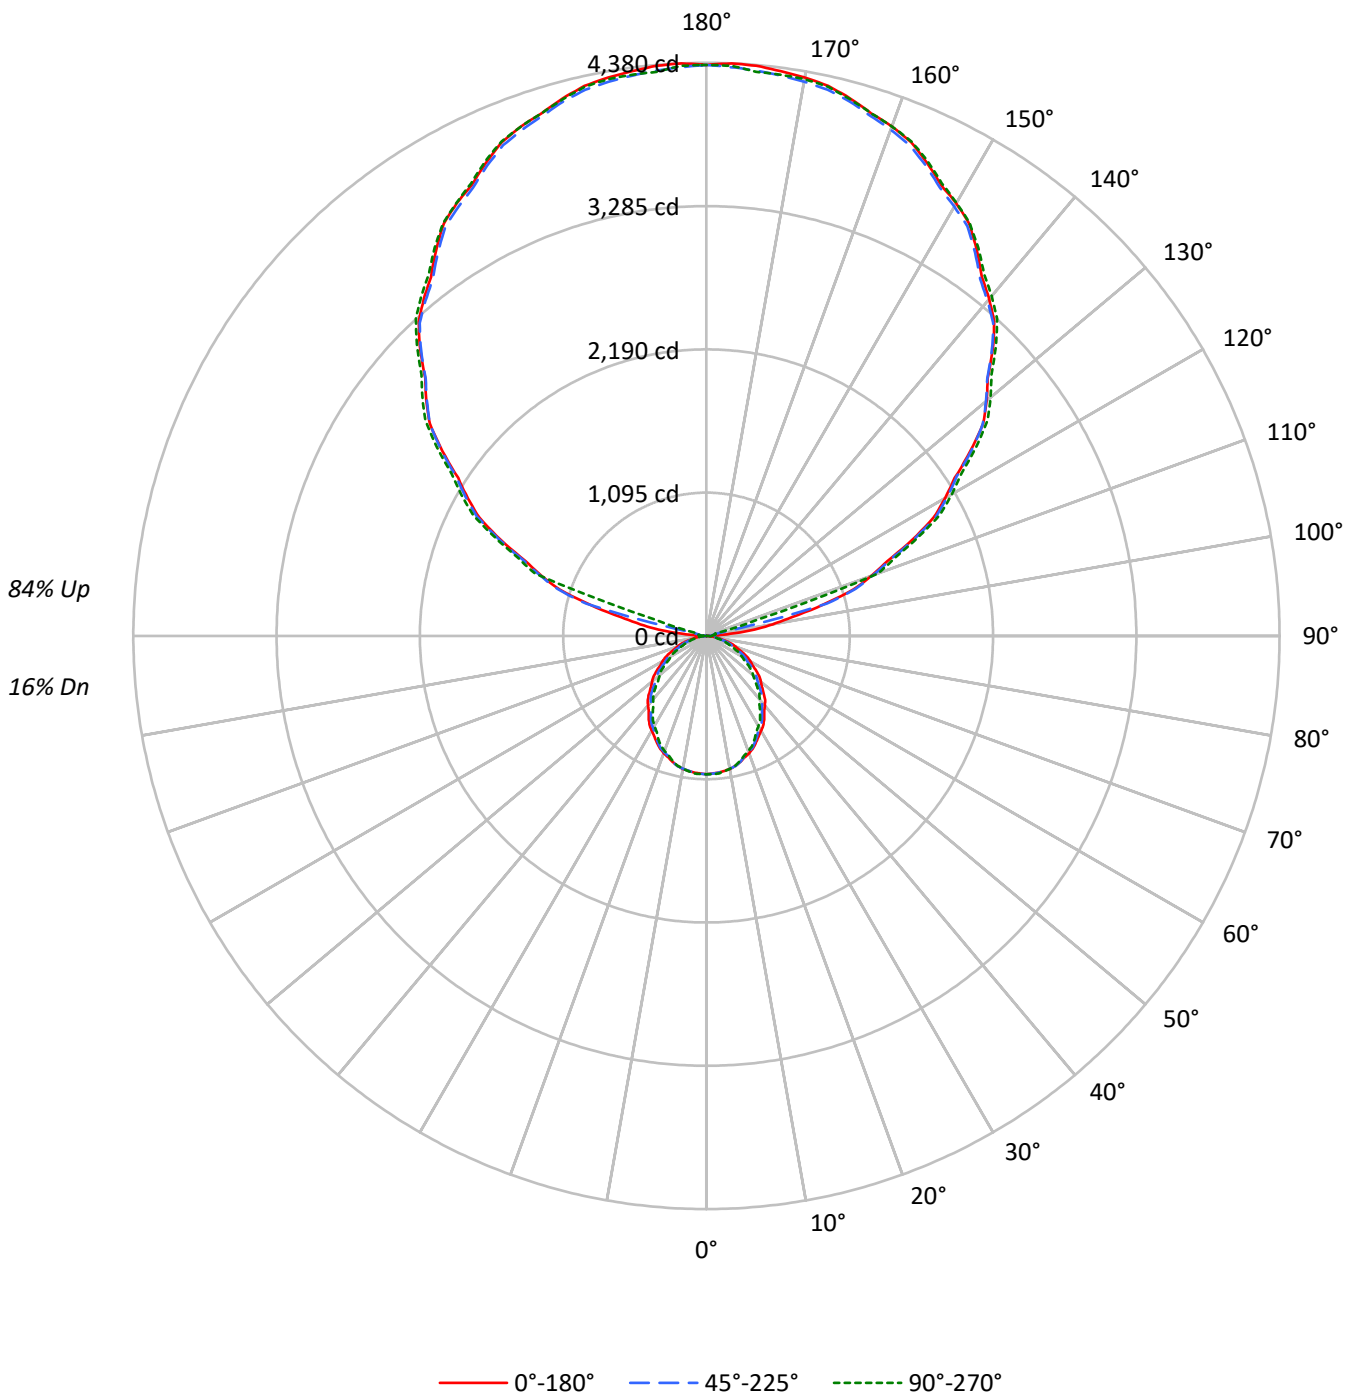



TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	99	99	99	99	87	87	87	87	65	65	65	44	44	44	25	25	25	16																				
1	90	86	83	79	79	76	73	70	57	55	53	39	38	37	22	22	21	14																				
2	82	75	70	65	72	66	62	58	50	46	44	34	32	31	20	19	18	12																				
3	75	66	59	54	66	58	53	48	44	40	37	30	28	26	18	16	15	10																				
4	68	58	51	45	60	52	45	41	39	35	31	27	24	22	16	14	13	9																				
5	63	52	44	39	55	46	39	35	34	30	27	24	21	19	14	13	12	8																				
6	58	46	39	33	50	41	35	30	31	26	23	22	19	17	13	11	10	7																				
7	53	42	34	29	47	37	30	26	28	23	20	19	17	15	12	10	9	6																				
8	49	38	30	25	43	33	27	23	25	21	18	18	15	13	11	9	8	5																				
9	46	34	27	22	40	30	24	20	23	19	16	16	13	11	10	8	7	5																				
10	42	31	24	20	37	28	22	18	21	17	14	15	12	10	9	8	7	4																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5983	5983	5983
5°	5954	5959	5993
10°	5928	5920	5920
15°	5838	5838	5802
20°	5743	5684	5634
25°	5598	5527	5429
30°	5461	5319	5191
35°	5317	5120	4938
40°	5125	4882	4670
45°	4952	4669	4380
50°	4773	4416	4099
55°	4578	4171	3830
60°	4369	3918	3527
65°	4122	3629	3207
70°	3839	3292	2857
75°	3480	2890	2544
80°	3033	2424	2251
85°	2343	2045	2045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4952 cd/sqm



TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	0.6
10°-20°	280.3	1.8
20°-30°	407.3	2.6
30°-40°	463.0	3.0
40°-50°	449.5	2.9
50°-60°	379.5	2.5
60°-70°	270.0	1.8
70°-80°	144.3	0.9
80°-90°	38.3	0.2
90°-100°	100.8	0.7
100°-110°	729.8	4.7
110°-120°	1735.1	11.3
120°-130°	2216.7	14.4
130°-140°	2391.0	15.5
140°-150°	2254.0	14.6
150°-160°	1838.8	11.9
160°-170°	1198.1	7.8
170°-180°	414.2	2.7
0°-30°	787.4	5.1
0°-40°	1250.4	8.1
0°-60°	2079.5	13.5
0°-90°	2532.0	16.4
90°-120°	2565.6	16.6
90°-150°	9427.3	61.2
90°-180°	12878.0	83.6
0°-180°	15410.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1058	1058	1058	1058	1058	
5°	1048	1062	1049	1048	1055	100
15°	997	1006	997	991	991	281
25°	897	900	886	873	870	413
35°	770	762	741	719	715	480
45°	619	609	584	556	548	477
55°	464	452	423	396	388	415
65°	308	297	271	247	240	305
75°	159	150	132	119	116	170
85°	36	33	32	32	32	43
90°	0	0	0	3	0	8
95°	184	33	43	46	46	227
105°	924	937	950	69	72	975
115°	1733	1746	1749	1776	1786	1710
125°	2463	2479	2473	2500	2516	2198
135°	3094	3110	3084	3108	3127	2383
145°	3601	3623	3578	3601	3620	2253
155°	3989	4021	3966	3976	4002	1840
165°	4252	4274	4229	4216	4245	1201
175°	4374	4396	4337	4315	4328	416
180°	4364	4364	4364	4364	4364	

TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1057.5	1057.5	1057.5	1057.5	1057.5
2.5°	1052.1	1062.7	1053.3	1054.6	1056.9
5°	1048.5	1061.7	1049.3	1047.9	1055.3
7.5°	1040.4	1052.4	1039.5	1036.5	1043.1
10°	1032.0	1045.2	1030.5	1026.8	1030.5
12.5°	1017.0	1030.8	1019.1	1013.0	1016.1
15°	996.7	1005.5	996.7	990.7	990.7
17.5°	971.9	981.2	964.5	960.3	958.7
20°	953.9	962.0	944.1	938.1	935.9
22.5°	929.8	937.3	922.5	912.2	909.4
25°	896.8	899.7	885.5	873.4	869.8
27.5°	863.6	864.3	844.8	830.1	825.3
30°	836.0	836.7	814.2	798.3	794.6
32.5°	808.3	806.1	784.7	765.9	763.4
35°	769.9	762.5	741.3	719.4	715.0
37.5°	723.4	719.0	694.0	672.1	665.5
40°	694.0	686.7	661.0	639.0	632.4
42.5°	664.6	656.0	629.7	605.4	598.2
45°	618.9	609.3	583.6	555.6	547.5
47.5°	572.9	562.5	534.2	507.1	498.1
50°	542.3	531.3	501.7	475.2	465.7
52.5°	511.0	499.4	469.9	442.8	435.0
55°	464.2	451.7	422.9	395.7	388.3
57.5°	417.3	405.0	376.3	350.6	341.7
60°	386.1	374.3	346.3	320.5	311.7
62.5°	354.2	343.0	315.6	290.5	282.3
65°	307.9	296.9	271.1	246.9	239.6
67.5°	262.1	252.7	227.3	205.1	199.2
70°	232.1	223.3	199.0	178.6	172.7
72.5°	203.2	193.8	170.8	153.4	149.3
75°	159.2	150.4	132.2	118.6	116.4
77.5°	119.0	111.8	96.0	88.3	87.1
80°	93.1	86.5	74.4	69.1	69.1
82.5°	69.1	63.7	55.7	53.5	53.5
85°	36.1	33.1	31.5	31.5	31.5
87.5°	10.8	10.8	10.2	10.3	9.6
90°	0.0	0.0	0.0	3.2	0.0
92.5°	50.0	19.1	15.8	19.1	18.4
95°	184.2	33.0	42.7	46.0	46.0
97.5°	370.9	363.9	50.0	59.9	60.5
100°	513.0	529.1	52.6	62.6	65.8
102.5°	670.8	684.3	97.3	65.2	68.4
105°	924.0	936.9	950.3	69.1	72.3
107.5°	1175.9	1185.6	1194.3	1075.1	402.5
110°	1341.7	1351.3	1354.8	1387.9	1394.3



TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1496.9	1509.1	1515.3	1543.2	1554.8
115°	1733.0	1745.8	1749.4	1776.0	1785.6
117.5°	1957.3	1970.8	1977.0	1998.4	2013.8
120°	2104.6	2120.7	2124.3	2150.9	2163.8
122.5°	2249.3	2267.9	2266.4	2290.5	2308.5
125°	2463.0	2479.1	2472.9	2499.5	2515.6
127.5°	2666.2	2675.9	2662.3	2694.8	2708.3
130°	2795.1	2804.8	2788.6	2818.5	2834.6
132.5°	2913.5	2928.3	2909.6	2936.9	2953.0
135°	3094.4	3110.5	3084.5	3108.0	3127.3
137.5°	3255.5	3274.8	3243.7	3271.0	3287.7
140°	3360.7	3380.0	3341.0	3371.0	3390.3
142.5°	3458.1	3482.5	3435.7	3463.2	3485.0
145°	3600.8	3623.3	3577.8	3601.2	3620.5
147.5°	3736.3	3755.6	3711.9	3728.7	3742.2
150°	3817.8	3837.1	3788.2	3805.0	3821.1
152.5°	3883.6	3910.6	3861.9	3873.6	3897.4
155°	3988.8	4021.0	3965.8	3976.3	4002.0
157.5°	4085.5	4114.4	4059.2	4068.3	4090.8
160°	4143.4	4172.3	4117.1	4120.9	4143.4
162.5°	4188.1	4214.5	4167.1	4160.5	4188.1
165°	4251.9	4274.4	4228.9	4216.4	4245.3
167.5°	4305.2	4330.9	4274.9	4264.5	4297.3
170°	4334.1	4359.8	4301.2	4285.6	4321.0
172.5°	4352.5	4375.7	4319.6	4298.6	4326.2
175°	4373.6	4396.1	4337.4	4314.7	4327.5
177.5°	4379.5	4397.5	4350.6	4330.2	4361.1
180°	4363.7	4363.7	4363.7	4363.7	4363.7

TEST NUMBER: P1439326

CATALOG NUMBER: CB3-125U-030D-940-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.78	9.40	9.99	10.58	12.27	7.71	8.33	8.91	9.50	11.19
	3H	10.43	10.99	11.64	12.17	13.87	9.10	9.66	10.31	10.84	12.54
	4H	11.05	11.58	12.27	12.76	14.46	9.61	10.13	10.82	11.32	13.02
	6H	11.42	11.91	12.65	13.10	14.81	9.91	10.40	11.13	11.58	13.29
	8H	11.55	12.02	12.78	13.22	14.92	10.03	10.49	11.25	11.69	13.39
	12H	11.61	12.05	12.84	13.25	14.97	10.09	10.53	11.32	11.73	13.45
4H	2H	9.16	9.69	10.39	10.88	12.57	8.30	8.83	9.53	10.02	11.72
	3H	11.03	11.47	12.26	12.68	14.39	9.90	10.34	11.13	11.55	13.26
	4H	11.77	12.17	12.99	13.37	15.10	10.50	10.90	11.72	12.10	13.83
	6H	12.26	12.60	13.49	13.82	15.54	10.89	11.24	12.12	12.46	14.18
	8H	12.44	12.77	13.67	13.98	15.71	11.06	11.38	12.29	12.59	14.33
	12H	12.53	12.82	13.77	14.04	15.78	11.15	11.45	12.40	12.67	14.41
8H	4H	11.88	12.20	13.10	13.41	15.15	10.74	11.06	11.97	12.27	14.01
	6H	12.49	12.75	13.73	14.01	15.74	11.26	11.52	12.50	12.78	14.51
	8H	12.76	12.99	14.01	14.22	15.97	11.51	11.74	12.76	12.97	14.72
	12H	12.91	13.12	14.17	14.34	16.12	11.67	11.88	12.93	13.10	14.88
12H	4H	11.84	12.13	13.08	13.35	15.09	10.73	11.02	11.97	12.24	13.98
	6H	12.50	12.73	13.75	13.96	15.71	11.31	11.54	12.56	12.77	14.52
	8H	12.79	12.99	14.04	14.22	16.00	11.58	11.79	12.84	13.01	14.79