

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1439479

Luminaire Tested: CB3-B-125U-055D-940-1D-UNV-STD-W-4

Issue Date: 3/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1439479
REPORT IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2405-119-2, G2-2312-242-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: CB3-B-125U-055D-940-1D-UNV-STD-W-4
Description: CORELITE BASIC SLOT LED LUMINAIRE, BATWING UPLIGHT
3-INCH APERTURE
DOWNLIGHT 550 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9395.3 lumens
Efficiency: N/A
Efficacy: 174.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.13 / 1.26
Luminous Opening: Rectangular (W 0.24' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

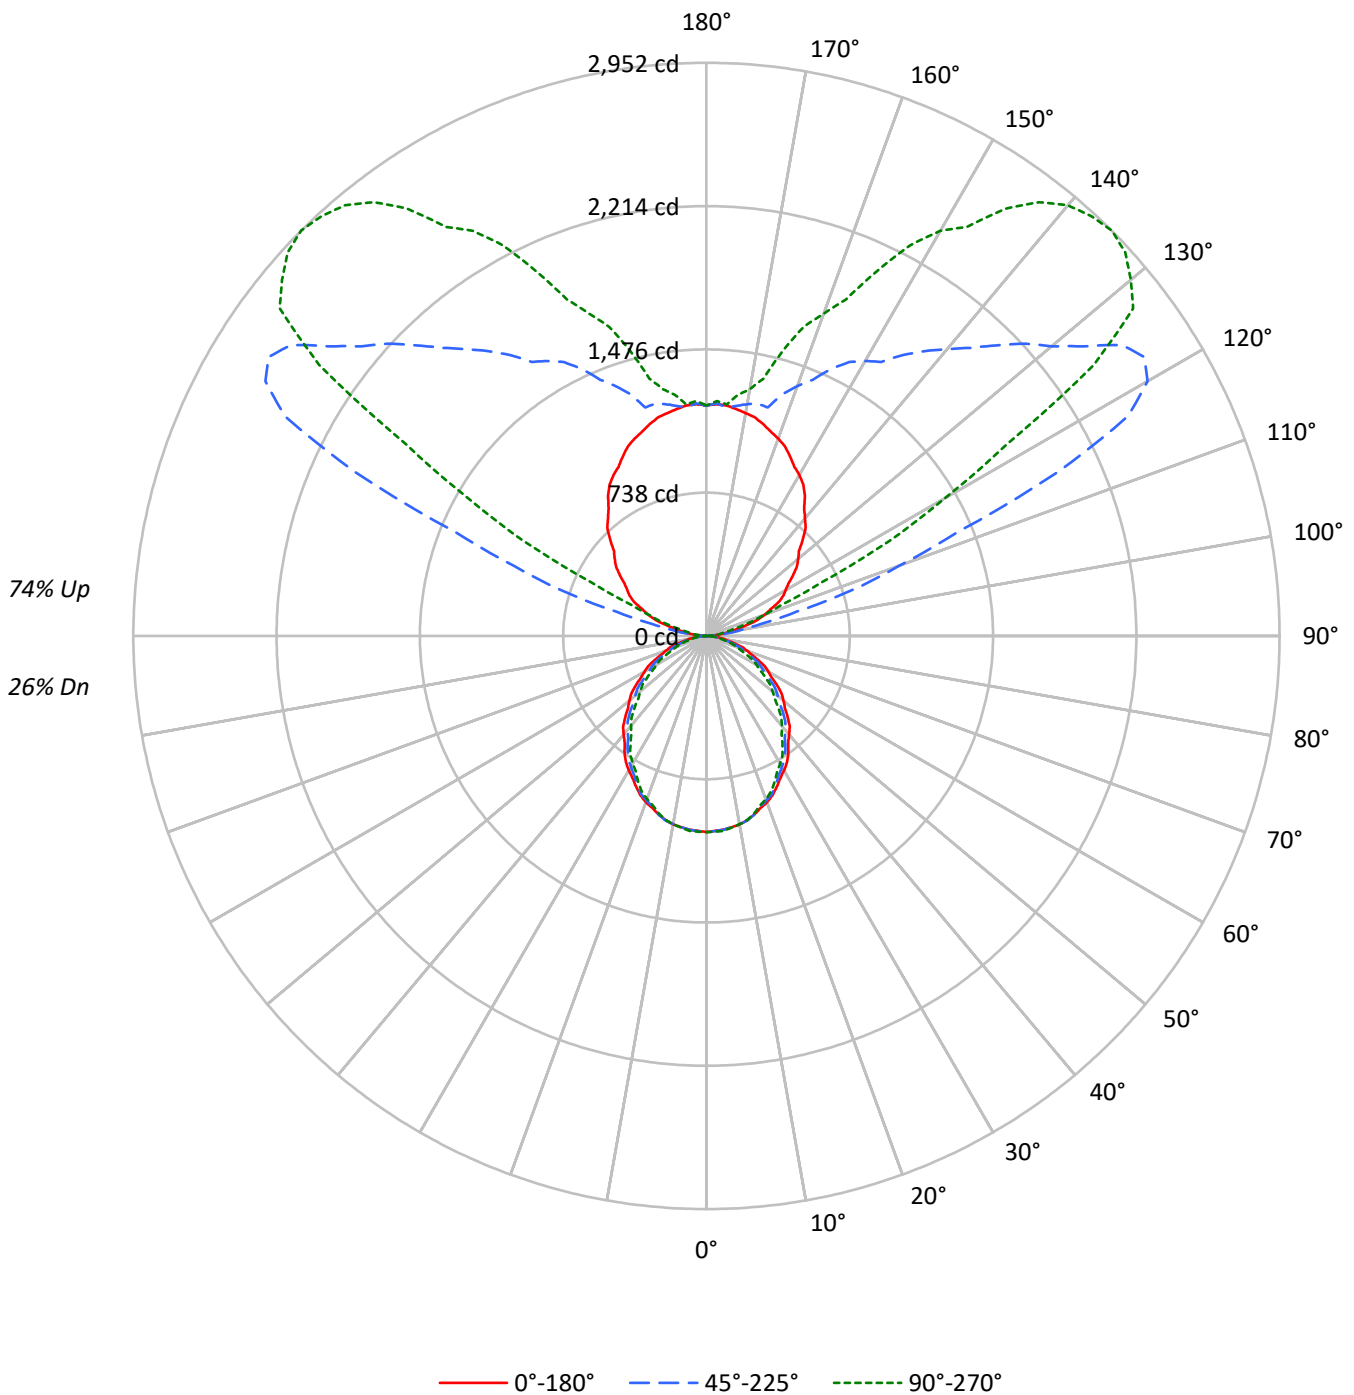



TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26								
1	92	88	85	81	82	79	76	73	61	59	57	45	44	43	30	29	29	22								
2	84	77	71	66	75	69	64	60	54	50	48	40	37	36	27	25	24	18								
3	77	68	61	55	68	61	55	50	47	43	40	35	32	30	24	22	21	16								
4	70	60	52	47	62	54	47	42	42	38	34	31	28	26	21	19	18	14								
5	64	53	46	40	57	48	41	36	38	33	29	28	25	22	19	17	16	12								
6	59	48	40	34	53	43	36	31	34	29	25	25	22	20	17	15	14	10								
7	55	43	35	30	49	39	32	27	30	26	22	23	20	17	16	14	12	9								
8	51	39	31	26	45	35	29	24	28	23	20	21	18	15	14	12	11	8								
9	47	35	28	23	42	32	26	21	25	21	17	19	16	14	13	11	10	8								
10	44	32	25	21	39	29	23	19	23	19	16	18	14	12	12	10	9	7								

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11429	11429	11429
5°	11375	11383	11449
10°	11325	11309	11309
15°	11151	11151	11085
20°	10970	10858	10763
25°	10694	10559	10372
30°	10432	10161	9916
35°	10158	9781	9434
40°	9791	9324	8923
45°	9460	8919	8369
50°	9118	8435	7830
55°	8747	7967	7317
60°	8346	7483	6737
65°	7874	6934	6128
70°	7334	6289	5458
75°	6649	5521	4861
80°	5799	4626	4300
85°	4466	3908	3908

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9460 cd/sqm



TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.3	1.0
10°-20°	267.8	2.8
20°-30°	389.0	4.1
30°-40°	442.3	4.7
40°-50°	429.4	4.6
50°-60°	362.5	3.9
60°-70°	257.9	2.7
70°-80°	137.8	1.5
80°-90°	36.4	0.4
90°-100°	80.2	0.9
100°-110°	420.4	4.5
110°-120°	1058.2	11.3
120°-130°	1632.4	17.4
130°-140°	1494.4	15.9
140°-150°	1102.9	11.7
150°-160°	703.1	7.5
160°-170°	370.1	3.9
170°-180°	115.2	1.2
0°-30°	752.1	8.0
0°-40°	1194.4	12.7
0°-60°	1986.2	21.1
0°-90°	2418.4	25.7
90°-120°	1558.7	16.6
90°-150°	5788.5	61.6
90°-180°	6977.0	74.3
0°-180°	9395.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1010	1010	1010	1010	1010	
5°	1002	1014	1002	1001	1008	95
15°	952	960	952	946	946	268
25°	857	859	846	834	831	395
35°	735	728	708	687	683	458
45°	591	582	557	531	523	456
55°	443	431	404	378	371	396
65°	294	284	259	236	229	291
75°	152	144	126	113	111	162
85°	34	32	30	30	30	41
90°	0	0	0	0	0	3
95°	42	118	47	26	26	53
105°	214	664	481	198	162	229
115°	408	832	1996	868	658	397
125°	544	840	2613	2634	2435	486
135°	700	935	2116	2886	2952	541
145°	883	1021	1766	2456	2686	549
155°	1019	1096	1515	1875	2069	470
165°	1129	1159	1218	1424	1521	318
175°	1191	1217	1181	1186	1197	113
180°	1186	1186	1186	1186	1186	



TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.1	1010.1	1010.1	1010.1	1010.1
2.5°	1005.0	1015.1	1006.1	1007.3	1009.6
5°	1001.5	1014.2	1002.2	1001.0	1008.0
7.5°	993.8	1005.3	992.9	990.0	996.4
10°	985.7	998.4	984.3	980.8	984.3
12.5°	971.4	984.6	973.4	967.6	970.5
15°	952.0	960.4	952.0	946.3	946.3
17.5°	928.3	937.2	921.3	917.3	915.7
20°	911.1	918.8	901.8	896.0	893.9
22.5°	888.2	895.3	881.1	871.3	868.7
25°	856.6	859.4	845.8	834.3	830.8
27.5°	824.9	825.6	807.0	792.9	788.3
30°	798.5	799.2	777.7	762.5	759.0
32.5°	772.1	770.0	749.6	731.6	729.2
35°	735.4	728.3	708.1	687.2	683.0
37.5°	691.0	686.8	662.9	642.0	635.6
40°	662.9	655.9	631.3	610.4	604.1
42.5°	634.8	626.6	601.5	578.2	571.4
45°	591.2	582.0	557.4	530.7	523.0
47.5°	547.3	537.3	510.2	484.4	475.8
50°	518.0	507.5	479.2	453.9	444.8
52.5°	488.1	477.1	448.8	423.0	415.5
55°	443.4	431.4	403.9	377.9	370.9
57.5°	398.6	386.8	359.4	334.8	326.4
60°	368.8	357.5	330.7	306.1	297.7
62.5°	338.3	327.7	301.5	277.5	269.6
65°	294.1	283.6	259.0	235.9	228.9
67.5°	250.4	241.4	217.1	195.9	190.3
70°	221.7	213.3	190.1	170.6	165.0
72.5°	194.1	185.2	163.1	146.6	142.6
75°	152.1	143.7	126.3	113.3	111.2
77.5°	113.6	106.8	91.7	84.3	83.2
80°	89.0	82.6	71.0	66.0	66.0
82.5°	66.0	60.8	53.2	51.1	51.1
85°	34.4	31.6	30.1	30.1	30.1
87.5°	10.3	10.3	9.8	9.2	9.2
90°	0.0	0.0	0.0	0.0	0.0
92.5°	12.5	28.9	8.4	4.3	8.4
95°	41.8	118.4	47.0	26.1	26.1
97.5°	86.7	264.6	121.2	64.7	58.5
100°	120.2	375.7	188.1	93.8	83.6
102.5°	157.8	486.9	284.3	127.1	108.7
105°	214.2	663.9	480.7	197.8	162.0
107.5°	277.0	784.8	792.2	304.9	245.6
110°	318.8	834.8	1055.6	400.3	308.3



TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	356.4	847.9	1406.7	545.8	421.2
115°	407.6	831.7	1996.2	867.9	658.4
117.5°	445.2	791.6	2443.5	1380.7	1065.0
120°	470.3	792.2	2623.2	1768.7	1416.1
122.5°	499.6	796.9	2673.4	2153.9	1830.0
125°	543.5	839.8	2612.8	2634.4	2435.1
127.5°	587.3	871.4	2449.7	2831.9	2769.5
130°	616.6	892.5	2320.1	2899.1	2853.1
132.5°	645.9	913.6	2228.2	2900.7	2924.2
135°	700.2	935.3	2116.3	2886.0	2952.4
137.5°	755.6	962.0	2011.8	2794.6	2932.6
140°	789.1	983.2	1928.2	2695.7	2894.9
142.5°	826.7	1000.4	1848.8	2604.0	2815.5
145°	883.1	1021.1	1766.2	2456.0	2685.9
147.5°	927.0	1032.3	1673.2	2306.7	2496.8
150°	956.3	1032.9	1635.6	2173.9	2409.0
152.5°	981.4	1053.9	1589.6	2052.2	2266.8
155°	1019.0	1095.6	1515.4	1875.2	2069.3
157.5°	1056.6	1130.2	1427.6	1743.1	1874.9
160°	1081.7	1143.0	1369.1	1679.4	1766.2
162.5°	1102.6	1155.7	1306.4	1571.0	1670.1
165°	1128.7	1159.4	1217.5	1423.6	1520.6
167.5°	1152.8	1168.1	1224.9	1278.9	1357.6
170°	1165.3	1180.6	1212.3	1265.2	1290.7
172.5°	1177.8	1201.3	1195.6	1231.6	1253.1
175°	1191.4	1217.0	1181.0	1186.4	1196.6
177.5°	1194.6	1206.8	1198.7	1199.0	1211.3
180°	1186.2	1186.2	1186.2	1186.2	1186.2



TEST NUMBER: P1439479

CATALOG NUMBER: CB3-B-125U-055D-940-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.78	13.45	13.92	14.58	16.16	11.70	12.37	12.84	13.50	15.08
	3H	14.43	15.03	15.58	16.17	17.77	13.10	13.70	14.25	14.84	16.44
	4H	15.05	15.62	16.21	16.76	18.36	13.61	14.18	14.76	15.32	16.92
	6H	15.43	15.95	16.59	17.09	18.71	13.91	14.44	15.08	15.58	17.19
	8H	15.56	16.06	16.73	17.22	18.82	14.03	14.53	15.20	15.69	17.29
	12H	15.62	16.09	16.79	17.24	18.87	14.10	14.58	15.27	15.73	17.35
4H	2H	13.16	13.73	14.33	14.87	16.47	12.30	12.87	13.47	14.01	15.62
	3H	15.03	15.51	16.21	16.68	18.29	13.90	14.38	15.08	15.55	17.16
	4H	15.78	16.21	16.95	17.37	19.00	14.50	14.94	15.68	16.10	17.73
	6H	16.27	16.64	17.44	17.82	19.44	14.90	15.28	16.08	16.46	18.08
	8H	16.45	16.80	17.63	17.97	19.61	15.07	15.42	16.25	16.59	18.23
	12H	16.54	16.86	17.74	18.04	19.68	15.17	15.48	16.36	16.66	18.31
8H	4H	15.89	16.24	17.07	17.41	19.05	14.75	15.10	15.93	16.27	17.91
	6H	16.50	16.79	17.70	18.00	19.63	15.27	15.56	16.47	16.77	18.40
	8H	16.77	17.03	17.98	18.21	19.87	15.52	15.77	16.72	16.96	18.62
	12H	16.93	17.15	18.14	18.34	20.02	15.69	15.91	16.89	17.09	18.78
12H	4H	15.85	16.17	17.05	17.35	18.99	14.74	15.06	15.94	16.24	17.88
	6H	16.52	16.77	17.72	17.95	19.61	15.33	15.58	16.53	16.77	18.42
	8H	16.81	17.03	18.01	18.21	19.90	15.60	15.82	16.81	17.01	18.69