

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1191371

Luminaire Tested: SQ2-FA-150U-050D-L830-UNV-STD-W-4

Issue Date: 9/23/2025

Test Information

Test Method: LM-79-2019
Report Number: P1191371
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 9/23/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FA-150U-050D-L830-UNV-STD-W-4
Description: CORELITE SQ2 LED LUMINAIRE
FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8976.6 lumens
Efficiency: N/A
Efficacy: 120.7 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 74.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

Luminous Intensity Polar Plot

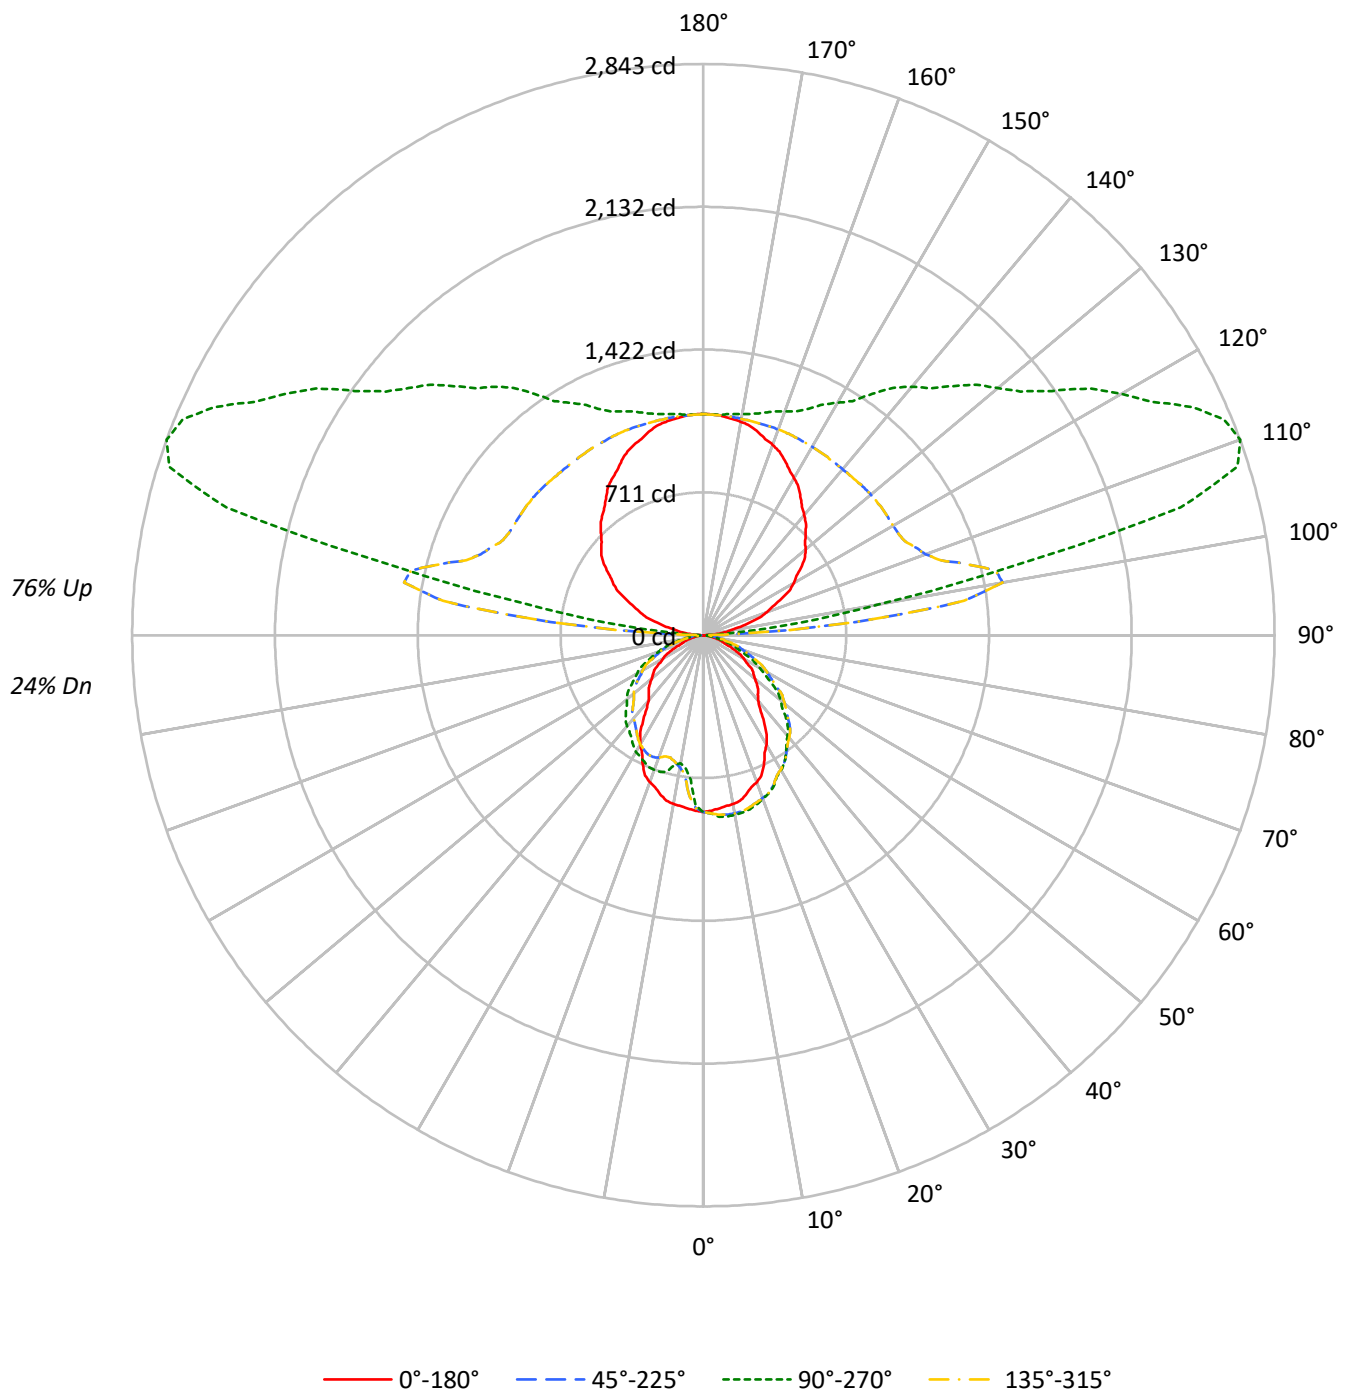

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28
2	84	77	71	66	74	69	64	59	53	50	47	39	37	35	25	24	23
3	76	67	60	55	68	60	54	50	47	43	39	34	32	29	22	21	20
4	70	60	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13
7	54	42	35	30	48	38	32	27	30	25	22	22	19	17	15	13	11
8	50	38	31	26	44	34	28	24	27	22	19	20	17	15	14	12	10
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	13	11	9
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14210	14210	14210	14210
5°	14044	14707	14044	11721
10°	13982	14877	13982	10626
15°	13742	14997	13742	11746
20°	13364	14888	13364	12251
25°	12702	14767	12702	12397
30°	11703	14438	11703	12529
35°	10354	14121	10354	12305
40°	8916	13734	8916	12440
45°	8802	13241	8802	12463
50°	8397	12597	8397	12509
55°	8355	11620	8355	12389
60°	7492	10356	7492	12339
65°	6388	9123	6388	11989
70°	5155	7728	5155	11113
75°	4467	6382	4467	10212
80°	3803	4761	3803	8247
85°	2519	2519	2519	5057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 13709 cd/sqm

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.2	0.9
10°-20°	221.3	2.5
20°-30°	336.1	3.7
30°-40°	394.5	4.4
40°-50°	400.3	4.5
50°-60°	350.7	3.9
60°-70°	248.8	2.8
70°-80°	128.1	1.4
80°-90°	28.1	0.3
90°-100°	419.1	4.7
100°-110°	1372.5	15.3
110°-120°	1356.9	15.1
120°-130°	1109.2	12.4
130°-140°	905.1	10.1
140°-150°	704.4	7.8
150°-160°	507.2	5.7
160°-170°	310.3	3.5
170°-180°	104.8	1.2
0°-30°	636.5	7.1
0°-40°	1031.0	11.5
0°-60°	1782.0	19.9
0°-90°	2187.0	24.4
90°-120°	3148.5	35.1
90°-150°	5867.2	65.4
90°-180°	6790.0	75.6
0°-180°	8976.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	880	880	880	880	880	
5°	866	907	866	723	866	82
15°	822	897	822	703	822	231
25°	713	829	713	696	713	325
35°	525	716	525	624	525	327
45°	386	580	386	546	386	295
55°	297	413	297	440	297	257
65°	167	239	167	314	167	167
75°	72	102	72	164	72	77
85°	14	14	14	27	14	17
90°	1	9	1	9	1	3
95°	59	176	59	176	59	67
105°	238	2459	238	2459	238	251
115°	430	2685	430	2685	430	424
125°	598	2119	598	2119	598	532
135°	720	1754	720	1754	720	557
145°	842	1466	842	1466	842	528
155°	960	1244	960	1244	960	442
165°	1048	1145	1048	1145	1048	295
175°	1096	1102	1096	1102	1096	104
180°	1100	1100	1100	1100	1100	

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1
2.5°	874.7	888.0	888.3	888.3	888.3	888.3	888.3	888.0	874.7	874.7	861.0
5°	866.5	889.8	897.2	900.7	907.4	900.7	897.2	889.8	866.5	856.5	801.7
7.5°	858.3	889.6	900.6	906.8	910.1	906.8	900.6	889.6	858.3	813.6	698.6
10°	852.8	889.5	900.6	904.1	907.4	904.1	900.6	889.5	852.8	762.8	668.6
12.5°	844.6	884.0	897.9	901.3	904.7	901.3	897.9	884.0	844.6	717.2	646.8
15°	822.1	875.5	886.9	893.8	897.2	893.8	886.9	875.5	822.1	678.7	631.1
17.5°	794.1	858.9	874.0	880.2	882.8	880.2	874.0	858.9	794.1	644.1	631.8
20°	777.8	847.8	863.1	866.5	866.5	866.5	863.1	847.8	777.8	627.7	648.1
22.5°	755.9	834.0	849.4	850.2	852.8	850.2	849.4	834.0	755.9	608.5	656.3
25°	713.0	803.0	825.5	822.3	828.9	822.3	825.5	803.0	713.0	582.9	655.0
27.5°	660.4	773.8	790.1	793.5	793.5	793.5	790.1	773.8	660.4	557.7	641.3
30°	627.7	754.4	771.0	774.4	774.4	774.4	771.0	754.4	627.7	541.0	627.7
32.5°	586.7	737.5	751.8	752.5	752.5	752.5	751.8	737.5	586.7	524.0	605.8
35°	525.3	708.8	719.8	719.7	716.4	719.7	719.8	708.8	525.3	498.7	579.9
37.5°	463.9	672.1	687.0	682.2	678.8	682.2	687.0	672.1	463.9	472.6	558.1
40°	423.0	649.8	665.2	654.9	651.6	654.9	665.2	649.8	423.0	453.0	539.0
42.5°	401.2	625.3	640.6	627.6	624.3	627.6	640.6	625.3	401.2	433.9	522.6
45°	385.5	585.6	600.4	586.6	579.9	586.6	600.4	585.6	385.5	405.5	494.6
47.5°	361.6	537.7	558.8	538.1	531.5	538.1	558.8	537.7	361.6	376.3	469.4
50°	334.3	507.8	528.7	508.1	501.5	508.1	528.7	507.8	334.3	354.3	450.3
52.5°	315.2	478.0	496.0	472.7	466.0	472.7	496.0	478.0	315.2	327.2	433.9
55°	296.8	433.5	446.9	422.8	412.8	422.8	446.9	433.5	296.8	286.8	402.5
57.5°	253.8	383.9	397.8	370.2	358.9	370.2	397.8	383.9	253.8	245.1	369.8
60°	232.0	348.7	365.0	337.3	320.7	337.3	365.0	348.7	232.0	215.3	348.0
62.5°	207.4	310.8	332.3	304.6	287.9	304.6	332.3	310.8	207.4	196.1	323.4
65°	167.2	257.2	283.1	255.5	238.8	255.5	283.1	257.2	167.2	173.8	283.1
67.5°	131.0	208.4	237.4	207.1	193.8	207.1	237.4	208.4	131.0	153.0	246.3
70°	109.2	175.9	204.7	177.1	163.7	177.1	204.7	175.9	109.2	139.2	221.7
72.5°	95.5	146.2	177.4	147.1	136.5	147.1	177.4	146.2	95.5	125.5	191.7
75°	71.6	101.7	136.5	109.0	102.3	109.0	136.5	101.7	71.6	101.7	150.1
77.5°	51.9	65.9	96.2	72.9	70.3	72.9	96.2	65.9	51.9	76.5	109.2
80°	40.9	44.3	71.6	51.2	51.2	51.2	71.6	44.3	40.9	57.6	81.9
82.5°	27.3	30.6	49.8	34.7	32.1	34.7	49.8	30.6	27.3	41.3	57.3
85°	13.6	13.6	20.5	13.6	13.6	13.6	20.5	13.6	13.6	20.3	27.3
87.5°	3.0	3.4	7.3	4.3	4.5	4.3	7.3	3.4	3.0	6.1	7.3
90°	1.1	3.3	9.0	7.9	9.0	7.9	9.0	3.3	1.1	3.3	9.0
92.5°	19.2	70.1	215.3	70.0	56.1	70.0	215.3	70.1	19.2	70.1	215.3
95°	58.8	170.4	762.0	271.4	176.4	271.4	762.0	170.4	58.8	170.4	762.0
97.5°	106.7	224.8	1307.4	790.9	490.2	790.9	1307.4	224.8	106.7	224.8	1307.4
100°	140.2	252.9	1512.7	1350.8	895.4	1350.8	1512.7	252.9	140.2	252.9	1512.7
102.5°	178.2	288.3	1490.1	1990.5	1543.0	1990.5	1490.1	288.3	178.2	288.3	1490.1
105°	238.5	340.2	1362.3	2588.3	2459.0	2588.3	1362.3	340.2	238.5	340.2	1362.3
107.5°	298.0	391.3	1237.7	2644.2	2786.4	2644.2	1237.7	391.3	298.0	391.3	1237.7
110°	336.9	427.6	1178.0	2579.2	2843.4	2579.2	1178.0	427.6	336.9	427.6	1178.0

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	374.0	462.0	1141.9	2466.0	2804.5	2466.0	1141.9	462.0	374.0	462.0	1141.9
115°	429.6	513.6	1106.8	2287.1	2685.1	2287.1	1106.8	513.6	429.6	513.6	1106.8
117.5°	483.7	562.1	1093.5	2111.3	2515.5	2111.3	1093.5	562.1	483.7	562.1	1093.5
120°	518.9	593.0	1089.9	2008.9	2402.4	2008.9	1089.9	593.0	518.9	593.0	1089.9
122.5°	550.6	622.9	1089.9	1920.5	2285.8	1920.5	1089.9	622.9	550.6	622.9	1089.9
125°	598.1	666.6	1091.0	1803.6	2118.7	1803.6	1091.0	666.6	598.1	666.6	1091.0
127.5°	638.3	708.2	1089.6	1717.4	1991.6	1717.4	1089.6	708.2	638.3	708.2	1089.6
130°	663.6	734.4	1088.7	1665.3	1912.9	1665.3	1088.7	734.4	663.6	734.4	1088.7
132.5°	686.3	758.8	1086.0	1620.5	1845.1	1620.5	1086.0	758.8	686.3	758.8	1086.0
135°	720.2	796.4	1081.9	1555.6	1753.5	1555.6	1081.9	796.4	720.2	796.4	1081.9
137.5°	755.9	831.5	1079.5	1488.0	1666.9	1488.0	1079.5	831.5	755.9	831.5	1079.5
140°	781.2	854.2	1078.6	1445.3	1614.4	1445.3	1078.6	854.2	781.2	854.2	1078.6
142.5°	806.5	875.1	1078.6	1399.7	1552.9	1399.7	1078.6	875.1	806.5	875.1	1078.6
145°	842.3	904.2	1079.7	1338.1	1466.3	1338.1	1079.7	904.2	842.3	904.2	1079.7
147.5°	879.8	931.3	1081.3	1284.5	1381.3	1284.5	1081.3	931.3	879.8	931.3	1081.3
150°	903.3	948.6	1083.1	1253.4	1335.2	1253.4	1083.1	948.6	903.3	948.6	1083.1
152.5°	926.8	966.9	1084.0	1227.7	1295.4	1227.7	1084.0	966.9	926.8	966.9	1084.0
155°	959.8	991.9	1086.5	1197.2	1243.6	1197.2	1086.5	991.9	959.8	991.9	1086.5
157.5°	989.5	1012.7	1089.0	1173.2	1206.8	1173.2	1089.0	1012.7	989.5	1012.7	1089.0
160°	1008.5	1027.3	1089.9	1159.4	1186.0	1159.4	1089.9	1027.3	1008.5	1027.3	1089.9
162.5°	1024.7	1040.0	1089.9	1148.4	1167.9	1148.4	1089.9	1040.0	1024.7	1040.0	1089.9
165°	1048.0	1058.0	1091.0	1133.1	1145.3	1133.1	1091.0	1058.0	1048.0	1058.0	1091.0
167.5°	1067.7	1072.6	1092.3	1121.2	1127.8	1121.2	1092.3	1072.6	1067.7	1072.6	1092.3
170°	1078.6	1080.8	1093.3	1114.8	1117.0	1114.8	1093.3	1080.8	1078.6	1080.8	1093.3
172.5°	1086.7	1088.0	1096.0	1110.2	1110.7	1110.2	1096.0	1088.0	1086.7	1088.0	1096.0
175°	1095.5	1095.5	1096.6	1104.5	1102.3	1104.5	1096.6	1095.5	1095.5	1095.5	1096.6
177.5°	1100.0	1099.2	1098.2	1103.6	1100.0	1103.6	1098.2	1099.2	1100.0	1099.2	1098.2
180°	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	880.1	880.1	880.1	880.1	880.1	880.1
2.5°	852.8	850.1	852.8	861.0	874.7	874.7
5°	739.9	723.2	739.9	801.7	856.5	866.5
7.5°	672.6	667.2	672.6	698.6	813.6	858.3
10°	648.1	648.1	648.1	668.6	762.8	852.8
12.5°	645.7	659.1	645.7	646.8	717.2	844.6
15°	686.0	702.7	686.0	631.1	678.7	822.1
17.5°	699.6	713.0	699.6	631.8	644.1	794.1
20°	699.6	713.0	699.6	648.1	627.7	777.8
22.5°	696.9	710.2	696.9	656.3	608.5	755.9
25°	689.2	695.9	689.2	655.0	582.9	713.0
27.5°	675.5	680.2	675.5	641.3	557.7	660.4
30°	662.0	672.0	662.0	627.7	541.0	627.7
32.5°	648.2	650.2	648.2	605.8	524.0	586.7
35°	627.6	624.3	627.6	579.9	498.7	525.3
37.5°	599.8	603.8	599.8	558.1	472.6	463.9
40°	583.5	590.2	583.5	539.0	453.0	423.0
42.5°	567.1	573.8	567.1	522.6	433.9	401.2
45°	542.5	545.8	542.5	494.6	405.5	385.5
47.5°	513.8	517.2	513.8	469.4	376.3	361.6
50°	494.7	498.0	494.7	450.3	354.3	334.3
52.5°	472.9	476.2	472.9	433.9	327.2	315.2
55°	440.1	440.1	440.1	402.5	286.8	296.8
57.5°	402.6	406.6	402.6	369.8	245.1	253.8
60°	375.4	382.1	375.4	348.0	215.3	232.0
62.5°	350.8	354.8	350.8	323.4	196.1	207.4
65°	310.5	313.8	310.5	283.1	173.8	167.2
67.5°	265.5	268.1	265.5	246.3	153.0	131.0
70°	235.4	235.4	235.4	221.7	139.2	109.2
72.5°	205.4	208.1	205.4	191.7	125.5	95.5
75°	160.4	163.7	160.4	150.1	101.7	71.6
77.5°	115.4	118.7	115.4	109.2	76.5	51.9
80°	85.4	88.7	85.4	81.9	57.6	40.9
82.5°	60.7	61.4	60.7	57.3	41.3	27.3
85°	27.3	27.3	27.3	27.3	20.3	13.6
87.5°	7.0	7.3	7.0	7.3	6.1	3.0
90°	7.9	9.0	7.9	9.0	3.3	1.1
92.5°	70.0	56.1	70.0	215.3	70.1	19.2
95°	271.4	176.4	271.4	762.0	170.4	58.8
97.5°	790.9	490.2	790.9	1307.4	224.8	106.7
100°	1350.8	895.4	1350.8	1512.7	252.9	140.2
102.5°	1990.5	1543.0	1990.5	1490.1	288.3	178.2
105°	2588.3	2459.0	2588.3	1362.3	340.2	238.5
107.5°	2644.2	2786.4	2644.2	1237.7	391.3	298.0
110°	2579.2	2843.4	2579.2	1178.0	427.6	336.9

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	2466.0	2804.5	2466.0	1141.9	462.0	374.0
115°	2287.1	2685.1	2287.1	1106.8	513.6	429.6
117.5°	2111.3	2515.5	2111.3	1093.5	562.1	483.7
120°	2008.9	2402.4	2008.9	1089.9	593.0	518.9
122.5°	1920.5	2285.8	1920.5	1089.9	622.9	550.6
125°	1803.6	2118.7	1803.6	1091.0	666.6	598.1
127.5°	1717.4	1991.6	1717.4	1089.6	708.2	638.3
130°	1665.3	1912.9	1665.3	1088.7	734.4	663.6
132.5°	1620.5	1845.1	1620.5	1086.0	758.8	686.3
135°	1555.6	1753.5	1555.6	1081.9	796.4	720.2
137.5°	1488.0	1666.9	1488.0	1079.5	831.5	755.9
140°	1445.3	1614.4	1445.3	1078.6	854.2	781.2
142.5°	1399.7	1552.9	1399.7	1078.6	875.1	806.5
145°	1338.1	1466.3	1338.1	1079.7	904.2	842.3
147.5°	1284.5	1381.3	1284.5	1081.3	931.3	879.8
150°	1253.4	1335.2	1253.4	1083.1	948.6	903.3
152.5°	1227.7	1295.4	1227.7	1084.0	966.9	926.8
155°	1197.2	1243.6	1197.2	1086.5	991.9	959.8
157.5°	1173.2	1206.8	1173.2	1089.0	1012.7	989.5
160°	1159.4	1186.0	1159.4	1089.9	1027.3	1008.5
162.5°	1148.4	1167.9	1148.4	1089.9	1040.0	1024.7
165°	1133.1	1145.3	1133.1	1091.0	1058.0	1048.0
167.5°	1121.2	1127.8	1121.2	1092.3	1072.6	1067.7
170°	1114.8	1117.0	1114.8	1093.3	1080.8	1078.6
172.5°	1110.2	1110.7	1110.2	1096.0	1088.0	1086.7
175°	1104.5	1102.3	1104.5	1096.6	1095.5	1095.5
177.5°	1103.6	1100.0	1103.6	1098.2	1099.2	1100.0
180°	1100.0	1100.0	1100.0	1100.0	1100.0	1100.0

TEST NUMBER: P1191371

CATALOG NUMBER: SQ2-FA-150U-050D-L830-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.52	13.19	13.67	14.33	15.93	13.75	14.42	14.90	15.55	17.15
	3H	13.60	14.20	14.75	15.34	16.95	14.98	15.57	16.13	16.72	18.33
	4H	13.94	14.51	15.11	15.66	17.27	15.36	15.92	16.52	17.07	18.69
	6H	14.09	14.62	15.27	15.76	17.39	15.51	16.03	16.68	17.18	18.80
	8H	14.12	14.62	15.30	15.78	17.40	15.53	16.02	16.70	17.19	18.81
	12H	14.11	14.58	15.29	15.74	17.38	15.50	15.98	16.68	17.13	18.77
4H	2H	13.43	14.00	14.60	15.14	16.76	14.34	14.91	15.51	16.05	17.67
	3H	14.78	15.25	15.95	16.42	18.05	15.77	16.24	16.95	17.42	19.04
	4H	15.21	15.65	16.39	16.81	18.46	16.23	16.67	17.41	17.83	19.47
	6H	15.43	15.80	16.61	16.99	18.62	16.44	16.81	17.63	18.00	19.63
	8H	15.48	15.83	16.67	17.00	18.66	16.48	16.83	17.67	18.00	19.66
	12H	15.47	15.79	16.67	16.97	18.63	16.46	16.78	17.66	17.96	19.62
8H	4H	15.60	15.94	16.78	17.12	18.77	16.42	16.77	17.61	17.95	19.60
	6H	15.93	16.22	17.14	17.44	19.09	16.72	17.01	17.93	18.23	19.88
	8H	16.05	16.30	17.26	17.49	19.16	16.82	17.07	18.03	18.26	19.93
	12H	16.07	16.29	17.29	17.48	19.19	16.82	17.04	18.03	18.23	19.93
12H	4H	15.59	15.91	16.79	17.09	18.75	16.38	16.70	17.58	17.88	19.54
	6H	16.00	16.25	17.21	17.45	19.12	16.74	16.99	17.95	18.19	19.86
	8H	16.14	16.36	17.35	17.55	19.25	16.85	17.07	18.06	18.26	19.96