

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1191354

Luminaire Tested: SQ2-FA-125U-075D-L835-UNV-STD-W-4

Issue Date: 9/23/2025

Test Information

Test Method: LM-79-2019
Report Number: P1191354
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2104-222-9, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 9/23/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2-FA-125U-075D-L835-UNV-STD-W-4
Description: CORELITE SQ2 LED LUMINAIRE
FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8832.9 lumens
Efficiency: N/A
Efficacy: 125.1 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 70.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

Luminous Intensity Polar Plot

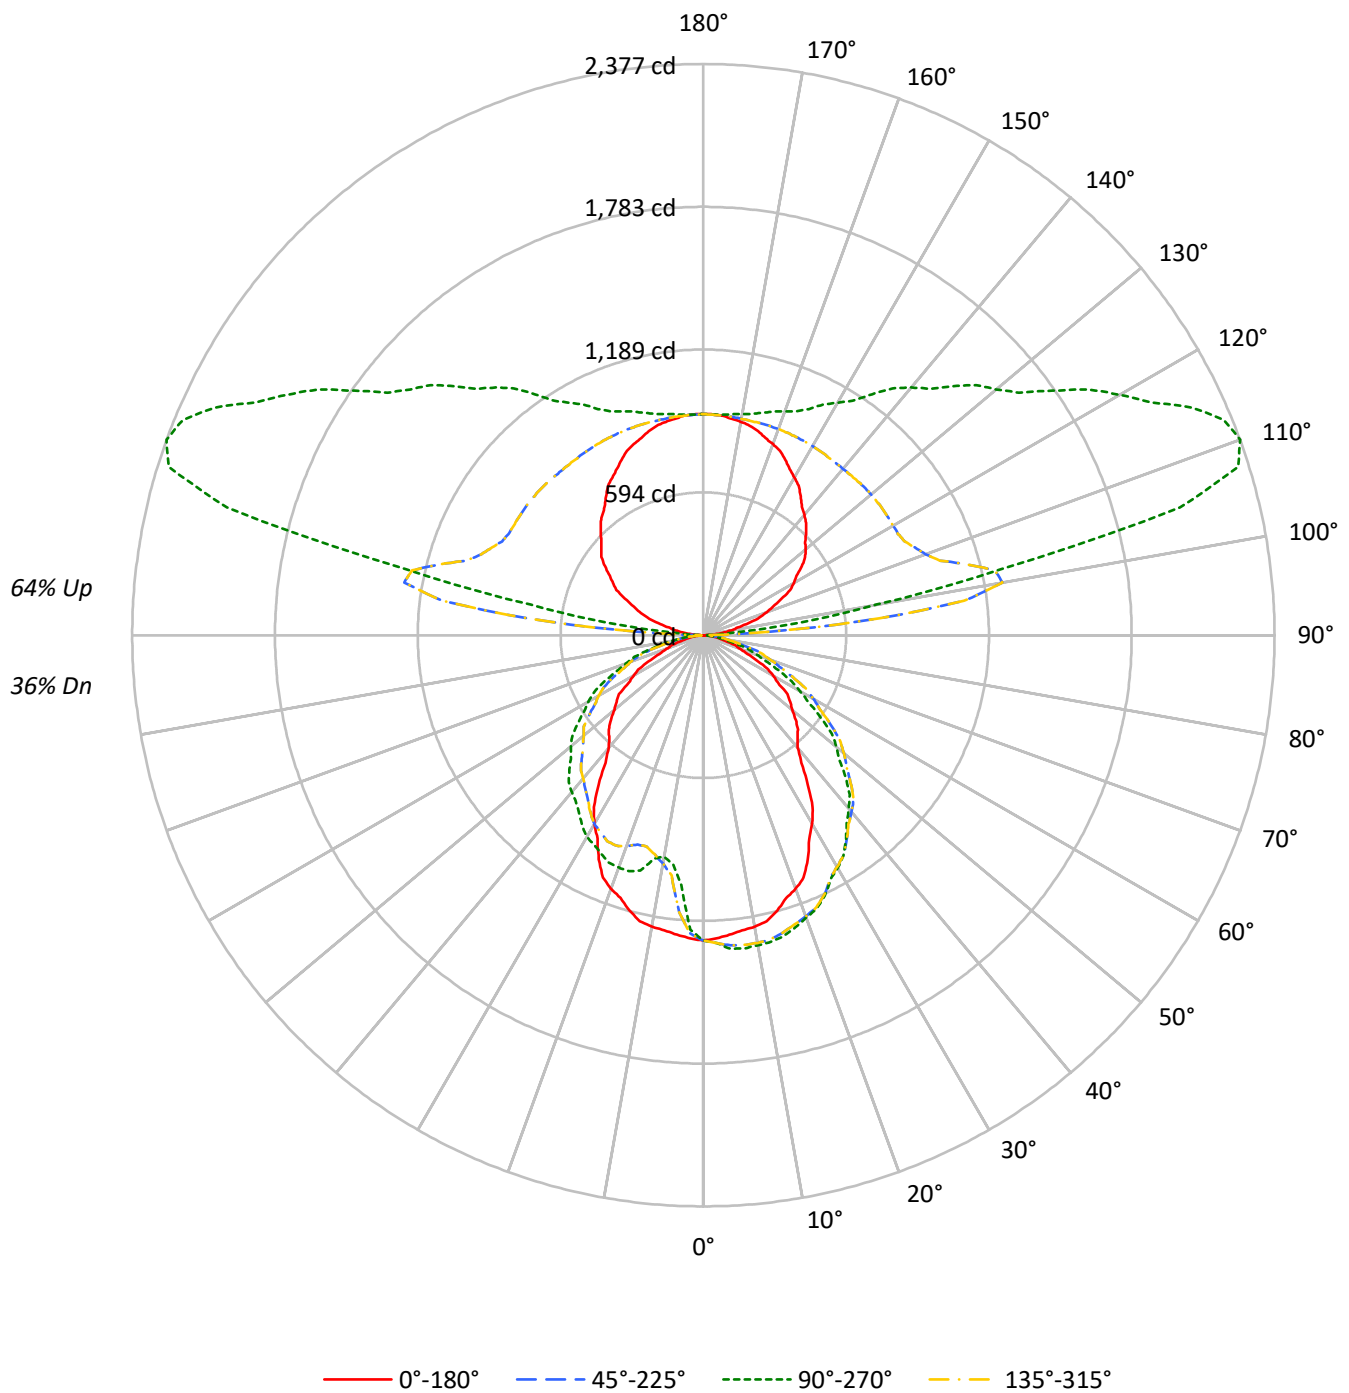

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	75	75	75	59	59	59	43	43	43
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	38	37	36
2	86	79	73	68	78	72	67	62	58	54	51	45	43	41	34	32	31
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26
4	72	61	54	48	65	56	49	44	45	41	37	36	32	30	27	24	23
5	66	55	47	41	59	50	43	38	40	35	32	32	28	25	24	22	20
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17
7	56	44	36	31	50	40	33	29	33	28	24	26	22	20	20	17	15
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	20518	20518	20518	20518
5°	20277	21235	20277	16924
10°	20189	21481	20189	15342
15°	19841	21653	19841	16959
20°	19295	21496	19295	17687
25°	18339	21323	18339	17900
30°	16897	20845	16897	18090
35°	14950	20386	14950	17767
40°	12874	19829	12874	17960
45°	12709	19119	12709	17995
50°	12125	18186	12125	18063
55°	12062	16777	12062	17886
60°	10814	14951	10814	17815
65°	9219	13173	9219	17310
70°	7440	11160	7440	16046
75°	6450	9220	6450	14747
80°	5495	6871	5495	11911
85°	3649	3649	3649	7299

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 19795 cd/sqm

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.3	1.3
10°-20°	319.5	3.6
20°-30°	485.2	5.5
30°-40°	569.6	6.4
40°-50°	578.0	6.5
50°-60°	506.4	5.7
60°-70°	359.2	4.1
70°-80°	185.0	2.1
80°-90°	39.8	0.5
90°-100°	351.9	4.0
100°-110°	1145.7	13.0
110°-120°	1133.3	12.8
120°-130°	926.1	10.5
130°-140°	756.9	8.6
140°-150°	589.6	6.7
150°-160°	425.0	4.8
160°-170°	259.7	2.9
170°-180°	87.6	1.0
0°-30°	919.0	10.4
0°-40°	1488.7	16.9
0°-60°	2573.0	29.1
0°-90°	3157.0	35.7
90°-120°	2630.9	29.8
90°-150°	4903.5	55.5
90°-180°	5676.0	64.3
0°-180°	8832.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1271	1271	1271	1271	1271	
5°	1251	1310	1251	1044	1251	119
15°	1187	1295	1187	1015	1187	333
25°	1029	1197	1029	1005	1029	470
35°	758	1034	758	901	758	473
45°	557	837	557	788	557	426
55°	428	596	428	635	428	371
65°	241	345	241	453	241	241
75°	103	148	103	236	103	112
85°	20	20	20	39	20	25
90°	0	7	0	7	0	3
95°	48	141	48	141	48	55
105°	195	2053	195	2053	195	208
115°	360	2242	360	2242	360	356
125°	500	1773	500	1773	500	445
135°	604	1464	604	1464	604	467
145°	706	1224	706	1224	706	442
155°	806	1039	806	1039	806	371
165°	879	958	879	958	879	248
175°	916	921	916	921	916	87
180°	920	920	920	920	920	

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8
2.5°	1262.9	1282.2	1282.6	1282.6	1282.6	1282.6	1282.6	1282.2	1262.9	1262.9	1243.2
5°	1251.1	1284.8	1295.4	1300.5	1310.2	1300.5	1295.4	1284.8	1251.1	1236.6	1157.5
7.5°	1239.2	1284.5	1300.3	1309.3	1314.1	1309.3	1300.3	1284.5	1239.2	1174.7	1008.7
10°	1231.4	1284.3	1300.3	1305.4	1310.2	1305.4	1300.3	1284.3	1231.4	1101.3	965.4
12.5°	1219.5	1276.4	1296.4	1301.4	1306.2	1301.4	1296.4	1276.4	1219.5	1035.6	933.9
15°	1187.0	1264.1	1280.6	1290.6	1295.4	1290.6	1280.6	1264.1	1187.0	979.9	911.2
17.5°	1146.6	1240.1	1261.9	1270.9	1274.7	1270.9	1261.9	1240.1	1146.6	929.9	912.2
20°	1123.0	1224.1	1246.1	1251.1	1251.1	1251.1	1246.1	1224.1	1123.0	906.3	935.8
22.5°	1091.5	1204.2	1226.4	1227.5	1231.4	1227.5	1226.4	1204.2	1091.5	878.6	947.7
25°	1029.4	1159.5	1192.0	1187.3	1196.9	1187.3	1192.0	1159.5	1029.4	841.6	945.7
27.5°	953.6	1117.3	1140.7	1145.7	1145.7	1145.7	1140.7	1117.3	953.6	805.2	926.0
30°	906.3	1089.3	1113.2	1118.1	1118.1	1118.1	1113.2	1089.3	906.3	781.1	906.3
32.5°	847.2	1064.9	1085.6	1086.6	1086.6	1086.6	1085.6	1064.9	847.2	756.6	874.8
35°	758.5	1023.4	1039.3	1039.2	1034.3	1039.2	1039.3	1023.4	758.5	720.0	837.3
37.5°	669.9	970.4	992.0	985.0	980.2	985.0	992.0	970.4	669.9	682.4	805.8
40°	610.8	938.2	960.5	945.6	940.8	945.6	960.5	938.2	610.8	654.1	778.2
42.5°	579.2	902.9	925.0	906.2	901.4	906.2	925.0	902.9	579.2	626.4	754.6
45°	556.6	845.5	866.9	847.0	837.3	847.0	866.9	845.5	556.6	585.5	714.2
47.5°	522.1	776.4	806.8	777.0	767.4	777.0	806.8	776.4	522.1	543.3	677.7
50°	482.7	733.1	763.4	733.7	724.0	733.7	763.4	733.1	482.7	511.6	650.2
52.5°	455.1	690.1	716.2	682.4	672.8	682.4	716.2	690.1	455.1	472.4	626.5
55°	428.5	626.0	645.2	610.4	596.0	610.4	645.2	626.0	428.5	414.1	581.2
57.5°	366.5	554.3	574.3	534.5	518.2	534.5	574.3	554.3	366.5	353.9	533.9
60°	334.9	503.5	527.0	487.1	463.0	487.1	527.0	503.5	334.9	310.9	502.4
62.5°	299.5	448.8	479.7	439.8	415.7	439.8	479.7	448.8	299.5	283.1	466.9
65°	241.3	371.4	408.8	368.9	344.8	368.9	408.8	371.4	241.3	251.0	408.8
67.5°	189.1	300.9	342.8	299.0	279.8	299.0	342.8	300.9	189.1	220.9	355.6
70°	157.6	253.9	295.5	255.7	236.4	255.7	295.5	253.9	157.6	201.0	320.2
72.5°	137.9	211.1	256.1	212.4	197.0	212.4	256.1	211.1	137.9	181.3	276.8
75°	103.4	146.8	197.0	157.4	147.8	157.4	197.0	146.8	103.4	146.8	216.7
77.5°	74.9	95.1	138.9	105.3	101.5	105.3	138.9	95.1	74.9	110.5	157.6
80°	59.1	63.9	103.4	73.9	73.9	73.9	103.4	63.9	59.1	83.2	118.2
82.5°	39.4	44.2	71.9	50.2	46.3	50.2	71.9	44.2	39.4	59.6	82.7
85°	19.7	19.7	29.6	19.7	19.7	19.7	29.6	19.7	19.7	29.3	39.4
87.5°	3.9	4.6	9.5	5.3	5.3	5.3	9.5	4.6	3.9	8.5	9.5
90°	0.0	3.3	7.9	6.8	6.8	6.8	7.9	3.3	0.0	3.3	7.9
92.5°	16.3	58.6	187.2	61.7	47.5	61.7	187.2	58.6	16.3	58.6	187.2
95°	47.5	144.9	645.0	230.0	141.4	230.0	645.0	144.9	47.5	144.9	645.0
97.5°	89.4	188.5	1094.6	666.7	406.9	666.7	1094.6	188.5	89.4	188.5	1094.6
100°	116.5	213.9	1263.9	1127.1	731.0	1127.1	1263.9	213.9	116.5	213.9	1263.9
102.5°	147.3	241.1	1243.1	1667.4	1267.8	1667.4	1243.1	241.1	147.3	241.1	1243.1
105°	194.6	280.9	1134.9	2167.7	2052.6	2167.7	1134.9	280.9	194.6	280.9	1134.9
107.5°	245.8	327.0	1032.2	2211.1	2333.0	2211.1	1032.2	327.0	245.8	327.0	1032.2
110°	282.9	357.0	983.3	2157.2	2377.4	2157.2	983.3	357.0	282.9	357.0	983.3

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
112.5°	313.7	386.9	952.5	2060.0	2343.9	2060.0	952.5	386.9	313.7	386.9	952.5
115°	359.8	429.5	924.5	1905.2	2241.6	1905.2	924.5	429.5	359.8	429.5	924.5
117.5°	407.4	470.2	913.6	1763.5	2098.3	1763.5	913.6	470.2	407.4	470.2	913.6
120°	434.5	496.5	910.9	1676.4	2000.6	1676.4	910.9	496.5	434.5	496.5	910.9
122.5°	460.8	521.8	911.8	1600.7	1902.8	1600.7	911.8	521.8	460.8	521.8	911.8
125°	500.1	557.7	912.0	1504.3	1773.1	1504.3	912.0	557.7	500.1	557.7	912.0
127.5°	533.9	592.7	911.8	1432.0	1656.1	1432.0	911.8	592.7	533.9	592.7	911.8
130°	555.6	615.3	910.9	1390.7	1590.9	1390.7	910.9	615.3	555.6	615.3	910.9
132.5°	574.6	637.0	910.0	1352.4	1540.2	1352.4	910.0	637.0	574.6	637.0	910.0
135°	604.2	667.3	907.5	1298.2	1464.2	1298.2	907.5	667.3	604.2	667.3	907.5
137.5°	633.2	696.7	905.0	1243.3	1390.7	1243.3	905.0	696.7	633.2	696.7	905.0
140°	654.0	714.9	904.1	1206.0	1345.4	1206.0	904.1	714.9	654.0	714.9	904.1
142.5°	673.9	732.1	904.1	1170.3	1294.7	1170.3	904.1	732.1	673.9	732.1	904.1
145°	706.1	758.1	905.2	1118.1	1224.3	1118.1	905.2	758.1	706.1	758.1	905.2
147.5°	737.3	782.4	906.8	1073.7	1155.7	1073.7	906.8	782.4	737.3	782.4	906.8
150°	758.1	798.0	908.6	1047.1	1116.8	1047.1	908.6	798.0	758.1	798.0	908.6
152.5°	778.9	811.7	909.5	1026.9	1082.4	1026.9	909.5	811.7	778.9	811.7	909.5
155°	805.7	832.2	910.9	1001.1	1038.7	1001.1	910.9	832.2	805.7	832.2	910.9
157.5°	831.0	850.0	912.2	982.1	1008.4	982.1	912.2	850.0	831.0	850.0	912.2
160°	846.4	861.9	913.1	970.2	991.2	970.2	913.1	861.9	846.4	861.9	913.1
162.5°	860.0	871.9	913.1	960.1	975.8	960.1	913.1	871.9	860.0	871.9	913.1
165°	879.2	886.9	913.1	947.3	958.4	947.3	913.1	886.9	879.2	886.9	913.1
167.5°	892.8	897.6	913.4	937.7	943.5	937.7	913.4	897.6	892.8	897.6	913.4
170°	901.8	904.0	914.3	931.3	933.5	931.3	914.3	904.0	901.8	904.0	914.3
172.5°	908.2	909.5	916.1	927.6	927.2	927.6	916.1	909.5	908.2	909.5	916.1
175°	916.5	916.5	916.5	923.3	921.1	923.3	916.5	916.5	916.5	916.5	916.5
177.5°	919.9	919.1	918.1	922.6	919.0	922.6	918.1	919.1	919.9	919.1	918.1
180°	919.9	919.9	919.9	919.9	919.9	919.9	919.9	919.9	919.9	919.9	919.9

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	1270.8	1270.8	1270.8	1270.8	1270.8	1270.8
2.5°	1231.3	1227.4	1231.3	1243.2	1262.9	1262.9
5°	1068.3	1044.2	1068.3	1157.5	1236.6	1251.1
7.5°	971.1	963.4	971.1	1008.7	1174.7	1239.2
10°	935.8	935.8	935.8	965.4	1101.3	1231.4
12.5°	932.3	951.6	932.3	933.9	1035.6	1219.5
15°	990.6	1014.6	990.6	911.2	979.9	1187.0
17.5°	1010.2	1029.4	1010.2	912.2	929.9	1146.6
20°	1010.2	1029.4	1010.2	935.8	906.3	1123.0
22.5°	1006.2	1025.5	1006.2	947.7	878.6	1091.5
25°	995.2	1004.8	995.2	945.7	841.6	1029.4
27.5°	975.4	982.1	975.4	926.0	805.2	953.6
30°	955.9	970.3	955.9	906.3	781.1	906.3
32.5°	935.9	938.8	935.9	874.8	756.6	847.2
35°	906.2	901.4	906.2	837.3	720.0	758.5
37.5°	866.0	871.8	866.0	805.8	682.4	669.9
40°	842.5	852.1	842.5	778.2	654.1	610.8
42.5°	818.8	828.5	818.8	754.6	626.4	579.2
45°	783.3	788.1	783.3	714.2	585.5	556.6
47.5°	741.9	746.7	741.9	677.7	543.3	522.1
50°	714.3	719.1	714.3	650.2	511.6	482.7
52.5°	682.8	687.6	682.8	626.5	472.4	455.1
55°	635.4	635.4	635.4	581.2	414.1	428.5
57.5°	581.3	587.1	581.3	533.9	353.9	366.5
60°	542.0	551.7	542.0	502.4	310.9	334.9
62.5°	506.5	512.2	506.5	466.9	283.1	299.5
65°	448.3	453.1	448.3	408.8	251.0	241.3
67.5°	383.3	387.1	383.3	355.6	220.9	189.1
70°	339.9	339.9	339.9	320.2	201.0	157.6
72.5°	296.6	300.5	296.6	276.8	181.3	137.9
75°	231.6	236.4	231.6	216.7	146.8	103.4
77.5°	166.6	171.4	166.6	157.6	110.5	74.9
80°	123.2	128.1	123.2	118.2	83.2	59.1
82.5°	87.7	88.7	87.7	82.7	59.6	39.4
85°	39.4	39.4	39.4	39.4	29.3	19.7
87.5°	9.2	9.2	9.2	9.5	8.5	3.9
90°	6.8	6.8	6.8	7.9	3.3	0.0
92.5°	61.7	47.5	61.7	187.2	58.6	16.3
95°	230.0	141.4	230.0	645.0	144.9	47.5
97.5°	666.7	406.9	666.7	1094.6	188.5	89.4
100°	1127.1	731.0	1127.1	1263.9	213.9	116.5
102.5°	1667.4	1267.8	1667.4	1243.1	241.1	147.3
105°	2167.7	2052.6	2167.7	1134.9	280.9	194.6
107.5°	2211.1	2333.0	2211.1	1032.2	327.0	245.8
110°	2157.2	2377.4	2157.2	983.3	357.0	282.9

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
112.5°	2060.0	2343.9	2060.0	952.5	386.9	313.7
115°	1905.2	2241.6	1905.2	924.5	429.5	359.8
117.5°	1763.5	2098.3	1763.5	913.6	470.2	407.4
120°	1676.4	2000.6	1676.4	910.9	496.5	434.5
122.5°	1600.7	1902.8	1600.7	911.8	521.8	460.8
125°	1504.3	1773.1	1504.3	912.0	557.7	500.1
127.5°	1432.0	1656.1	1432.0	911.8	592.7	533.9
130°	1390.7	1590.9	1390.7	910.9	615.3	555.6
132.5°	1352.4	1540.2	1352.4	910.0	637.0	574.6
135°	1298.2	1464.2	1298.2	907.5	667.3	604.2
137.5°	1243.3	1390.7	1243.3	905.0	696.7	633.2
140°	1206.0	1345.4	1206.0	904.1	714.9	654.0
142.5°	1170.3	1294.7	1170.3	904.1	732.1	673.9
145°	1118.1	1224.3	1118.1	905.2	758.1	706.1
147.5°	1073.7	1155.7	1073.7	906.8	782.4	737.3
150°	1047.1	1116.8	1047.1	908.6	798.0	758.1
152.5°	1026.9	1082.4	1026.9	909.5	811.7	778.9
155°	1001.1	1038.7	1001.1	910.9	832.2	805.7
157.5°	982.1	1008.4	982.1	912.2	850.0	831.0
160°	970.2	991.2	970.2	913.1	861.9	846.4
162.5°	960.1	975.8	960.1	913.1	871.9	860.0
165°	947.3	958.4	947.3	913.1	886.9	879.2
167.5°	937.7	943.5	937.7	913.4	897.6	892.8
170°	931.3	933.5	931.3	914.3	904.0	901.8
172.5°	927.6	927.2	927.6	916.1	909.5	908.2
175°	923.3	921.1	923.3	916.5	916.5	916.5
177.5°	922.6	919.0	922.6	918.1	919.1	919.9
180°	919.9	919.9	919.9	919.9	919.9	919.9

TEST NUMBER: P1191354

CATALOG NUMBER: SQ2-FA-125U-075D-L835-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.36	16.11	16.44	17.18	18.64	16.59	17.33	17.66	18.41	19.87
	3H	16.44	17.11	17.53	18.19	19.67	17.82	18.49	18.90	19.57	21.05
	4H	16.79	17.42	17.88	18.51	19.99	18.21	18.84	19.30	19.92	21.41
	6H	16.95	17.53	18.05	18.62	20.11	18.36	18.94	19.46	20.03	21.53
	8H	16.98	17.53	18.08	18.64	20.13	18.38	18.94	19.49	20.04	21.53
	12H	16.97	17.50	18.08	18.59	20.11	18.36	18.89	19.47	19.99	21.50
4H	2H	16.28	16.91	17.38	17.99	19.48	17.19	17.82	18.29	18.90	20.39
	3H	17.64	18.16	18.74	19.27	20.77	18.63	19.16	19.74	20.27	21.76
	4H	18.08	18.56	19.19	19.66	21.18	19.09	19.58	20.20	20.67	22.19
	6H	18.30	18.71	19.41	19.83	21.34	19.31	19.72	20.42	20.84	22.36
	8H	18.35	18.74	19.47	19.85	21.38	19.35	19.74	20.47	20.85	22.38
	12H	18.35	18.70	19.48	19.82	21.36	19.33	19.69	20.47	20.81	22.34
8H	4H	18.47	18.85	19.58	19.97	21.49	19.29	19.68	20.41	20.79	22.32
	6H	18.81	19.12	19.94	20.28	21.81	19.60	19.92	20.74	21.07	22.60
	8H	18.92	19.20	20.06	20.34	21.88	19.69	19.97	20.84	21.11	22.65
	12H	18.95	19.20	20.10	20.33	21.91	19.70	19.94	20.85	21.08	22.66
12H	4H	18.46	18.81	19.60	19.94	21.47	19.25	19.60	20.39	20.73	22.26
	6H	18.88	19.16	20.02	20.29	21.84	19.62	19.90	20.76	21.03	22.58
	8H	19.01	19.26	20.16	20.39	21.97	19.72	19.97	20.87	21.10	22.68