

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P562893

Luminaire Tested: **SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12**

Issue Date: 7/30/2021

Test Information

Test Method: LM-79-2019
Report Number: P562893
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-23, G2-2106-289-1)
Test Lab: INNOVATION CENTER
Issue Date: 7/30/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE WITH PERCEIVE PYRAMID CONTINUOUS LENS.
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17956.7 lumens
Efficiency: N/A
Efficacy: 140.9 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.26 / 1.37
Luminous Opening: Rectangular (W 0.29' x L: 12' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 127.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P562893
CATALOG NUMBER: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

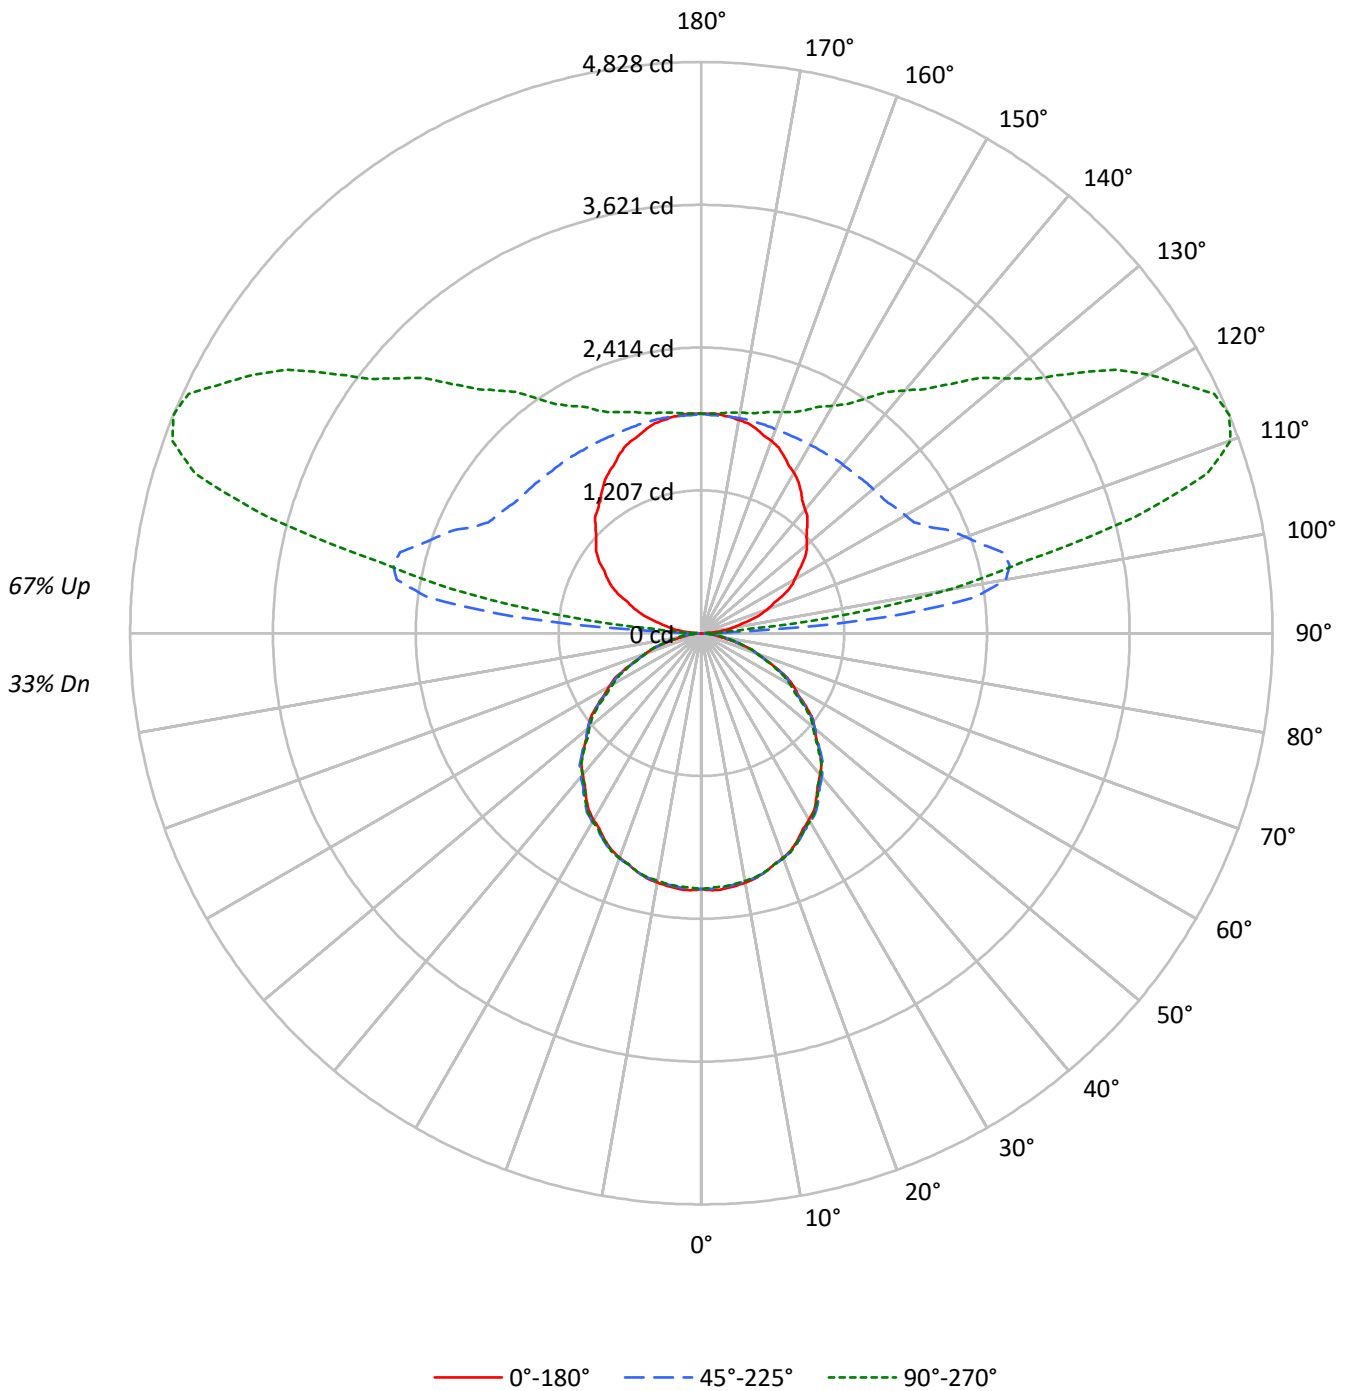



TEST NUMBER: P562893

CATALOG NUMBER: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	46	42	38	36	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	39	34	31	31	27	24	22	20	18	15
6	60	48	40	35	54	44	37	32	35	30	27	28	24	21	20	18	16	13
7	55	43	36	30	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	14	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	16	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6653	6653	6653
5°	6703	6660	6635
10°	6687	6655	6637
15°	6651	6651	6645
20°	6608	6627	6627
25°	6545	6593	6573
30°	6466	6544	6515
35°	6369	6467	6422
40°	6264	6353	6288
45°	6150	6194	6098
50°	5990	5990	5894
55°	5799	5724	5638
60°	5519	5408	5322
65°	5101	4999	4956
70°	4466	4502	4484
75°	3594	3975	3998
80°	2554	3370	3406
85°	1556	2826	2826



TEST NUMBER: P562893

CATALOG NUMBER: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	204.7	1.1
10°-20°	587.5	3.3
20°-30°	889.7	5.0
30°-40°	1066.6	5.9
40°-50°	1087.6	6.1
50°-60°	949.4	5.3
60°-70°	679.7	3.8
70°-80°	350.1	1.9
80°-90°	92.4	0.5
90°-100°	868.4	4.8
100°-110°	2397.4	13.4
110°-120°	2472.6	13.8
120°-130°	1986.9	11.1
130°-140°	1561.5	8.7
140°-150°	1197.6	6.7
150°-160°	860.7	4.8
160°-170°	526.4	2.9
170°-180°	177.5	1.0
0°-30°	1681.9	9.4
0°-40°	2748.6	15.3
0°-60°	4785.6	26.7
0°-90°	5907.7	32.9
90°-120°	5738.4	32.0
90°-150°	10484.4	58.4
90°-180°	12049.0	67.1
0°-180°	17956.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2163	2163	2163	2163	2163	
5°	2171	2150	2157	2151	2149	206
15°	2089	2072	2089	2089	2087	589
25°	1929	1915	1943	1937	1937	888
35°	1696	1693	1723	1711	1711	1061
45°	1414	1410	1424	1406	1402	1089
55°	1082	1068	1068	1052	1052	964
65°	701	685	687	681	681	693
75°	302	316	334	336	336	327
85°	44	68	80	82	80	60
90°	6	12	24	27	30	11
95°	128	470	1576	648	421	137
105°	427	659	2638	4027	3792	455
115°	766	925	2124	4206	4783	752
125°	1050	1195	1926	3259	3824	935
135°	1264	1400	1872	2639	2976	978
145°	1466	1567	1848	2247	2418	918
155°	1653	1708	1834	2016	2080	762
165°	1789	1812	1842	1914	1929	504
175°	1854	1857	1846	1872	1866	176
180°	1854	1854	1854	1854	1854	

TEST NUMBER: P562893

CATALOG NUMBER: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2163.2	2163.2	2163.2	2163.2	2163.2
2.5°	2176.1	2157.3	2163.2	2158.3	2150.4
5°	2171.2	2149.7	2157.2	2151.2	2149.2
7.5°	2155.6	2134.1	2144.0	2140.0	2138.0
10°	2141.2	2119.7	2131.2	2127.1	2125.2
12.5°	2122.0	2102.0	2115.2	2111.2	2110.8
15°	2089.1	2071.5	2089.1	2089.1	2087.1
17.5°	2047.9	2031.8	2050.7	2051.8	2050.7
20°	2019.0	2001.4	2025.0	2023.1	2025.0
22.5°	1983.8	1969.3	1994.6	1989.4	1991.4
25°	1928.9	1915.2	1942.9	1936.9	1936.9
27.5°	1864.0	1854.2	1884.4	1878.0	1878.0
30°	1820.7	1810.9	1842.8	1834.7	1834.7
32.5°	1772.7	1766.0	1796.3	1786.7	1786.7
35°	1696.5	1692.6	1722.6	1710.6	1710.6
37.5°	1618.0	1614.5	1641.7	1627.1	1622.4
40°	1560.3	1558.4	1582.4	1566.3	1566.3
42.5°	1502.6	1500.7	1521.5	1502.2	1502.2
45°	1414.1	1410.2	1424.1	1406.0	1402.1
47.5°	1317.6	1313.7	1322.4	1302.7	1300.7
50°	1251.9	1248.0	1251.9	1233.8	1231.8
52.5°	1184.6	1177.5	1178.2	1160.1	1159.7
55°	1081.6	1067.9	1067.6	1051.6	1051.6
57.5°	972.7	954.6	956.2	942.6	940.6
60°	897.3	877.8	879.3	867.3	865.3
62.5°	823.6	800.9	805.6	792.0	791.6
65°	701.0	685.4	687.0	681.0	681.0
67.5°	583.3	568.8	579.3	574.5	574.1
70°	496.7	487.0	500.7	500.7	498.7
72.5°	416.6	416.2	433.4	433.5	434.7
75°	302.5	316.2	334.5	336.5	336.5
77.5°	201.9	226.2	246.4	247.2	246.8
80°	144.2	171.6	190.3	194.2	192.3
82.5°	97.7	126.7	142.2	146.2	144.2
85°	44.1	67.6	80.1	82.1	80.1
87.5°	14.0	29.3	36.8	37.3	34.8
90°	5.9	11.7	23.7	26.8	29.7
92.5°	53.4	221.7	396.4	144.7	112.7
95°	127.6	469.9	1575.5	647.6	421.3
97.5°	211.3	526.3	2333.9	1796.9	1301.3
100°	273.0	560.2	2614.0	2632.4	2139.2
102.5°	332.3	598.6	2668.6	3252.5	2784.9
105°	427.3	659.3	2637.7	4026.9	3791.9
107.5°	528.1	734.7	2490.5	4400.3	4486.2
110°	599.3	785.0	2376.6	4480.6	4759.1

TEST NUMBER: P562893

CATALOG NUMBER: SQ4-PC3-100U-050D-835-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	663.4	842.1	2269.8	4417.2	4828.0
115°	765.5	925.1	2124.4	4205.6	4782.9
117.5°	854.5	1013.5	2028.9	3907.7	4564.5
120°	913.9	1070.5	1990.9	3706.0	4367.5
122.5°	970.8	1120.5	1960.0	3517.7	4144.4
125°	1050.3	1195.4	1925.6	3258.8	3824.5
127.5°	1118.0	1263.0	1905.4	3039.9	3527.8
130°	1163.1	1308.1	1895.9	2905.9	3349.8
132.5°	1205.8	1343.9	1886.4	2793.4	3195.5
135°	1264.0	1400.3	1872.2	2639.4	2975.9
137.5°	1329.2	1453.4	1865.1	2510.1	2797.3
140°	1364.8	1486.7	1860.3	2423.9	2676.3
142.5°	1405.2	1517.8	1855.6	2347.2	2569.5
145°	1465.7	1567.3	1848.5	2247.0	2418.1
147.5°	1523.9	1612.6	1841.9	2162.4	2295.3
150°	1566.6	1639.1	1839.6	2112.0	2219.4
152.5°	1599.8	1667.7	1837.2	2068.9	2157.6
155°	1652.6	1707.8	1833.6	2016.1	2079.9
157.5°	1701.3	1743.7	1834.2	1977.6	2021.2
160°	1729.8	1767.5	1836.6	1956.0	1987.9
162.5°	1753.5	1786.6	1839.0	1936.9	1961.8
165°	1789.1	1812.3	1842.5	1914.1	1928.6
167.5°	1816.4	1830.4	1845.5	1900.2	1904.8
170°	1830.7	1842.3	1845.5	1893.0	1893.0
172.5°	1842.5	1849.5	1845.5	1883.4	1881.1
175°	1854.4	1857.3	1845.5	1872.1	1866.3
177.5°	1859.2	1856.8	1844.9	1861.4	1856.8
180°	1854.4	1854.4	1854.4	1854.4	1854.4

(END OF REPORT)