

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934992

Luminaire Tested: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934992
REPORT IS A COMBINATION OF REPORTS P933720 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15206.0 lumens
Efficiency: N/A
Efficacy: 122.6 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 124
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

Luminous Intensity Polar Plot

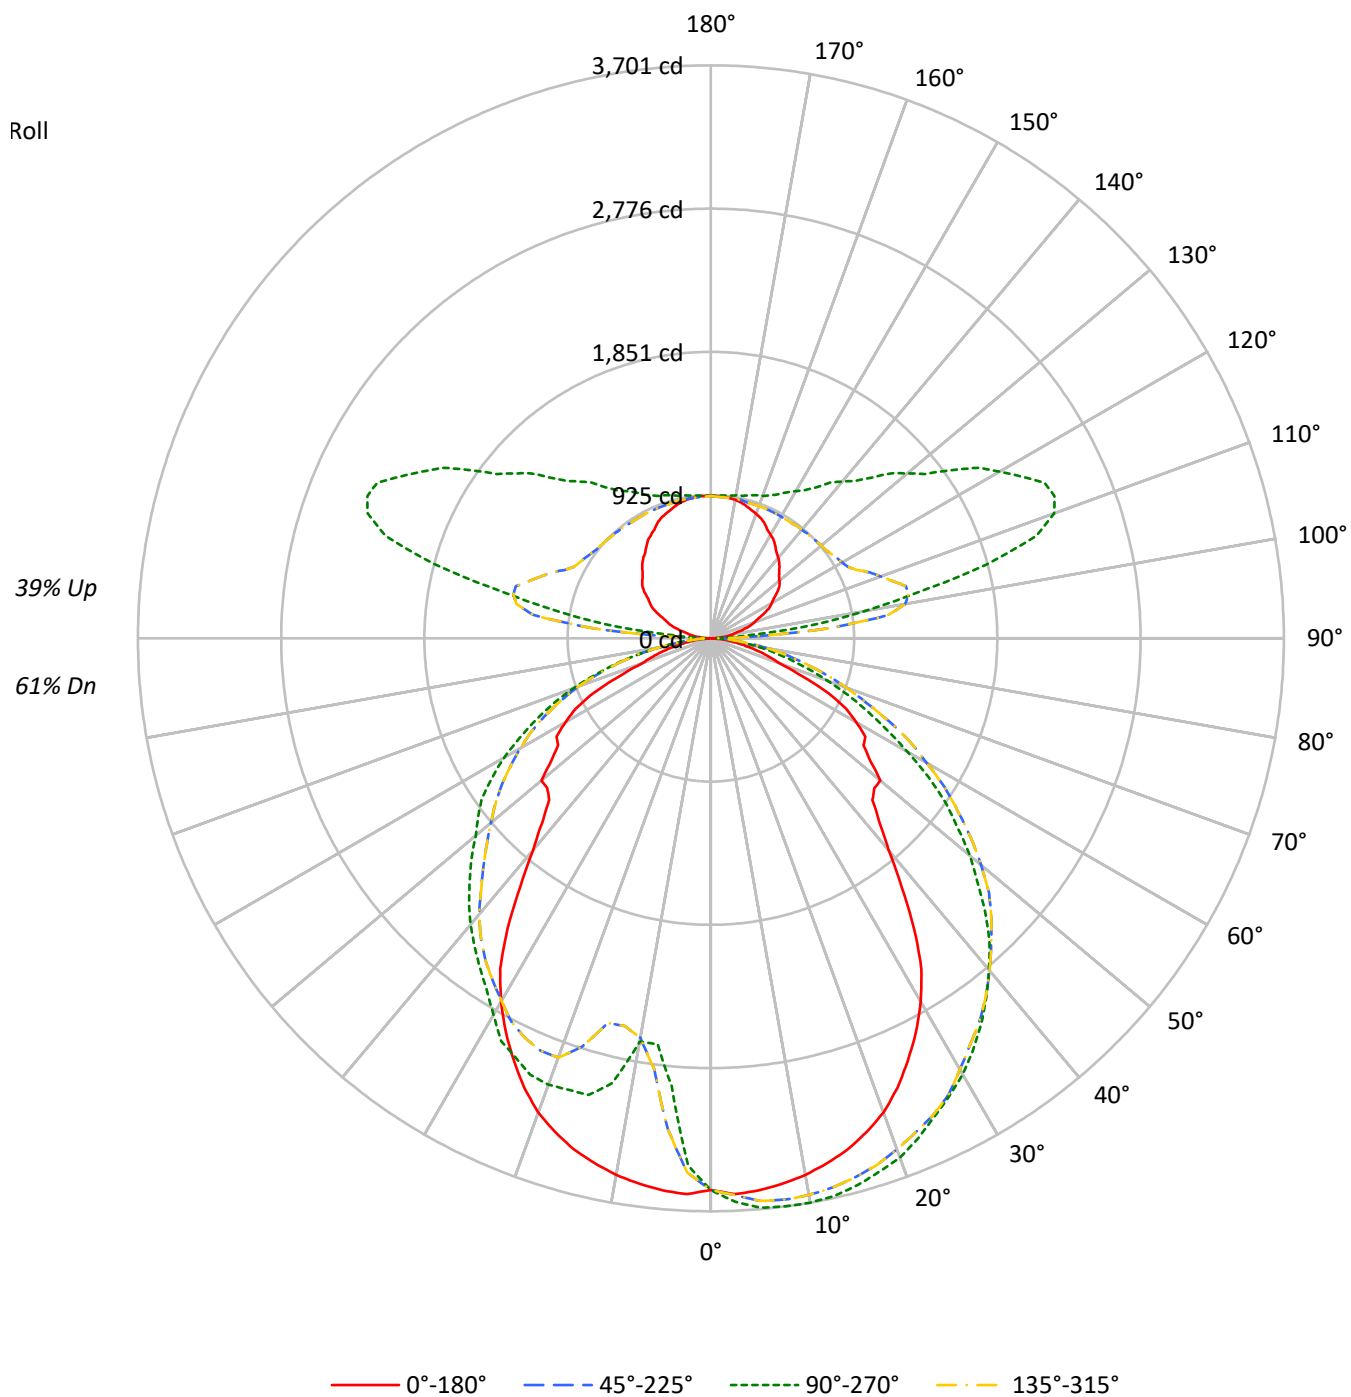

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56
2	91	84	78	72	85	79	73	68	69	65	61	60	57	54	52	49	47
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30
6	65	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26
7	60	47	39	33	56	45	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	29	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	31	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16530	16530	16530	16530
5°	16654	16687	16654	13121
10°	16543	16437	16543	11752
15°	16363	16081	16363	13428
20°	16020	15659	16020	13456
25°	15320	15044	15320	13171
30°	14415	14533	14415	12545
35°	12851	13887	12851	11857
40°	10708	13126	10708	11337
45°	9568	12236	9568	10739
50°	10164	11174	10164	10139
55°	9563	10030	9563	9792
60°	9857	8518	9857	8969
65°	8937	7041	8937	7871
70°	6189	5612	6189	6598
75°	5426	4148	5426	4967
80°	4374	2743	4374	2987
85°	2511	1453	2511	1235

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 14664 cd/sqm

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	321.6	2.1
10°-20°	913.1	6.0
20°-30°	1411.6	9.3
30°-40°	1685.1	11.1
40°-50°	1695.0	11.1
50°-60°	1474.8	9.7
60°-70°	1045.7	6.9
70°-80°	553.2	3.6
80°-90°	141.3	0.9
90°-100°	448.5	2.9
100°-110°	1179.1	7.8
110°-120°	1222.6	8.0
120°-130°	980.7	6.4
130°-140°	769.5	5.1
140°-150°	590.6	3.9
150°-160°	425.3	2.8
160°-170°	260.3	1.7
170°-180°	87.9	0.6
0°-30°	2646.3	17.4
0°-40°	4331.4	28.5
0°-60°	7501.2	49.3
0°-90°	9241.4	60.8
90°-120°	2850.2	18.7
90°-150°	5191.0	34.1
90°-180°	5965.0	39.2
0°-180°	15206.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3563	3563	3563	3563	3563	
5°	3580	3691	3580	2902	3580	340
15°	3418	3657	3418	3054	3418	962
25°	3010	3411	3010	2986	3010	1382
35°	2289	3044	2289	2599	2289	1416
45°	1476	2508	1476	2201	1476	1183
55°	1203	1851	1203	1807	1203	1106
65°	836	1116	836	1247	836	799
75°	317	529	317	634	317	333
85°	54	135	54	115	54	73
90°	6	24	6	24	6	7
95°	59	271	59	271	59	66
105°	212	1846	212	1846	212	225
115°	377	2377	377	2377	377	373
125°	525	1893	525	1893	525	466
135°	626	1469	626	1469	626	484
145°	726	1192	726	1192	726	455
155°	820	1026	820	1026	820	377
165°	885	956	885	956	885	250
175°	920	926	920	926	920	87
180°	920	920	920	920	920	

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9
2.5°	3593.2	3593.2	3613.4	3620.2	3620.2	3610.1	3599.9	3610.1	3640.4	3650.5	3647.2
5°	3579.7	3606.7	3643.8	3650.5	3657.2	3653.9	3647.2	3653.9	3687.6	3694.4	3697.7
7.5°	3552.7	3603.3	3650.5	3660.6	3670.8	3660.6	3657.2	3664.0	3697.7	3704.4	3704.4
10°	3519.1	3589.9	3643.8	3650.5	3660.6	3650.5	3650.5	3664.0	3697.7	3704.4	3707.8
12.5°	3471.9	3569.6	3620.2	3626.9	3640.4	3637.0	3633.7	3647.2	3680.8	3687.6	3687.6
15°	3418.0	3532.5	3579.7	3586.5	3610.1	3603.3	3603.3	3616.8	3653.9	3664.0	3660.6
17.5°	3343.8	3485.3	3539.3	3549.3	3566.3	3562.9	3566.3	3579.7	3613.4	3620.2	3623.5
20°	3259.5	3421.3	3485.3	3495.5	3512.3	3512.3	3512.3	3529.1	3562.9	3576.3	3576.3
22.5°	3144.9	3353.9	3421.3	3428.0	3448.3	3448.3	3455.0	3478.6	3508.9	3512.3	3512.3
25°	3010.1	3279.7	3337.0	3357.2	3377.4	3387.6	3397.8	3411.2	3421.3	3418.0	3421.3
27.5°	2868.5	3185.3	3259.5	3273.0	3299.9	3310.1	3323.6	3326.9	3330.3	3340.4	3333.6
30°	2710.1	3053.9	3165.1	3178.6	3222.5	3229.1	3215.7	3222.5	3239.3	3246.1	3252.7
32.5°	2531.4	2858.4	3067.4	3097.8	3138.2	3118.0	3114.6	3124.7	3151.6	3151.6	3158.4
35°	2288.7	2706.7	2976.3	3003.3	3033.6	3010.1	3023.6	3026.9	3043.8	3053.9	3050.5
37.5°	2022.5	2575.3	2882.0	2902.2	2925.8	2895.5	2915.7	2925.8	2939.3	2932.5	2932.5
40°	1786.5	2369.6	2770.8	2784.2	2804.4	2780.8	2801.1	2807.8	2814.6	2807.8	2804.4
42.5°	1611.2	2143.8	2652.7	2669.6	2656.1	2673.0	2679.7	2693.2	2683.1	2669.6	2669.6
45°	1476.4	2083.1	2524.7	2544.9	2524.7	2551.7	2561.8	2561.8	2531.4	2524.7	2521.3
47.5°	1432.5	1961.7	2396.6	2396.6	2386.5	2420.2	2437.0	2413.4	2383.1	2373.0	2373.0
50°	1429.2	1827.0	2221.3	2207.8	2255.0	2295.5	2278.6	2255.0	2231.4	2194.4	2194.4
52.5°	1297.7	1661.7	1995.5	2046.1	2120.2	2143.8	2116.8	2093.2	2052.8	2035.9	2022.5
55°	1203.4	1489.9	1789.9	1891.0	1968.5	1998.9	1948.3	1924.7	1864.0	1854.0	1847.2
57.5°	1183.1	1240.4	1601.1	1729.2	1823.6	1820.2	1789.9	1746.1	1695.5	1685.3	1682.0
60°	1085.3	896.6	1398.9	1550.6	1648.3	1638.2	1611.2	1570.8	1523.6	1516.8	1510.1
62.5°	984.2	650.6	1169.6	1341.5	1479.8	1476.4	1452.8	1392.1	1358.4	1341.5	1328.1
65°	835.9	546.1	832.6	1115.7	1314.6	1321.3	1270.8	1227.0	1189.8	1169.6	1166.3
67.5°	637.0	444.9	562.9	930.4	1156.2	1149.4	1085.3	1065.1	1018.0	1007.9	987.6
70°	471.9	296.6	391.0	755.1	1001.1	984.2	933.7	910.1	866.3	842.7	829.2
72.5°	391.0	239.3	286.5	586.5	842.7	822.5	778.7	751.7	714.6	694.4	680.9
75°	316.8	252.8	219.1	434.9	684.3	670.8	630.4	603.4	573.0	546.1	549.4
77.5°	232.6	236.0	175.3	320.2	542.7	522.5	498.9	465.1	451.7	424.7	424.7
80°	175.3	185.4	131.5	219.1	391.0	391.0	370.8	347.2	323.6	310.2	310.2
82.5°	117.9	117.9	97.7	138.2	266.3	256.2	242.7	236.0	222.5	215.7	215.7
85°	53.9	67.4	60.7	84.3	144.9	151.7	151.7	144.9	141.5	134.9	138.2
87.5°	16.8	30.4	37.1	47.2	74.2	77.5	80.9	80.9	80.9	84.3	84.3
90°	6.2	11.2	16.1	17.3	27.2	40.3	46.9	41.7	31.3	23.5	23.5
92.5°	24.7	66.7	108.8	119.2	167.6	232.1	264.3	231.7	166.3	117.3	112.6
95°	59.3	136.2	212.9	232.2	412.2	652.4	772.5	689.3	523.0	398.3	384.2
97.5°	102.5	170.3	238.1	255.1	555.4	955.8	1156.0	1103.4	998.3	919.5	892.6
100°	135.9	197.3	258.9	274.2	607.5	1051.8	1273.9	1277.8	1285.4	1291.2	1259.1
102.5°	164.2	221.6	279.0	293.3	631.3	1082.0	1307.2	1374.2	1508.1	1608.6	1581.2
105°	212.4	261.1	309.6	321.7	649.0	1085.3	1303.6	1453.7	1753.9	1979.1	1964.3
107.5°	261.8	307.2	352.4	363.7	652.3	1037.0	1229.5	1438.8	1857.6	2171.8	2175.4
110°	295.2	336.1	376.9	387.1	647.3	994.2	1167.7	1401.8	1870.0	2221.2	2236.5

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	327.9	366.8	405.8	415.5	647.5	956.9	1111.5	1351.2	1830.3	2189.7	2213.3
115°	377.3	413.2	449.2	458.2	653.5	913.9	1044.2	1275.0	1736.6	2082.8	2115.6
117.5°	426.1	458.8	491.4	499.6	665.7	887.1	997.9	1206.2	1622.8	1935.2	1971.5
120°	454.5	485.2	515.9	523.6	675.5	878.1	979.4	1169.7	1550.4	1835.8	1871.1
122.5°	482.3	513.3	544.3	552.1	689.7	873.3	965.1	1136.5	1479.4	1736.4	1771.2
125°	524.9	553.2	581.4	588.4	708.9	869.4	949.7	1095.3	1386.4	1604.9	1636.9
127.5°	559.5	588.0	616.5	623.7	728.1	867.2	936.7	1061.7	1311.7	1499.3	1526.3
130°	578.0	608.7	639.4	647.1	742.0	868.6	931.9	1043.1	1265.7	1432.6	1457.6
132.5°	597.1	627.9	658.7	666.3	753.4	869.4	927.5	1027.1	1226.4	1375.8	1398.2
135°	625.5	653.5	681.6	688.5	765.7	868.6	920.1	1003.6	1170.4	1295.5	1314.8
137.5°	654.6	682.3	709.9	716.9	784.3	874.0	918.8	989.3	1130.5	1236.2	1252.0
140°	678.7	704.2	729.7	736.0	795.5	874.9	914.5	975.5	1097.3	1188.7	1203.5
142.5°	697.2	720.8	744.4	750.3	805.1	878.1	914.5	968.0	1075.1	1155.4	1168.0
145°	725.6	746.2	766.7	771.9	817.4	878.1	908.4	952.2	1039.7	1105.4	1114.9
147.5°	754.0	774.0	794.1	799.1	835.5	884.0	908.4	942.8	1011.6	1063.3	1071.3
150°	772.5	790.6	808.8	813.2	844.9	887.2	908.4	937.4	995.6	1039.2	1045.7
152.5°	791.6	805.4	819.1	822.5	851.1	889.2	908.4	933.2	982.9	1020.1	1025.0
155°	820.0	830.2	840.3	842.9	864.7	893.8	908.4	928.1	967.6	997.3	1000.5
157.5°	841.0	850.9	860.7	863.2	878.3	898.3	908.4	923.7	954.5	977.5	979.8
160°	855.3	862.9	870.6	872.5	884.4	900.4	908.4	921.5	947.9	967.6	968.9
162.5°	869.4	875.2	881.0	882.5	891.1	902.6	908.4	919.5	941.7	958.4	959.5
165°	884.8	890.0	895.3	896.6	900.5	905.8	908.4	916.3	932.3	944.2	945.5
167.5°	899.1	901.6	904.1	904.7	908.0	912.3	914.5	919.7	930.2	938.0	938.5
170°	908.4	910.8	913.3	913.9	914.1	914.4	914.5	919.7	930.2	938.0	938.0
172.5°	913.3	913.8	914.4	914.5	914.5	914.5	914.5	918.6	926.9	933.1	932.6
175°	920.1	920.1	920.1	920.1	918.2	915.7	914.5	917.1	922.4	926.3	926.3
177.5°	920.1	920.1	920.1	920.1	918.6	916.7	915.7	917.8	921.9	925.0	924.5
180°	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9
2.5°	3653.9	3643.8	3653.9	3647.2	3650.5	3640.4	3610.1	3599.9	3610.1	3620.2	3620.2
5°	3697.7	3691.0	3697.7	3697.7	3694.4	3687.6	3653.9	3647.2	3653.9	3657.2	3650.5
7.5°	3711.2	3701.0	3711.2	3704.4	3704.4	3697.7	3664.0	3657.2	3660.6	3670.8	3660.6
10°	3711.2	3701.0	3711.2	3707.8	3704.4	3697.7	3664.0	3650.5	3650.5	3660.6	3650.5
12.5°	3694.4	3687.6	3694.4	3687.6	3687.6	3680.8	3647.2	3633.7	3637.0	3640.4	3626.9
15°	3667.4	3657.2	3667.4	3660.6	3664.0	3653.9	3616.8	3603.3	3603.3	3610.1	3586.5
17.5°	3626.9	3613.4	3626.9	3623.5	3620.2	3613.4	3579.7	3566.3	3562.9	3566.3	3549.3
20°	3579.7	3569.6	3579.7	3576.3	3576.3	3562.9	3529.1	3512.3	3512.3	3512.3	3495.5
22.5°	3505.5	3495.5	3505.5	3512.3	3512.3	3508.9	3478.6	3455.0	3448.3	3448.3	3428.0
25°	3421.3	3411.2	3421.3	3421.3	3418.0	3421.3	3411.2	3397.8	3387.6	3377.4	3357.2
27.5°	3340.4	3333.6	3340.4	3333.6	3340.4	3330.3	3326.9	3323.6	3310.1	3299.9	3273.0
30°	3259.5	3252.7	3259.5	3252.7	3246.1	3239.3	3222.5	3215.7	3229.1	3222.5	3178.6
32.5°	3158.4	3151.6	3158.4	3158.4	3151.6	3151.6	3124.7	3114.6	3118.0	3138.2	3097.8
35°	3053.9	3043.8	3053.9	3050.5	3053.9	3043.8	3026.9	3023.6	3010.1	3033.6	3003.3
37.5°	2932.5	2922.5	2932.5	2932.5	2932.5	2939.3	2925.8	2915.7	2895.5	2925.8	2902.2
40°	2807.8	2794.4	2807.8	2804.4	2807.8	2814.6	2807.8	2801.1	2780.8	2804.4	2784.2
42.5°	2666.3	2662.9	2666.3	2669.6	2669.6	2683.1	2693.2	2679.7	2673.0	2656.1	2669.6
45°	2514.6	2507.8	2514.6	2521.3	2524.7	2531.4	2561.8	2561.8	2551.7	2524.7	2544.9
47.5°	2352.8	2335.9	2352.8	2373.0	2373.0	2383.1	2413.4	2437.0	2420.2	2386.5	2396.6
50°	2180.8	2184.2	2180.8	2194.4	2194.4	2231.4	2255.0	2278.6	2295.5	2255.0	2207.8
52.5°	2012.3	2008.9	2012.3	2022.5	2035.9	2052.8	2093.2	2116.8	2143.8	2120.2	2046.1
55°	1843.8	1850.6	1843.8	1847.2	1854.0	1864.0	1924.7	1948.3	1998.9	1968.5	1891.0
57.5°	1675.3	1665.1	1675.3	1682.0	1685.3	1695.5	1746.1	1789.9	1820.2	1823.6	1729.2
60°	1479.8	1466.3	1479.8	1510.1	1516.8	1523.6	1570.8	1611.2	1638.2	1648.3	1550.6
62.5°	1307.8	1284.2	1307.8	1328.1	1341.5	1358.4	1392.1	1452.8	1476.4	1479.8	1341.5
65°	1125.8	1115.7	1125.8	1166.3	1169.6	1189.8	1227.0	1270.8	1321.3	1314.6	1115.7
67.5°	960.6	960.6	960.6	987.6	1007.9	1018.0	1065.1	1085.3	1149.4	1156.2	930.4
70°	809.0	805.6	809.0	829.2	842.7	866.3	910.1	933.7	984.2	1001.1	755.1
72.5°	664.0	660.6	664.0	680.9	694.4	714.6	751.7	778.7	822.5	842.7	586.5
75°	535.9	529.2	535.9	549.4	546.1	573.0	603.4	630.4	670.8	684.3	434.9
77.5°	411.2	411.2	411.2	424.7	424.7	451.7	465.1	498.9	522.5	542.7	320.2
80°	306.8	303.4	306.8	310.2	310.2	323.6	347.2	370.8	391.0	391.0	219.1
82.5°	215.7	209.0	215.7	215.7	215.7	222.5	236.0	242.7	256.2	266.3	138.2
85°	134.9	134.9	134.9	138.2	134.9	141.5	144.9	151.7	151.7	144.9	84.3
87.5°	87.6	84.3	87.6	84.3	84.3	80.9	80.9	80.9	77.5	74.2	47.2
90°	23.5	23.5	23.5	23.5	23.5	31.3	41.7	46.9	40.3	27.2	17.3
92.5°	94.0	75.3	94.0	112.6	117.3	166.3	231.7	264.3	232.1	167.6	119.2
95°	327.7	271.1	327.7	384.2	398.3	523.0	689.3	772.5	652.4	412.2	232.2
97.5°	784.9	677.4	784.9	892.6	919.5	998.3	1103.4	1156.0	955.8	555.4	255.1
100°	1131.1	1002.9	1131.1	1259.1	1291.2	1285.4	1277.8	1273.9	1051.8	607.5	274.2
102.5°	1471.4	1361.6	1471.4	1581.2	1608.6	1508.1	1374.2	1307.2	1082.0	631.3	293.3
105°	1905.2	1846.3	1905.2	1964.3	1979.1	1753.9	1453.7	1303.6	1085.3	649.0	321.7
107.5°	2189.6	2203.8	2189.6	2175.4	2171.8	1857.6	1438.8	1229.5	1037.0	652.3	363.7
110°	2298.1	2359.5	2298.1	2236.5	2221.2	1870.0	1401.8	1167.7	994.2	647.3	387.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	2307.6	2402.1	2307.6	2213.3	2189.7	1830.3	1351.2	1111.5	956.9	647.5	415.5
115°	2246.5	2377.4	2246.5	2115.6	2082.8	1736.6	1275.0	1044.2	913.9	653.5	458.2
117.5°	2116.7	2261.9	2116.7	1971.5	1935.2	1622.8	1206.2	997.9	887.1	665.7	499.6
120°	2012.2	2153.3	2012.2	1871.1	1835.8	1550.4	1169.7	979.4	878.1	675.5	523.6
122.5°	1910.3	2049.5	1910.3	1771.2	1736.4	1479.4	1136.5	965.1	873.3	689.7	552.1
125°	1765.1	1893.3	1765.1	1636.9	1604.9	1386.4	1095.3	949.7	869.4	708.9	588.4
127.5°	1634.4	1742.6	1634.4	1526.3	1499.3	1311.7	1061.7	936.7	867.2	728.1	623.7
130°	1557.4	1657.3	1557.4	1457.6	1432.6	1265.7	1043.1	931.9	868.6	742.0	647.1
132.5°	1487.6	1577.1	1487.6	1398.2	1375.8	1226.4	1027.1	927.5	869.4	753.4	666.3
135°	1391.9	1469.0	1391.9	1314.8	1295.5	1170.4	1003.6	920.1	868.6	765.7	688.5
137.5°	1315.1	1378.3	1315.1	1252.0	1236.2	1130.5	989.3	918.8	874.0	784.3	716.9
140°	1262.5	1321.5	1262.5	1203.5	1188.7	1097.3	975.5	914.5	874.9	795.5	736.0
142.5°	1218.8	1269.6	1218.8	1168.0	1155.4	1075.1	968.0	914.5	878.1	805.1	750.3
145°	1153.4	1191.8	1153.4	1114.9	1105.4	1039.7	952.2	908.4	878.1	817.4	771.9
147.5°	1103.1	1134.9	1103.1	1071.3	1063.3	1011.6	942.8	908.4	884.0	835.5	799.1
150°	1071.5	1097.3	1071.5	1045.7	1039.2	995.6	937.4	908.4	887.2	844.9	813.2
152.5°	1044.4	1063.9	1044.4	1025.0	1020.1	982.9	933.2	908.4	889.2	851.1	822.5
155°	1013.4	1026.3	1013.4	1000.5	997.3	967.6	928.1	908.4	893.8	864.7	842.9
157.5°	988.8	997.9	988.8	979.8	977.5	954.5	923.7	908.4	898.3	878.3	863.2
160°	974.2	979.4	974.2	968.9	967.6	947.9	921.5	908.4	900.4	884.4	872.5
162.5°	964.5	969.5	964.5	959.5	958.4	941.7	919.5	908.4	902.6	891.1	882.5
165°	950.7	955.9	950.7	945.5	944.2	932.3	916.3	908.4	905.8	900.5	896.6
167.5°	940.7	942.9	940.7	938.5	938.0	930.2	919.7	914.5	912.3	908.0	904.7
170°	938.0	938.0	938.0	938.0	938.0	930.2	919.7	914.5	914.4	914.1	913.9
172.5°	930.7	928.8	930.7	932.6	933.1	926.9	918.6	914.5	914.5	914.5	914.5
175°	926.3	926.3	926.3	926.3	926.3	922.4	917.1	914.5	915.7	918.2	920.1
177.5°	922.3	920.1	922.3	924.5	925.0	921.9	917.8	915.7	916.7	918.6	920.1
180°	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9
2.5°	3613.4	3593.2	3593.2	3559.5	3546.1	3535.9	3519.1	3468.5	3455.0	3441.5	3461.8
5°	3643.8	3606.7	3579.7	3519.1	3468.5	3448.3	3384.2	3262.9	3182.0	3121.3	3087.6
7.5°	3650.5	3603.3	3552.7	3458.4	3337.0	3283.1	3087.6	2865.1	2804.4	2750.6	2716.8
10°	3643.8	3589.9	3519.1	3377.4	3091.0	2996.6	2801.1	2656.1	2619.1	2608.9	2619.1
12.5°	3620.2	3569.6	3471.9	3235.9	2834.8	2770.8	2656.1	2571.9	2565.1	2582.0	2673.0
15°	3579.7	3532.5	3418.0	3047.2	2693.2	2646.1	2565.1	2534.8	2571.9	2689.9	2962.9
17.5°	3539.3	3485.3	3343.8	2861.8	2585.3	2551.7	2494.4	2555.0	2764.0	2922.5	3013.4
20°	3485.3	3421.3	3259.5	2726.9	2507.8	2477.5	2450.6	2723.6	2882.0	2939.3	2989.9
22.5°	3421.3	3353.9	3144.9	2632.5	2427.0	2403.3	2420.2	2818.0	2882.0	2922.5	2966.3
25°	3337.0	3279.7	3010.1	2558.4	2362.9	2335.9	2400.0	2807.8	2844.9	2855.0	2942.7
27.5°	3259.5	3185.3	2868.5	2491.0	2285.3	2275.3	2416.8	2764.0	2791.0	2801.1	2895.5
30°	3165.1	3053.9	2710.1	2420.2	2204.4	2201.1	2420.2	2710.1	2703.3	2730.3	2824.7
32.5°	3067.4	2858.4	2531.4	2332.5	2127.0	2123.6	2396.6	2629.1	2622.5	2659.5	2730.3
35°	2976.3	2706.7	2288.7	2231.4	2029.2	2032.5	2339.3	2534.8	2538.2	2571.9	2615.7
37.5°	2882.0	2575.3	2022.5	2120.2	1934.8	1934.8	2261.7	2447.2	2440.4	2450.6	2511.2
40°	2770.8	2369.6	1786.5	1975.3	1847.2	1837.0	2167.4	2352.8	2329.1	2325.9	2410.1
42.5°	2652.7	2143.8	1611.2	1783.1	1746.1	1732.5	2052.8	2238.2	2194.4	2204.4	2312.3
45°	2524.7	2083.1	1476.4	1506.7	1641.5	1631.4	1928.1	2106.7	2076.4	2103.4	2214.6
47.5°	2396.6	1961.7	1432.5	1250.6	1530.4	1527.0	1789.9	1978.7	1961.7	1988.7	2106.7
50°	2221.3	1827.0	1429.2	1071.9	1405.6	1419.1	1624.7	1854.0	1854.0	1877.5	2002.3
52.5°	1995.5	1661.7	1297.7	970.8	1260.6	1301.1	1479.8	1746.1	1752.8	1776.4	1887.6
55°	1789.9	1489.9	1203.4	893.2	1088.7	1176.4	1338.2	1634.8	1648.3	1671.9	1773.0
57.5°	1601.1	1240.4	1183.1	802.3	930.4	1014.6	1213.4	1527.0	1533.6	1554.0	1651.7
60°	1398.9	896.6	1085.3	704.5	792.1	856.2	1098.9	1398.9	1422.5	1435.9	1520.2
62.5°	1169.6	650.6	984.2	637.0	724.7	738.2	1004.5	1277.5	1307.8	1318.0	1368.5
65°	832.6	546.1	835.9	579.8	653.9	657.3	903.4	1152.8	1179.8	1196.6	1233.6
67.5°	562.9	444.9	637.0	525.8	600.0	603.4	805.6	1007.9	1044.9	1058.4	1082.1
70°	391.0	296.6	471.9	468.5	539.3	546.1	701.1	876.4	910.1	920.2	933.7
72.5°	286.5	239.3	391.0	421.3	475.3	482.1	593.2	728.1	761.7	771.9	778.7
75°	219.1	252.8	316.8	367.4	404.5	407.9	485.4	593.2	616.8	623.6	627.0
77.5°	175.3	236.0	232.6	296.6	330.4	323.6	380.9	458.5	478.7	478.7	478.7
80°	131.5	185.4	175.3	212.3	242.7	236.0	273.0	327.0	333.7	340.4	337.0
82.5°	97.7	117.9	117.9	134.9	161.8	155.1	182.1	212.3	212.3	212.3	219.1
85°	60.7	67.4	53.9	70.8	91.0	87.6	101.1	114.6	117.9	117.9	111.3
87.5°	37.1	30.4	16.8	27.0	40.4	40.4	47.2	50.6	47.2	47.2	47.2
90°	16.1	11.2	6.2	11.2	16.1	17.3	27.2	40.3	46.9	41.7	31.3
92.5°	108.8	66.7	24.7	66.7	108.8	119.2	167.6	232.1	264.3	231.7	166.3
95°	212.9	136.2	59.3	136.2	212.9	232.2	412.2	652.4	772.5	689.3	523.0
97.5°	238.1	170.3	102.5	170.3	238.1	255.1	555.4	955.8	1156.0	1103.4	998.3
100°	258.9	197.3	135.9	197.3	258.9	274.2	607.5	1051.8	1273.9	1277.8	1285.4
102.5°	279.0	221.6	164.2	221.6	279.0	293.3	631.3	1082.0	1307.2	1374.2	1508.1
105°	309.6	261.1	212.4	261.1	309.6	321.7	649.0	1085.3	1303.6	1453.7	1753.9
107.5°	352.4	307.2	261.8	307.2	352.4	363.7	652.3	1037.0	1229.5	1438.8	1857.6
110°	376.9	336.1	295.2	336.1	376.9	387.1	647.3	994.2	1167.7	1401.8	1870.0

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	405.8	366.8	327.9	366.8	405.8	415.5	647.5	956.9	1111.5	1351.2	1830.3
115°	449.2	413.2	377.3	413.2	449.2	458.2	653.5	913.9	1044.2	1275.0	1736.6
117.5°	491.4	458.8	426.1	458.8	491.4	499.6	665.7	887.1	997.9	1206.2	1622.8
120°	515.9	485.2	454.5	485.2	515.9	523.6	675.5	878.1	979.4	1169.7	1550.4
122.5°	544.3	513.3	482.3	513.3	544.3	552.1	689.7	873.3	965.1	1136.5	1479.4
125°	581.4	553.2	524.9	553.2	581.4	588.4	708.9	869.4	949.7	1095.3	1386.4
127.5°	616.5	588.0	559.5	588.0	616.5	623.7	728.1	867.2	936.7	1061.7	1311.7
130°	639.4	608.7	578.0	608.7	639.4	647.1	742.0	868.6	931.9	1043.1	1265.7
132.5°	658.7	627.9	597.1	627.9	658.7	666.3	753.4	869.4	927.5	1027.1	1226.4
135°	681.6	653.5	625.5	653.5	681.6	688.5	765.7	868.6	920.1	1003.6	1170.4
137.5°	709.9	682.3	654.6	682.3	709.9	716.9	784.3	874.0	918.8	989.3	1130.5
140°	729.7	704.2	678.7	704.2	729.7	736.0	795.5	874.9	914.5	975.5	1097.3
142.5°	744.4	720.8	697.2	720.8	744.4	750.3	805.1	878.1	914.5	968.0	1075.1
145°	766.7	746.2	725.6	746.2	766.7	771.9	817.4	878.1	908.4	952.2	1039.7
147.5°	794.1	774.0	754.0	774.0	794.1	799.1	835.5	884.0	908.4	942.8	1011.6
150°	808.8	790.6	772.5	790.6	808.8	813.2	844.9	887.2	908.4	937.4	995.6
152.5°	819.1	805.4	791.6	805.4	819.1	822.5	851.1	889.2	908.4	933.2	982.9
155°	840.3	830.2	820.0	830.2	840.3	842.9	864.7	893.8	908.4	928.1	967.6
157.5°	860.7	850.9	841.0	850.9	860.7	863.2	878.3	898.3	908.4	923.7	954.5
160°	870.6	862.9	855.3	862.9	870.6	872.5	884.4	900.4	908.4	921.5	947.9
162.5°	881.0	875.2	869.4	875.2	881.0	882.5	891.1	902.6	908.4	919.5	941.7
165°	895.3	890.0	884.8	890.0	895.3	896.6	900.5	905.8	908.4	916.3	932.3
167.5°	904.1	901.6	899.1	901.6	904.1	904.7	908.0	912.3	914.5	919.7	930.2
170°	913.3	910.8	908.4	910.8	913.3	913.9	914.1	914.4	914.5	919.7	930.2
172.5°	914.4	913.8	913.3	913.8	914.4	914.5	914.5	914.5	914.5	918.6	926.9
175°	920.1	920.1	920.1	920.1	920.1	920.1	918.2	915.7	914.5	917.1	922.4
177.5°	920.1	920.1	920.1	920.1	920.1	920.1	918.6	916.7	915.7	917.8	921.9
180°	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9	3562.9
2.5°	3438.2	3428.0	3441.5	3404.4	3441.5	3428.0	3438.2	3461.8	3441.5	3455.0	3468.5
5°	3016.8	3000.0	2946.1	2902.2	2946.1	3000.0	3016.8	3087.6	3121.3	3182.0	3262.9
7.5°	2696.6	2683.1	2669.6	2642.7	2669.6	2683.1	2696.6	2716.8	2750.6	2804.4	2865.1
10°	2625.9	2629.1	2649.4	2646.1	2649.4	2629.1	2625.9	2619.1	2608.9	2619.1	2656.1
12.5°	2807.8	2838.2	2949.4	2942.7	2949.4	2838.2	2807.8	2673.0	2582.0	2565.1	2571.9
15°	3016.8	3026.9	3050.5	3053.9	3050.5	3026.9	3016.8	2962.9	2689.9	2571.9	2534.8
17.5°	3037.0	3040.4	3057.2	3057.2	3057.2	3040.4	3037.0	3013.4	2922.5	2764.0	2555.0
20°	3020.2	3026.9	3060.6	3067.4	3060.6	3026.9	3020.2	2989.9	2939.3	2882.0	2723.6
22.5°	3013.4	3026.9	3053.9	3050.5	3053.9	3026.9	3013.4	2966.3	2922.5	2882.0	2818.0
25°	2979.7	2979.7	2983.1	2986.5	2983.1	2979.7	2979.7	2942.7	2855.0	2844.9	2807.8
27.5°	2908.9	2915.7	2935.9	2932.5	2935.9	2915.7	2908.9	2895.5	2801.1	2791.0	2764.0
30°	2844.9	2838.2	2821.3	2807.8	2821.3	2838.2	2844.9	2824.7	2730.3	2703.3	2710.1
32.5°	2737.0	2720.2	2703.3	2693.2	2703.3	2720.2	2737.0	2730.3	2659.5	2622.5	2629.1
35°	2608.9	2612.3	2608.9	2598.9	2608.9	2612.3	2608.9	2615.7	2571.9	2538.2	2534.8
37.5°	2518.0	2524.7	2521.3	2507.8	2521.3	2524.7	2518.0	2511.2	2450.6	2440.4	2447.2
40°	2423.6	2427.0	2423.6	2413.4	2423.6	2427.0	2423.6	2410.1	2325.9	2329.1	2352.8
42.5°	2332.5	2329.1	2319.1	2312.3	2319.1	2329.1	2332.5	2312.3	2204.4	2194.4	2238.2
45°	2228.1	2231.4	2211.2	2201.1	2211.2	2231.4	2228.1	2214.6	2103.4	2076.4	2106.7
47.5°	2123.6	2123.6	2106.7	2096.6	2106.7	2123.6	2123.6	2106.7	1988.7	1961.7	1978.7
50°	2012.3	2008.9	1985.3	1982.0	1985.3	2008.9	2012.3	2002.3	1877.5	1854.0	1854.0
52.5°	1884.2	1884.2	1887.6	1894.4	1887.6	1884.2	1884.2	1887.6	1776.4	1752.8	1746.1
55°	1773.0	1776.4	1800.0	1806.7	1800.0	1776.4	1773.0	1773.0	1671.9	1648.3	1634.8
57.5°	1658.4	1658.4	1675.3	1675.3	1675.3	1658.4	1658.4	1651.7	1554.0	1533.6	1527.0
60°	1527.0	1533.6	1547.2	1543.8	1547.2	1533.6	1527.0	1520.2	1435.9	1422.5	1398.9
62.5°	1388.7	1395.5	1398.9	1392.1	1398.9	1395.5	1388.7	1368.5	1318.0	1307.8	1277.5
65°	1243.8	1250.6	1254.0	1247.2	1254.0	1250.6	1243.8	1233.6	1196.6	1179.8	1152.8
67.5°	1095.5	1092.1	1088.7	1102.3	1088.7	1092.1	1095.5	1082.1	1058.4	1044.9	1007.9
70°	943.8	943.8	940.4	947.2	940.4	943.8	943.8	933.7	920.2	910.1	876.4
72.5°	782.1	778.7	792.1	782.1	792.1	778.7	782.1	778.7	771.9	761.7	728.1
75°	623.6	630.4	623.6	633.7	623.6	630.4	623.6	627.0	623.6	616.8	593.2
77.5°	475.3	482.1	475.3	475.3	475.3	482.1	475.3	478.7	478.7	478.7	458.5
80°	337.0	333.7	333.7	330.4	333.7	333.7	337.0	337.0	340.4	333.7	327.0
82.5°	215.7	212.3	212.3	219.1	212.3	212.3	215.7	219.1	212.3	212.3	212.3
85°	117.9	121.3	114.6	114.6	114.6	121.3	117.9	111.3	117.9	117.9	114.6
87.5°	43.8	40.4	40.4	40.4	40.4	40.4	43.8	47.2	47.2	47.2	50.6
90°	23.5	23.5	23.5	23.5	23.5	23.5	23.5	31.3	41.7	46.9	40.3
92.5°	117.3	112.6	94.0	75.3	94.0	112.6	117.3	166.3	231.7	264.3	232.1
95°	398.3	384.2	327.7	271.1	327.7	384.2	398.3	523.0	689.3	772.5	652.4
97.5°	919.5	892.6	784.9	677.4	784.9	892.6	919.5	998.3	1103.4	1156.0	955.8
100°	1291.2	1259.1	1131.1	1002.9	1131.1	1259.1	1291.2	1285.4	1277.8	1273.9	1051.8
102.5°	1608.6	1581.2	1471.4	1361.6	1471.4	1581.2	1608.6	1508.1	1374.2	1307.2	1082.0
105°	1979.1	1964.3	1905.2	1846.3	1905.2	1964.3	1979.1	1753.9	1453.7	1303.6	1085.3
107.5°	2171.8	2175.4	2189.6	2203.8	2189.6	2175.4	2171.8	1857.6	1438.8	1229.5	1037.0
110°	2221.2	2236.5	2298.1	2359.5	2298.1	2236.5	2221.2	1870.0	1401.8	1167.7	994.2

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	2189.7	2213.3	2307.6	2402.1	2307.6	2213.3	2189.7	1830.3	1351.2	1111.5	956.9
115°	2082.8	2115.6	2246.5	2377.4	2246.5	2115.6	2082.8	1736.6	1275.0	1044.2	913.9
117.5°	1935.2	1971.5	2116.7	2261.9	2116.7	1971.5	1935.2	1622.8	1206.2	997.9	887.1
120°	1835.8	1871.1	2012.2	2153.3	2012.2	1871.1	1835.8	1550.4	1169.7	979.4	878.1
122.5°	1736.4	1771.2	1910.3	2049.5	1910.3	1771.2	1736.4	1479.4	1136.5	965.1	873.3
125°	1604.9	1636.9	1765.1	1893.3	1765.1	1636.9	1604.9	1386.4	1095.3	949.7	869.4
127.5°	1499.3	1526.3	1634.4	1742.6	1634.4	1526.3	1499.3	1311.7	1061.7	936.7	867.2
130°	1432.6	1457.6	1557.4	1657.3	1557.4	1457.6	1432.6	1265.7	1043.1	931.9	868.6
132.5°	1375.8	1398.2	1487.6	1577.1	1487.6	1398.2	1375.8	1226.4	1027.1	927.5	869.4
135°	1295.5	1314.8	1391.9	1469.0	1391.9	1314.8	1295.5	1170.4	1003.6	920.1	868.6
137.5°	1236.2	1252.0	1315.1	1378.3	1315.1	1252.0	1236.2	1130.5	989.3	918.8	874.0
140°	1188.7	1203.5	1262.5	1321.5	1262.5	1203.5	1188.7	1097.3	975.5	914.5	874.9
142.5°	1155.4	1168.0	1218.8	1269.6	1218.8	1168.0	1155.4	1075.1	968.0	914.5	878.1
145°	1105.4	1114.9	1153.4	1191.8	1153.4	1114.9	1105.4	1039.7	952.2	908.4	878.1
147.5°	1063.3	1071.3	1103.1	1134.9	1103.1	1071.3	1063.3	1011.6	942.8	908.4	884.0
150°	1039.2	1045.7	1071.5	1097.3	1071.5	1045.7	1039.2	995.6	937.4	908.4	887.2
152.5°	1020.1	1025.0	1044.4	1063.9	1044.4	1025.0	1020.1	982.9	933.2	908.4	889.2
155°	997.3	1000.5	1013.4	1026.3	1013.4	1000.5	997.3	967.6	928.1	908.4	893.8
157.5°	977.5	979.8	988.8	997.9	988.8	979.8	977.5	954.5	923.7	908.4	898.3
160°	967.6	968.9	974.2	979.4	974.2	968.9	967.6	947.9	921.5	908.4	900.4
162.5°	958.4	959.5	964.5	969.5	964.5	959.5	958.4	941.7	919.5	908.4	902.6
165°	944.2	945.5	950.7	955.9	950.7	945.5	944.2	932.3	916.3	908.4	905.8
167.5°	938.0	938.5	940.7	942.9	940.7	938.5	938.0	930.2	919.7	914.5	912.3
170°	938.0	938.0	938.0	938.0	938.0	938.0	938.0	930.2	919.7	914.5	914.4
172.5°	933.1	932.6	930.7	928.8	930.7	932.6	933.1	926.9	918.6	914.5	914.5
175°	926.3	926.3	926.3	926.3	926.3	926.3	926.3	922.4	917.1	914.5	915.7
177.5°	925.0	924.5	922.3	920.1	922.3	924.5	925.0	921.9	917.8	915.7	916.7
180°	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1	920.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	3562.9	3562.9	3562.9	3562.9	3562.9
2.5°	3519.1	3535.9	3546.1	3559.5	3593.2
5°	3384.2	3448.3	3468.5	3519.1	3579.7
7.5°	3087.6	3283.1	3337.0	3458.4	3552.7
10°	2801.1	2996.6	3091.0	3377.4	3519.1
12.5°	2656.1	2770.8	2834.8	3235.9	3471.9
15°	2565.1	2646.1	2693.2	3047.2	3418.0
17.5°	2494.4	2551.7	2585.3	2861.8	3343.8
20°	2450.6	2477.5	2507.8	2726.9	3259.5
22.5°	2420.2	2403.3	2427.0	2632.5	3144.9
25°	2400.0	2335.9	2362.9	2558.4	3010.1
27.5°	2416.8	2275.3	2285.3	2491.0	2868.5
30°	2420.2	2201.1	2204.4	2420.2	2710.1
32.5°	2396.6	2123.6	2127.0	2332.5	2531.4
35°	2339.3	2032.5	2029.2	2231.4	2288.7
37.5°	2261.7	1934.8	1934.8	2120.2	2022.5
40°	2167.4	1837.0	1847.2	1975.3	1786.5
42.5°	2052.8	1732.5	1746.1	1783.1	1611.2
45°	1928.1	1631.4	1641.5	1506.7	1476.4
47.5°	1789.9	1527.0	1530.4	1250.6	1432.5
50°	1624.7	1419.1	1405.6	1071.9	1429.2
52.5°	1479.8	1301.1	1260.6	970.8	1297.7
55°	1338.2	1176.4	1088.7	893.2	1203.4
57.5°	1213.4	1014.6	930.4	802.3	1183.1
60°	1098.9	856.2	792.1	704.5	1085.3
62.5°	1004.5	738.2	724.7	637.0	984.2
65°	903.4	657.3	653.9	579.8	835.9
67.5°	805.6	603.4	600.0	525.8	637.0
70°	701.1	546.1	539.3	468.5	471.9
72.5°	593.2	482.1	475.3	421.3	391.0
75°	485.4	407.9	404.5	367.4	316.8
77.5°	380.9	323.6	330.4	296.6	232.6
80°	273.0	236.0	242.7	212.3	175.3
82.5°	182.1	155.1	161.8	134.9	117.9
85°	101.1	87.6	91.0	70.8	53.9
87.5°	47.2	40.4	40.4	27.0	16.8
90°	27.2	17.3	16.1	11.2	6.2
92.5°	167.6	119.2	108.8	66.7	24.7
95°	412.2	232.2	212.9	136.2	59.3
97.5°	555.4	255.1	238.1	170.3	102.5
100°	607.5	274.2	258.9	197.3	135.9
102.5°	631.3	293.3	279.0	221.6	164.2
105°	649.0	321.7	309.6	261.1	212.4
107.5°	652.3	363.7	352.4	307.2	261.8
110°	647.3	387.1	376.9	336.1	295.2

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	647.5	415.5	405.8	366.8	327.9
115°	653.5	458.2	449.2	413.2	377.3
117.5°	665.7	499.6	491.4	458.8	426.1
120°	675.5	523.6	515.9	485.2	454.5
122.5°	689.7	552.1	544.3	513.3	482.3
125°	708.9	588.4	581.4	553.2	524.9
127.5°	728.1	623.7	616.5	588.0	559.5
130°	742.0	647.1	639.4	608.7	578.0
132.5°	753.4	666.3	658.7	627.9	597.1
135°	765.7	688.5	681.6	653.5	625.5
137.5°	784.3	716.9	709.9	682.3	654.6
140°	795.5	736.0	729.7	704.2	678.7
142.5°	805.1	750.3	744.4	720.8	697.2
145°	817.4	771.9	766.7	746.2	725.6
147.5°	835.5	799.1	794.1	774.0	754.0
150°	844.9	813.2	808.8	790.6	772.5
152.5°	851.1	822.5	819.1	805.4	791.6
155°	864.7	842.9	840.3	830.2	820.0
157.5°	878.3	863.2	860.7	850.9	841.0
160°	884.4	872.5	870.6	862.9	855.3
162.5°	891.1	882.5	881.0	875.2	869.4
165°	900.5	896.6	895.3	890.0	884.8
167.5°	908.0	904.7	904.1	901.6	899.1
170°	914.1	913.9	913.3	910.8	908.4
172.5°	914.5	914.5	914.4	913.8	913.3
175°	918.2	920.1	920.1	920.1	920.1
177.5°	918.6	920.1	920.1	920.1	920.1
180°	920.1	920.1	920.1	920.1	920.1

TEST NUMBER: P934992

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-2700K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.49	16.46	16.35	17.34	18.45	18.33	19.30	19.19	20.18	21.29
	3H	15.98	16.84	16.85	17.73	18.87	19.69	20.55	20.56	21.44	22.58
	4H	16.17	16.99	17.06	17.89	19.03	20.14	20.96	21.02	21.85	23.00
	6H	16.30	17.05	17.20	17.96	19.11	20.43	21.18	21.33	22.09	23.25
	8H	16.30	17.02	17.21	17.94	19.10	20.51	21.23	21.42	22.15	23.31
	12H	16.28	16.96	17.19	17.88	19.06	20.55	21.24	21.46	22.15	23.33
4H	2H	16.54	17.36	17.43	18.26	19.40	18.75	19.57	19.64	20.47	21.61
	3H	17.58	18.26	18.48	19.19	20.35	20.27	20.95	21.17	21.88	23.04
	4H	17.86	18.48	18.77	19.40	20.59	20.80	21.43	21.72	22.35	23.54
	6H	17.99	18.53	18.92	19.47	20.66	21.18	21.71	22.11	22.66	23.85
	8H	18.00	18.50	18.93	19.44	20.64	21.29	21.79	22.22	22.73	23.93
	12H	17.97	18.42	18.92	19.38	20.59	21.35	21.80	22.30	22.76	23.97
8H	4H	18.32	18.82	19.25	19.76	20.96	20.94	21.44	21.87	22.38	23.58
	6H	18.59	19.00	19.54	19.99	21.18	21.38	21.79	22.34	22.78	23.98
	8H	18.63	19.00	19.60	19.97	21.19	21.53	21.90	22.50	22.87	24.09
	12H	18.62	18.94	19.59	19.91	21.17	21.64	21.96	22.61	22.93	24.19
12H	4H	18.33	18.78	19.28	19.74	20.95	20.91	21.36	21.86	22.32	23.52
	6H	18.65	19.02	19.62	19.99	21.21	21.38	21.75	22.34	22.72	23.94
	8H	18.72	19.04	19.69	20.01	21.28	21.55	21.87	22.52	22.83	24.10

END OF REPORT