

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P935282

Luminaire Tested: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P935282
REPORT IS A COMBINATION OF REPORTS P933746 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7610.4 lumens
Efficiency: N/A
Efficacy: 131.2 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 58
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

Luminous Intensity Polar Plot

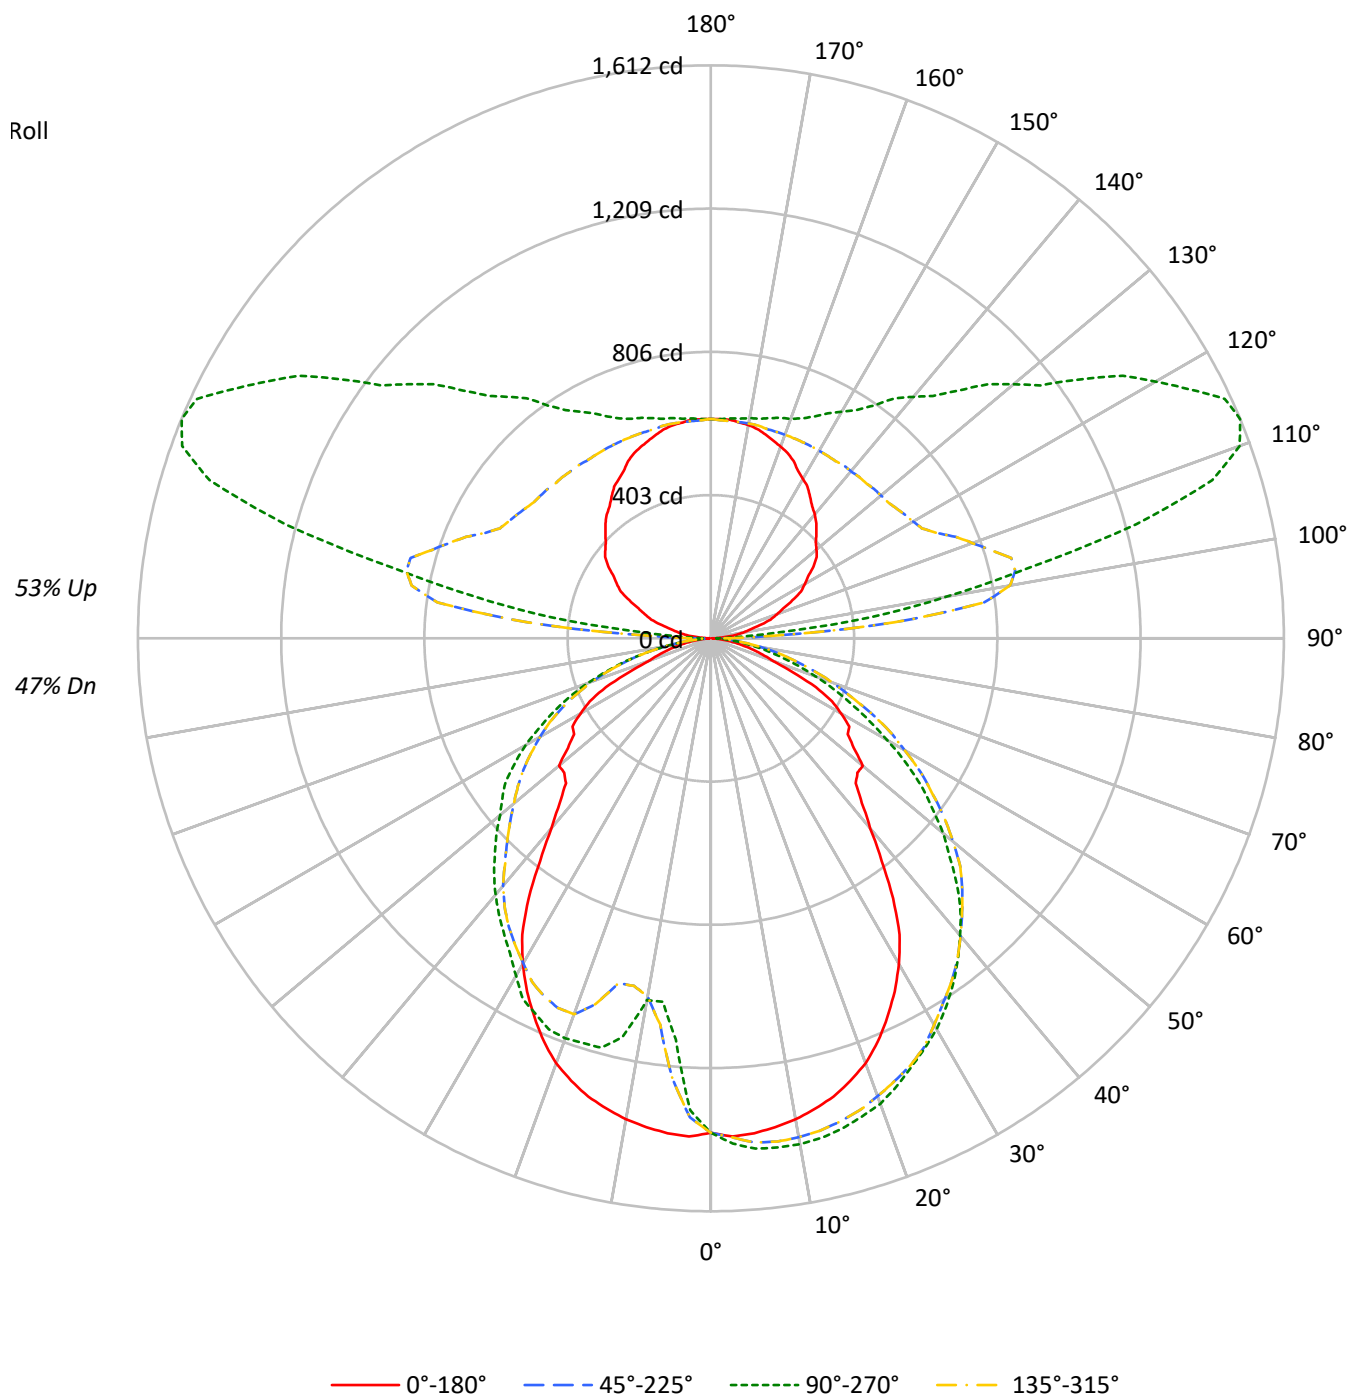

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40	40	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	34	34	34
3	81	71	64	58	74	66	60	54	56	51	47	46	43	40	37	35	33	28	28	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	21	19	19	19
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16
8	53	41	33	28	49	38	31	27	33	27	23	28	23	20	23	19	17	15	15	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12906	12906	12906	12906
5°	12990	13029	12990	10244
10°	12889	12834	12889	9176
15°	12733	12556	12733	10484
20°	12452	12227	12452	10506
25°	11894	11747	11894	10284
30°	11176	11348	11176	9795
35°	9947	10843	9947	9258
40°	8275	10249	8275	8852
45°	7380	9554	7380	8385
50°	7822	8725	7822	7917
55°	7338	7832	7338	7646
60°	7537	6651	7537	7003
65°	6802	5498	6802	6146
70°	4679	4382	4679	5152
75°	4056	3239	4056	3879
80°	3201	2141	3201	2332
85°	1739	1133	1739	963

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 11331 cd/sqm

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.6	1.6
10°-20°	356.5	4.7
20°-30°	551.1	7.2
30°-40°	657.9	8.6
40°-50°	661.7	8.7
50°-60°	575.8	7.6
60°-70°	408.2	5.4
70°-80°	216.0	2.8
80°-90°	56.1	0.7
90°-100°	300.9	4.0
100°-110°	791.1	10.4
110°-120°	820.2	10.8
120°-130°	657.9	8.6
130°-140°	516.2	6.8
140°-150°	396.2	5.2
150°-160°	285.4	3.7
160°-170°	174.6	2.3
170°-180°	59.0	0.8
0°-30°	1033.1	13.6
0°-40°	1691.0	22.2
0°-60°	2928.5	38.5
0°-90°	3608.9	47.4
90°-120°	1912.2	25.1
90°-150°	3482.6	45.8
90°-180°	4002.0	52.6
0°-180°	7610.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1391	1391	1391	1391	1391	
5°	1398	1441	1398	1133	1398	133
15°	1334	1428	1334	1192	1334	375
25°	1175	1332	1175	1166	1175	540
35°	894	1188	894	1015	894	553
45°	576	979	576	859	576	462
55°	470	722	470	705	470	432
65°	326	436	326	487	326	312
75°	124	207	124	247	124	130
85°	21	53	21	45	21	28
90°	4	16	4	16	4	4
95°	40	182	40	182	40	44
105°	142	1239	142	1239	142	151
115°	253	1595	253	1595	253	250
125°	352	1270	352	1270	352	313
135°	420	986	420	986	420	325
145°	487	800	487	800	487	305
155°	550	688	550	688	550	253
165°	594	641	594	641	594	168
175°	617	621	617	621	617	59
180°	617	617	617	617	617	

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9
2.5°	1402.8	1402.8	1410.7	1413.3	1413.3	1409.3	1405.5	1409.3	1421.2	1425.2	1423.9
5°	1397.6	1408.0	1422.6	1425.2	1427.8	1426.5	1423.9	1426.5	1439.6	1442.3	1443.6
7.5°	1387.0	1406.8	1425.2	1429.2	1433.0	1429.2	1427.8	1430.5	1443.6	1446.2	1446.2
10°	1373.9	1401.5	1422.6	1425.2	1429.2	1425.2	1425.2	1430.5	1443.6	1446.2	1447.6
12.5°	1355.5	1393.6	1413.3	1416.0	1421.2	1419.9	1418.6	1423.9	1437.0	1439.6	1439.6
15°	1334.3	1379.2	1397.6	1400.2	1409.3	1406.8	1406.8	1412.0	1426.5	1430.5	1429.2
17.5°	1305.5	1360.7	1381.8	1385.7	1392.3	1390.9	1392.3	1397.6	1410.7	1413.3	1414.6
20°	1272.5	1335.7	1360.7	1364.6	1371.2	1371.2	1371.2	1377.8	1390.9	1396.2	1396.2
22.5°	1227.8	1309.3	1335.7	1338.3	1346.2	1346.2	1348.9	1358.0	1369.9	1371.2	1371.2
25°	1175.2	1280.5	1302.8	1310.7	1318.6	1322.5	1326.5	1331.8	1335.7	1334.3	1335.7
27.5°	1119.9	1243.6	1272.5	1277.8	1288.3	1292.3	1297.5	1298.9	1300.2	1304.1	1301.5
30°	1058.1	1192.2	1235.6	1240.9	1258.0	1260.6	1255.5	1258.0	1264.6	1267.3	1269.9
32.5°	988.2	1115.9	1197.5	1209.3	1225.2	1217.2	1215.9	1219.9	1230.5	1230.5	1233.0
35°	893.5	1056.8	1162.0	1172.5	1184.3	1175.2	1180.4	1181.8	1188.3	1192.2	1190.9
37.5°	789.5	1005.4	1125.2	1133.0	1142.2	1130.4	1138.3	1142.2	1147.5	1144.9	1144.9
40°	697.5	925.1	1081.8	1086.9	1094.9	1085.6	1093.5	1096.2	1098.8	1096.2	1094.9
42.5°	629.1	836.9	1035.6	1042.2	1036.9	1043.5	1046.2	1051.5	1047.5	1042.2	1042.2
45°	576.4	813.2	985.6	993.5	985.6	996.2	1000.1	1000.1	988.2	985.6	984.3
47.5°	559.3	765.9	935.6	935.6	931.7	944.8	951.5	942.2	930.4	926.5	926.5
50°	558.0	713.2	867.2	861.9	880.4	896.2	889.6	880.4	871.2	856.7	856.7
52.5°	506.7	648.8	779.1	798.8	827.8	836.9	826.4	817.2	801.4	794.8	789.5
55°	469.8	581.7	698.8	738.2	768.5	780.4	760.6	751.4	727.7	723.8	721.1
57.5°	461.9	484.3	625.1	675.1	711.9	710.6	698.8	681.7	661.9	658.0	656.7
60°	423.7	350.0	546.1	605.4	643.5	639.5	629.1	613.2	594.8	592.2	589.5
62.5°	384.3	254.0	456.7	523.8	577.7	576.4	567.2	543.5	530.4	523.8	518.5
65°	326.4	213.1	325.0	435.6	513.2	515.8	496.1	479.0	464.5	456.7	455.3
67.5°	248.7	173.7	219.7	363.2	451.4	448.7	423.7	415.8	397.4	393.4	385.6
70°	184.3	115.8	152.7	294.8	390.8	384.3	364.5	355.3	338.2	329.0	323.7
72.5°	152.7	93.4	111.9	229.0	329.0	321.1	304.0	293.4	279.0	271.1	265.8
75°	123.7	98.7	85.6	169.7	267.1	261.8	246.1	235.6	223.7	213.1	214.5
77.5°	90.8	92.1	68.4	125.0	211.8	204.0	194.7	181.6	176.3	165.8	165.8
80°	68.4	72.4	51.3	85.6	152.7	152.7	144.7	135.6	126.3	121.1	121.1
82.5°	46.0	46.0	38.1	54.0	104.0	100.0	94.7	92.1	86.9	84.3	84.3
85°	21.0	26.3	23.7	32.9	56.6	59.3	59.3	56.6	55.3	52.6	54.0
87.5°	6.6	11.9	14.4	18.4	29.0	30.3	31.6	31.6	31.6	32.9	32.9
90°	4.2	7.5	10.8	11.6	18.2	27.1	31.5	28.0	21.0	15.7	15.7
92.5°	16.5	44.7	72.9	80.0	112.4	155.7	177.3	155.4	111.6	78.7	75.6
95°	39.7	91.3	142.9	155.8	276.6	437.6	518.2	462.4	350.9	267.2	257.8
97.5°	68.7	114.2	159.8	171.1	372.6	641.2	775.5	740.2	669.7	616.8	598.8
100°	91.1	132.4	173.6	184.0	407.6	705.7	854.7	857.3	862.3	866.2	844.7
102.5°	110.2	148.7	187.1	196.8	423.6	725.9	877.1	922.0	1011.8	1079.2	1060.7
105°	142.5	175.1	207.7	215.8	435.5	728.2	874.6	975.3	1176.7	1327.8	1317.9
107.5°	175.7	206.1	236.5	244.0	437.6	695.7	824.8	965.3	1246.3	1457.0	1459.4
110°	198.0	225.5	252.9	259.8	434.3	667.0	783.4	940.4	1254.6	1490.1	1500.5

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	220.0	246.1	272.2	278.8	434.5	641.9	745.7	906.5	1227.9	1469.0	1484.8
115°	253.1	277.2	301.3	307.4	438.4	613.2	700.6	855.5	1165.1	1397.4	1419.3
117.5°	285.9	307.8	329.7	335.2	446.6	595.2	669.5	809.2	1088.7	1298.4	1322.7
120°	304.9	325.5	346.1	351.3	453.2	589.1	657.1	784.7	1040.1	1231.7	1255.4
122.5°	323.6	344.4	365.2	370.4	462.7	585.9	647.5	762.4	992.4	1164.9	1188.2
125°	352.2	371.1	390.0	394.8	475.6	583.3	637.1	734.8	930.2	1076.7	1098.2
127.5°	375.3	394.4	413.6	418.4	488.4	581.8	628.5	712.3	880.1	1005.9	1024.0
130°	387.7	408.4	429.0	434.2	497.8	582.8	625.2	699.9	849.2	961.1	977.9
132.5°	400.6	421.2	441.8	447.0	505.4	583.3	622.2	689.0	822.7	923.0	938.0
135°	419.7	438.4	457.3	461.9	513.7	582.8	617.3	673.3	785.1	869.1	882.1
137.5°	439.1	457.8	476.3	481.0	526.1	586.3	616.4	663.7	758.4	829.4	839.9
140°	455.3	472.4	489.5	493.8	533.8	586.9	613.5	654.4	736.1	797.5	807.4
142.5°	467.7	483.6	499.4	503.4	540.1	589.0	613.5	649.4	721.2	775.1	783.7
145°	486.7	500.6	514.3	517.8	548.4	589.1	609.5	638.8	697.5	741.5	748.0
147.5°	505.9	519.3	532.7	536.0	560.5	593.1	609.5	632.6	678.8	713.4	718.8
150°	518.2	530.4	542.5	545.6	566.9	595.3	609.5	629.0	667.9	697.2	701.5
152.5°	531.1	540.2	549.5	551.8	571.0	596.6	609.5	626.1	659.4	684.4	687.6
155°	550.2	557.0	563.8	565.5	580.2	599.7	609.5	622.7	649.2	669.0	671.2
157.5°	564.2	570.9	577.5	579.2	589.2	602.7	609.5	619.7	640.3	655.8	657.3
160°	573.8	579.0	584.1	585.3	593.4	604.1	609.5	618.3	635.9	649.2	650.1
162.5°	583.3	587.1	591.0	592.0	597.8	605.6	609.5	616.9	631.8	642.9	643.7
165°	593.6	597.1	600.6	601.5	604.2	607.7	609.5	614.8	625.5	633.5	634.4
167.5°	603.2	604.9	606.6	607.0	609.2	612.0	613.5	617.0	624.0	629.3	629.7
170°	609.5	611.0	612.7	613.1	613.2	613.4	613.5	617.0	624.0	629.3	629.3
172.5°	612.7	613.1	613.4	613.5	613.5	613.5	613.5	616.3	621.8	626.0	625.7
175°	617.3	617.3	617.3	617.3	616.0	614.3	613.5	615.3	618.8	621.4	621.4
177.5°	617.3	617.3	617.3	617.3	616.3	615.0	614.3	615.7	618.5	620.6	620.2
180°	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9
2.5°	1426.5	1422.6	1426.5	1423.9	1425.2	1421.2	1409.3	1405.5	1409.3	1413.3	1413.3
5°	1443.6	1441.0	1443.6	1443.6	1442.3	1439.6	1426.5	1423.9	1426.5	1427.8	1425.2
7.5°	1448.9	1444.9	1448.9	1446.2	1446.2	1443.6	1430.5	1427.8	1429.2	1433.0	1429.2
10°	1448.9	1444.9	1448.9	1447.6	1446.2	1443.6	1430.5	1425.2	1425.2	1429.2	1425.2
12.5°	1442.3	1439.6	1442.3	1439.6	1439.6	1437.0	1423.9	1418.6	1419.9	1421.2	1416.0
15°	1431.8	1427.8	1431.8	1429.2	1430.5	1426.5	1412.0	1406.8	1406.8	1409.3	1400.2
17.5°	1416.0	1410.7	1416.0	1414.6	1413.3	1410.7	1397.6	1392.3	1390.9	1392.3	1385.7
20°	1397.6	1393.6	1397.6	1396.2	1396.2	1390.9	1377.8	1371.2	1371.2	1371.2	1364.6
22.5°	1368.6	1364.6	1368.6	1371.2	1371.2	1369.9	1358.0	1348.9	1346.2	1346.2	1338.3
25°	1335.7	1331.8	1335.7	1335.7	1334.3	1335.7	1331.8	1326.5	1322.5	1318.6	1310.7
27.5°	1304.1	1301.5	1304.1	1301.5	1304.1	1300.2	1298.9	1297.5	1292.3	1288.3	1277.8
30°	1272.5	1269.9	1272.5	1269.9	1267.3	1264.6	1258.0	1255.5	1260.6	1258.0	1240.9
32.5°	1233.0	1230.5	1233.0	1233.0	1230.5	1230.5	1219.9	1215.9	1217.2	1225.2	1209.3
35°	1192.2	1188.3	1192.2	1190.9	1192.2	1188.3	1181.8	1180.4	1175.2	1184.3	1172.5
37.5°	1144.9	1140.9	1144.9	1144.9	1144.9	1147.5	1142.2	1138.3	1130.4	1142.2	1133.0
40°	1096.2	1090.9	1096.2	1094.9	1096.2	1098.8	1096.2	1093.5	1085.6	1094.9	1086.9
42.5°	1040.9	1039.6	1040.9	1042.2	1042.2	1047.5	1051.5	1046.2	1043.5	1036.9	1042.2
45°	981.7	979.1	981.7	984.3	985.6	988.2	1000.1	1000.1	996.2	985.6	993.5
47.5°	918.5	911.9	918.5	926.5	926.5	930.4	942.2	951.5	944.8	931.7	935.6
50°	851.4	852.8	851.4	856.7	856.7	871.2	880.4	889.6	896.2	880.4	861.9
52.5°	785.6	784.4	785.6	789.5	794.8	801.4	817.2	826.4	836.9	827.8	798.8
55°	719.8	722.5	719.8	721.1	723.8	727.7	751.4	760.6	780.4	768.5	738.2
57.5°	654.1	650.1	654.1	656.7	658.0	661.9	681.7	698.8	710.6	711.9	675.1
60°	577.7	572.4	577.7	589.5	592.2	594.8	613.2	629.1	639.5	643.5	605.4
62.5°	510.5	501.4	510.5	518.5	523.8	530.4	543.5	567.2	576.4	577.7	523.8
65°	439.5	435.6	439.5	455.3	456.7	464.5	479.0	496.1	515.8	513.2	435.6
67.5°	375.1	375.1	375.1	385.6	393.4	397.4	415.8	423.7	448.7	451.4	363.2
70°	315.8	314.5	315.8	323.7	329.0	338.2	355.3	364.5	384.3	390.8	294.8
72.5°	259.3	258.0	259.3	265.8	271.1	279.0	293.4	304.0	321.1	329.0	229.0
75°	209.3	206.6	209.3	214.5	213.1	223.7	235.6	246.1	261.8	267.1	169.7
77.5°	160.6	160.6	160.6	165.8	165.8	176.3	181.6	194.7	204.0	211.8	125.0
80°	119.7	118.4	119.7	121.1	121.1	126.3	135.6	144.7	152.7	152.7	85.6
82.5°	84.3	81.6	84.3	84.3	84.3	86.9	92.1	94.7	100.0	104.0	54.0
85°	52.6	52.6	52.6	54.0	52.6	55.3	56.6	59.3	59.3	56.6	32.9
87.5°	34.3	32.9	34.3	32.9	32.9	31.6	31.6	31.6	30.3	29.0	18.4
90°	15.7	15.7	15.7	15.7	15.7	21.0	28.0	31.5	27.1	18.2	11.6
92.5°	63.0	50.5	63.0	75.6	78.7	111.6	155.4	177.3	155.7	112.4	80.0
95°	219.8	181.9	219.8	257.8	267.2	350.9	462.4	518.2	437.6	276.6	155.8
97.5°	526.6	454.5	526.6	598.8	616.8	669.7	740.2	775.5	641.2	372.6	171.1
100°	758.8	672.8	758.8	844.7	866.2	862.3	857.3	854.7	705.7	407.6	184.0
102.5°	987.1	913.5	987.1	1060.7	1079.2	1011.8	922.0	877.1	725.9	423.6	196.8
105°	1278.3	1238.7	1278.3	1317.9	1327.8	1176.7	975.3	874.6	728.2	435.5	215.8
107.5°	1469.0	1478.6	1469.0	1459.4	1457.0	1246.3	965.3	824.8	695.7	437.6	244.0
110°	1541.7	1582.9	1541.7	1500.5	1490.1	1254.6	940.4	783.4	667.0	434.3	259.8



TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1548.2	1611.5	1548.2	1484.8	1469.0	1227.9	906.5	745.7	641.9	434.5	278.8
115°	1507.1	1595.0	1507.1	1419.3	1397.4	1165.1	855.5	700.6	613.2	438.4	307.4
117.5°	1420.1	1517.5	1420.1	1322.7	1298.4	1088.7	809.2	669.5	595.2	446.6	335.2
120°	1350.0	1444.6	1350.0	1255.4	1231.7	1040.1	784.7	657.1	589.1	453.2	351.3
122.5°	1281.7	1375.0	1281.7	1188.2	1164.9	992.4	762.4	647.5	585.9	462.7	370.4
125°	1184.1	1270.2	1184.1	1098.2	1076.7	930.2	734.8	637.1	583.3	475.6	394.8
127.5°	1096.6	1169.1	1096.6	1024.0	1005.9	880.1	712.3	628.5	581.8	488.4	418.4
130°	1044.9	1111.9	1044.9	977.9	961.1	849.2	699.9	625.2	582.8	497.8	434.2
132.5°	998.0	1058.1	998.0	938.0	923.0	822.7	689.0	622.2	583.3	505.4	447.0
135°	933.8	985.5	933.8	882.1	869.1	785.1	673.3	617.3	582.8	513.7	461.9
137.5°	882.4	924.7	882.4	839.9	829.4	758.4	663.7	616.4	586.3	526.1	481.0
140°	847.0	886.5	847.0	807.4	797.5	736.1	654.4	613.5	586.9	533.8	493.8
142.5°	817.7	851.8	817.7	783.7	775.1	721.2	649.4	613.5	589.0	540.1	503.4
145°	773.8	799.6	773.8	748.0	741.5	697.5	638.8	609.5	589.1	548.4	517.8
147.5°	740.1	761.4	740.1	718.8	713.4	678.8	632.6	609.5	593.1	560.5	536.0
150°	718.8	736.1	718.8	701.5	697.2	667.9	629.0	609.5	595.3	566.9	545.6
152.5°	700.7	713.8	700.7	687.6	684.4	659.4	626.1	609.5	596.6	571.0	551.8
155°	679.9	688.5	679.9	671.2	669.0	649.2	622.7	609.5	599.7	580.2	565.5
157.5°	663.4	669.5	663.4	657.3	655.8	640.3	619.7	609.5	602.7	589.2	579.2
160°	653.6	657.1	653.6	650.1	649.2	635.9	618.3	609.5	604.1	593.4	585.3
162.5°	647.1	650.4	647.1	643.7	642.9	631.8	616.9	609.5	605.6	597.8	592.0
165°	637.8	641.3	637.8	634.4	633.5	625.5	614.8	609.5	607.7	604.2	601.5
167.5°	631.1	632.6	631.1	629.7	629.3	624.0	617.0	613.5	612.0	609.2	607.0
170°	629.3	629.3	629.3	629.3	629.3	624.0	617.0	613.5	613.4	613.2	613.1
172.5°	624.4	623.1	624.4	625.7	626.0	621.8	616.3	613.5	613.5	613.5	613.5
175°	621.4	621.4	621.4	621.4	621.4	618.8	615.3	613.5	614.3	616.0	617.3
177.5°	618.8	617.3	618.8	620.2	620.6	618.5	615.7	614.3	615.0	616.3	617.3
180°	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9
2.5°	1410.7	1402.8	1402.8	1389.6	1384.3	1380.5	1373.9	1354.2	1348.9	1343.6	1351.5
5°	1422.6	1408.0	1397.6	1373.9	1354.2	1346.2	1321.2	1273.9	1242.2	1218.6	1205.5
7.5°	1425.2	1406.8	1387.0	1350.2	1302.8	1281.8	1205.5	1118.6	1094.9	1073.8	1060.6
10°	1422.6	1401.5	1373.9	1318.6	1206.8	1169.9	1093.5	1036.9	1022.5	1018.5	1022.5
12.5°	1413.3	1393.6	1355.5	1263.3	1106.8	1081.8	1036.9	1004.1	1001.5	1008.1	1043.5
15°	1397.6	1379.2	1334.3	1189.6	1051.5	1033.1	1001.5	989.6	1004.1	1050.1	1156.8
17.5°	1381.8	1360.7	1305.5	1117.2	1009.3	996.2	973.8	997.5	1079.1	1140.9	1176.5
20°	1360.7	1335.7	1272.5	1064.6	979.1	967.2	956.7	1063.3	1125.2	1147.5	1167.2
22.5°	1335.7	1309.3	1227.8	1027.8	947.5	938.2	944.8	1100.2	1125.2	1140.9	1158.0
25°	1302.8	1280.5	1175.2	998.8	922.5	911.9	936.9	1096.2	1110.6	1114.6	1148.8
27.5°	1272.5	1243.6	1119.9	972.5	892.2	888.2	943.5	1079.1	1089.6	1093.5	1130.4
30°	1235.6	1192.2	1058.1	944.8	860.6	859.3	944.8	1058.1	1055.4	1065.9	1102.8
32.5°	1197.5	1115.9	988.2	910.6	830.4	829.1	935.6	1026.5	1023.8	1038.3	1065.9
35°	1162.0	1056.8	893.5	871.2	792.2	793.5	913.2	989.6	990.9	1004.1	1021.2
37.5°	1125.2	1005.4	789.5	827.8	755.4	755.4	883.0	955.4	952.8	956.7	980.4
40°	1081.8	925.1	697.5	771.1	721.1	717.2	846.2	918.5	909.3	908.1	940.9
42.5°	1035.6	836.9	629.1	696.1	681.7	676.4	801.4	873.8	856.7	860.6	902.8
45°	985.6	813.2	576.4	588.2	640.8	636.9	752.7	822.5	810.6	821.2	864.6
47.5°	935.6	765.9	559.3	488.2	597.4	596.1	698.8	772.5	765.9	776.4	822.5
50°	867.2	713.2	558.0	418.5	548.8	554.0	634.3	723.8	723.8	733.0	781.7
52.5°	779.1	648.8	506.7	379.0	492.1	508.0	577.7	681.7	684.3	693.5	736.9
55°	698.8	581.7	469.8	348.7	425.1	459.3	522.4	638.2	643.5	652.7	692.2
57.5°	625.1	484.3	461.9	313.2	363.2	396.1	473.7	596.1	598.8	606.7	644.8
60°	546.1	350.0	423.7	275.0	309.3	334.3	429.0	546.1	555.4	560.5	593.5
62.5°	456.7	254.0	384.3	248.7	283.0	288.2	392.1	498.7	510.5	514.5	534.3
65°	325.0	213.1	326.4	226.4	255.3	256.6	352.7	450.1	460.6	467.1	481.7
67.5°	219.7	173.7	248.7	205.3	234.3	235.6	314.5	393.4	408.0	413.2	422.4
70°	152.7	115.8	184.3	183.0	210.6	213.1	273.7	342.1	355.3	359.3	364.5
72.5°	111.9	93.4	152.7	164.5	185.6	188.1	231.6	284.3	297.4	301.4	304.0
75°	85.6	98.7	123.7	143.4	157.9	159.3	189.5	231.6	240.8	243.4	244.7
77.5°	68.4	92.1	90.8	115.8	129.0	126.3	148.7	179.0	186.8	186.8	186.8
80°	51.3	72.4	68.4	82.9	94.7	92.1	106.6	127.7	130.3	132.9	131.6
82.5°	38.1	46.0	46.0	52.6	63.1	60.6	71.0	82.9	82.9	82.9	85.6
85°	23.7	26.3	21.0	27.6	35.6	34.3	39.4	44.7	46.0	46.0	43.4
87.5°	14.4	11.9	6.6	10.6	15.8	15.8	18.4	19.7	18.4	18.4	18.4
90°	10.8	7.5	4.2	7.5	10.8	11.6	18.2	27.1	31.5	28.0	21.0
92.5°	72.9	44.7	16.5	44.7	72.9	80.0	112.4	155.7	177.3	155.4	111.6
95°	142.9	91.3	39.7	91.3	142.9	155.8	276.6	437.6	518.2	462.4	350.9
97.5°	159.8	114.2	68.7	114.2	159.8	171.1	372.6	641.2	775.5	740.2	669.7
100°	173.6	132.4	91.1	132.4	173.6	184.0	407.6	705.7	854.7	857.3	862.3
102.5°	187.1	148.7	110.2	148.7	187.1	196.8	423.6	725.9	877.1	922.0	1011.8
105°	207.7	175.1	142.5	175.1	207.7	215.8	435.5	728.2	874.6	975.3	1176.7
107.5°	236.5	206.1	175.7	206.1	236.5	244.0	437.6	695.7	824.8	965.3	1246.3
110°	252.9	225.5	198.0	225.5	252.9	259.8	434.3	667.0	783.4	940.4	1254.6

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	272.2	246.1	220.0	246.1	272.2	278.8	434.5	641.9	745.7	906.5	1227.9
115°	301.3	277.2	253.1	277.2	301.3	307.4	438.4	613.2	700.6	855.5	1165.1
117.5°	329.7	307.8	285.9	307.8	329.7	335.2	446.6	595.2	669.5	809.2	1088.7
120°	346.1	325.5	304.9	325.5	346.1	351.3	453.2	589.1	657.1	784.7	1040.1
122.5°	365.2	344.4	323.6	344.4	365.2	370.4	462.7	585.9	647.5	762.4	992.4
125°	390.0	371.1	352.2	371.1	390.0	394.8	475.6	583.3	637.1	734.8	930.2
127.5°	413.6	394.4	375.3	394.4	413.6	418.4	488.4	581.8	628.5	712.3	880.1
130°	429.0	408.4	387.7	408.4	429.0	434.2	497.8	582.8	625.2	699.9	849.2
132.5°	441.8	421.2	400.6	421.2	441.8	447.0	505.4	583.3	622.2	689.0	822.7
135°	457.3	438.4	419.7	438.4	457.3	461.9	513.7	582.8	617.3	673.3	785.1
137.5°	476.3	457.8	439.1	457.8	476.3	481.0	526.1	586.3	616.4	663.7	758.4
140°	489.5	472.4	455.3	472.4	489.5	493.8	533.8	586.9	613.5	654.4	736.1
142.5°	499.4	483.6	467.7	483.6	499.4	503.4	540.1	589.0	613.5	649.4	721.2
145°	514.3	500.6	486.7	500.6	514.3	517.8	548.4	589.1	609.5	638.8	697.5
147.5°	532.7	519.3	505.9	519.3	532.7	536.0	560.5	593.1	609.5	632.6	678.8
150°	542.5	530.4	518.2	530.4	542.5	545.6	566.9	595.3	609.5	629.0	667.9
152.5°	549.5	540.2	531.1	540.2	549.5	551.8	571.0	596.6	609.5	626.1	659.4
155°	563.8	557.0	550.2	557.0	563.8	565.5	580.2	599.7	609.5	622.7	649.2
157.5°	577.5	570.9	564.2	570.9	577.5	579.2	589.2	602.7	609.5	619.7	640.3
160°	584.1	579.0	573.8	579.0	584.1	585.3	593.4	604.1	609.5	618.3	635.9
162.5°	591.0	587.1	583.3	587.1	591.0	592.0	597.8	605.6	609.5	616.9	631.8
165°	600.6	597.1	593.6	597.1	600.6	601.5	604.2	607.7	609.5	614.8	625.5
167.5°	606.6	604.9	603.2	604.9	606.6	607.0	609.2	612.0	613.5	617.0	624.0
170°	612.7	611.0	609.5	611.0	612.7	613.1	613.2	613.4	613.5	617.0	624.0
172.5°	613.4	613.1	612.7	613.1	613.4	613.5	613.5	613.5	613.5	616.3	621.8
175°	617.3	617.3	617.3	617.3	617.3	617.3	616.0	614.3	613.5	615.3	618.8
177.5°	617.3	617.3	617.3	617.3	617.3	617.3	616.3	615.0	614.3	615.7	618.5
180°	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9	1390.9
2.5°	1342.3	1338.3	1343.6	1329.1	1343.6	1338.3	1342.3	1351.5	1343.6	1348.9	1354.2
5°	1177.8	1171.2	1150.2	1133.0	1150.2	1171.2	1177.8	1205.5	1218.6	1242.2	1273.9
7.5°	1052.8	1047.5	1042.2	1031.7	1042.2	1047.5	1052.8	1060.6	1073.8	1094.9	1118.6
10°	1025.1	1026.5	1034.3	1033.1	1034.3	1026.5	1025.1	1022.5	1018.5	1022.5	1036.9
12.5°	1096.2	1108.0	1151.5	1148.8	1151.5	1108.0	1096.2	1043.5	1008.1	1001.5	1004.1
15°	1177.8	1181.8	1190.9	1192.2	1190.9	1181.8	1177.8	1156.8	1050.1	1004.1	989.6
17.5°	1185.6	1187.0	1193.6	1193.6	1193.6	1187.0	1185.6	1176.5	1140.9	1079.1	997.5
20°	1179.1	1181.8	1194.9	1197.5	1194.9	1181.8	1179.1	1167.2	1147.5	1125.2	1063.3
22.5°	1176.5	1181.8	1192.2	1190.9	1192.2	1181.8	1176.5	1158.0	1140.9	1125.2	1100.2
25°	1163.3	1163.3	1164.6	1165.9	1164.6	1163.3	1163.3	1148.8	1114.6	1110.6	1096.2
27.5°	1135.6	1138.3	1146.2	1144.9	1146.2	1138.3	1135.6	1130.4	1093.5	1089.6	1079.1
30°	1110.6	1108.0	1101.5	1096.2	1101.5	1108.0	1110.6	1102.8	1065.9	1055.4	1058.1
32.5°	1068.5	1061.9	1055.4	1051.5	1055.4	1061.9	1068.5	1065.9	1038.3	1023.8	1026.5
35°	1018.5	1019.9	1018.5	1014.6	1018.5	1019.9	1018.5	1021.2	1004.1	990.9	989.6
37.5°	983.1	985.6	984.3	979.1	984.3	985.6	983.1	980.4	956.7	952.8	955.4
40°	946.2	947.5	946.2	942.2	946.2	947.5	946.2	940.9	908.1	909.3	918.5
42.5°	910.6	909.3	905.4	902.8	905.4	909.3	910.6	902.8	860.6	856.7	873.8
45°	869.8	871.2	863.2	859.3	863.2	871.2	869.8	864.6	821.2	810.6	822.5
47.5°	829.1	829.1	822.5	818.5	822.5	829.1	829.1	822.5	776.4	765.9	772.5
50°	785.6	784.4	775.1	773.8	775.1	784.4	785.6	781.7	733.0	723.8	723.8
52.5°	735.6	735.6	736.9	739.5	736.9	735.6	735.6	736.9	693.5	684.3	681.7
55°	692.2	693.5	702.7	705.4	702.7	693.5	692.2	692.2	652.7	643.5	638.2
57.5°	647.4	647.4	654.1	654.1	654.1	647.4	647.4	644.8	606.7	598.8	596.1
60°	596.1	598.8	604.0	602.7	604.0	598.8	596.1	593.5	560.5	555.4	546.1
62.5°	542.1	544.8	546.1	543.5	546.1	544.8	542.1	534.3	514.5	510.5	498.7
65°	485.6	488.2	489.5	486.9	489.5	488.2	485.6	481.7	467.1	460.6	450.1
67.5°	427.7	426.4	425.1	430.3	425.1	426.4	427.7	422.4	413.2	408.0	393.4
70°	368.4	368.4	367.1	369.8	367.1	368.4	368.4	364.5	359.3	355.3	342.1
72.5°	305.3	304.0	309.3	305.3	309.3	304.0	305.3	304.0	301.4	297.4	284.3
75°	243.4	246.1	243.4	247.4	243.4	246.1	243.4	244.7	243.4	240.8	231.6
77.5°	185.6	188.1	185.6	185.6	185.6	188.1	185.6	186.8	186.8	186.8	179.0
80°	131.6	130.3	130.3	129.0	130.3	130.3	131.6	131.6	132.9	130.3	127.7
82.5°	84.3	82.9	82.9	85.6	82.9	82.9	84.3	85.6	82.9	82.9	82.9
85°	46.0	47.4	44.7	44.7	44.7	47.4	46.0	43.4	46.0	46.0	44.7
87.5°	17.1	15.8	15.8	15.8	15.8	15.8	17.1	18.4	18.4	18.4	19.7
90°	15.7	15.7	15.7	15.7	15.7	15.7	15.7	21.0	28.0	31.5	27.1
92.5°	78.7	75.6	63.0	50.5	63.0	75.6	78.7	111.6	155.4	177.3	155.7
95°	267.2	257.8	219.8	181.9	219.8	257.8	267.2	350.9	462.4	518.2	437.6
97.5°	616.8	598.8	526.6	454.5	526.6	598.8	616.8	669.7	740.2	775.5	641.2
100°	866.2	844.7	758.8	672.8	758.8	844.7	866.2	862.3	857.3	854.7	705.7
102.5°	1079.2	1060.7	987.1	913.5	987.1	1060.7	1079.2	1011.8	922.0	877.1	725.9
105°	1327.8	1317.9	1278.3	1238.7	1278.3	1317.9	1327.8	1176.7	975.3	874.6	728.2
107.5°	1457.0	1459.4	1469.0	1478.6	1469.0	1459.4	1457.0	1246.3	965.3	824.8	695.7
110°	1490.1	1500.5	1541.7	1582.9	1541.7	1500.5	1490.1	1254.6	940.4	783.4	667.0

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1469.0	1484.8	1548.2	1611.5	1548.2	1484.8	1469.0	1227.9	906.5	745.7	641.9
115°	1397.4	1419.3	1507.1	1595.0	1507.1	1419.3	1397.4	1165.1	855.5	700.6	613.2
117.5°	1298.4	1322.7	1420.1	1517.5	1420.1	1322.7	1298.4	1088.7	809.2	669.5	595.2
120°	1231.7	1255.4	1350.0	1444.6	1350.0	1255.4	1231.7	1040.1	784.7	657.1	589.1
122.5°	1164.9	1188.2	1281.7	1375.0	1281.7	1188.2	1164.9	992.4	762.4	647.5	585.9
125°	1076.7	1098.2	1184.1	1270.2	1184.1	1098.2	1076.7	930.2	734.8	637.1	583.3
127.5°	1005.9	1024.0	1096.6	1169.1	1096.6	1024.0	1005.9	880.1	712.3	628.5	581.8
130°	961.1	977.9	1044.9	1111.9	1044.9	977.9	961.1	849.2	699.9	625.2	582.8
132.5°	923.0	938.0	998.0	1058.1	998.0	938.0	923.0	822.7	689.0	622.2	583.3
135°	869.1	882.1	933.8	985.5	933.8	882.1	869.1	785.1	673.3	617.3	582.8
137.5°	829.4	839.9	882.4	924.7	882.4	839.9	829.4	758.4	663.7	616.4	586.3
140°	797.5	807.4	847.0	886.5	847.0	807.4	797.5	736.1	654.4	613.5	586.9
142.5°	775.1	783.7	817.7	851.8	817.7	783.7	775.1	721.2	649.4	613.5	589.0
145°	741.5	748.0	773.8	799.6	773.8	748.0	741.5	697.5	638.8	609.5	589.1
147.5°	713.4	718.8	740.1	761.4	740.1	718.8	713.4	678.8	632.6	609.5	593.1
150°	697.2	701.5	718.8	736.1	718.8	701.5	697.2	667.9	629.0	609.5	595.3
152.5°	684.4	687.6	700.7	713.8	700.7	687.6	684.4	659.4	626.1	609.5	596.6
155°	669.0	671.2	679.9	688.5	679.9	671.2	669.0	649.2	622.7	609.5	599.7
157.5°	655.8	657.3	663.4	669.5	663.4	657.3	655.8	640.3	619.7	609.5	602.7
160°	649.2	650.1	653.6	657.1	653.6	650.1	649.2	635.9	618.3	609.5	604.1
162.5°	642.9	643.7	647.1	650.4	647.1	643.7	642.9	631.8	616.9	609.5	605.6
165°	633.5	634.4	637.8	641.3	637.8	634.4	633.5	625.5	614.8	609.5	607.7
167.5°	629.3	629.7	631.1	632.6	631.1	629.7	629.3	624.0	617.0	613.5	612.0
170°	629.3	629.3	629.3	629.3	629.3	629.3	629.3	624.0	617.0	613.5	613.4
172.5°	626.0	625.7	624.4	623.1	624.4	625.7	626.0	621.8	616.3	613.5	613.5
175°	621.4	621.4	621.4	621.4	621.4	621.4	621.4	618.8	615.3	613.5	614.3
177.5°	620.6	620.2	618.8	617.3	618.8	620.2	620.6	618.5	615.7	614.3	615.0
180°	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3	617.3

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	1390.9	1390.9	1390.9	1390.9	1390.9
2.5°	1373.9	1380.5	1384.3	1389.6	1402.8
5°	1321.2	1346.2	1354.2	1373.9	1397.6
7.5°	1205.5	1281.8	1302.8	1350.2	1387.0
10°	1093.5	1169.9	1206.8	1318.6	1373.9
12.5°	1036.9	1081.8	1106.8	1263.3	1355.5
15°	1001.5	1033.1	1051.5	1189.6	1334.3
17.5°	973.8	996.2	1009.3	1117.2	1305.5
20°	956.7	967.2	979.1	1064.6	1272.5
22.5°	944.8	938.2	947.5	1027.8	1227.8
25°	936.9	911.9	922.5	998.8	1175.2
27.5°	943.5	888.2	892.2	972.5	1119.9
30°	944.8	859.3	860.6	944.8	1058.1
32.5°	935.6	829.1	830.4	910.6	988.2
35°	913.2	793.5	792.2	871.2	893.5
37.5°	883.0	755.4	755.4	827.8	789.5
40°	846.2	717.2	721.1	771.1	697.5
42.5°	801.4	676.4	681.7	696.1	629.1
45°	752.7	636.9	640.8	588.2	576.4
47.5°	698.8	596.1	597.4	488.2	559.3
50°	634.3	554.0	548.8	418.5	558.0
52.5°	577.7	508.0	492.1	379.0	506.7
55°	522.4	459.3	425.1	348.7	469.8
57.5°	473.7	396.1	363.2	313.2	461.9
60°	429.0	334.3	309.3	275.0	423.7
62.5°	392.1	288.2	283.0	248.7	384.3
65°	352.7	256.6	255.3	226.4	326.4
67.5°	314.5	235.6	234.3	205.3	248.7
70°	273.7	213.1	210.6	183.0	184.3
72.5°	231.6	188.1	185.6	164.5	152.7
75°	189.5	159.3	157.9	143.4	123.7
77.5°	148.7	126.3	129.0	115.8	90.8
80°	106.6	92.1	94.7	82.9	68.4
82.5°	71.0	60.6	63.1	52.6	46.0
85°	39.4	34.3	35.6	27.6	21.0
87.5°	18.4	15.8	15.8	10.6	6.6
90°	18.2	11.6	10.8	7.5	4.2
92.5°	112.4	80.0	72.9	44.7	16.5
95°	276.6	155.8	142.9	91.3	39.7
97.5°	372.6	171.1	159.8	114.2	68.7
100°	407.6	184.0	173.6	132.4	91.1
102.5°	423.6	196.8	187.1	148.7	110.2
105°	435.5	215.8	207.7	175.1	142.5
107.5°	437.6	244.0	236.5	206.1	175.7
110°	434.3	259.8	252.9	225.5	198.0



TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	434.5	278.8	272.2	246.1	220.0
115°	438.4	307.4	301.3	277.2	253.1
117.5°	446.6	335.2	329.7	307.8	285.9
120°	453.2	351.3	346.1	325.5	304.9
122.5°	462.7	370.4	365.2	344.4	323.6
125°	475.6	394.8	390.0	371.1	352.2
127.5°	488.4	418.4	413.6	394.4	375.3
130°	497.8	434.2	429.0	408.4	387.7
132.5°	505.4	447.0	441.8	421.2	400.6
135°	513.7	461.9	457.3	438.4	419.7
137.5°	526.1	481.0	476.3	457.8	439.1
140°	533.8	493.8	489.5	472.4	455.3
142.5°	540.1	503.4	499.4	483.6	467.7
145°	548.4	517.8	514.3	500.6	486.7
147.5°	560.5	536.0	532.7	519.3	505.9
150°	566.9	545.6	542.5	530.4	518.2
152.5°	571.0	551.8	549.5	540.2	531.1
155°	580.2	565.5	563.8	557.0	550.2
157.5°	589.2	579.2	577.5	570.9	564.2
160°	593.4	585.3	584.1	579.0	573.8
162.5°	597.8	592.0	591.0	587.1	583.3
165°	604.2	601.5	600.6	597.1	593.6
167.5°	609.2	607.0	606.6	604.9	603.2
170°	613.2	613.1	612.7	611.0	609.5
172.5°	613.5	613.5	613.4	613.1	612.7
175°	616.0	617.3	617.3	617.3	617.3
177.5°	616.3	617.3	617.3	617.3	617.3
180°	617.3	617.3	617.3	617.3	617.3

TEST NUMBER: P935282

CATALOG NUMBER: SQ4-FA-100U-100D-B2750-1D-UNV-W2A-W-4-2700K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.44	14.28	14.42	15.27	16.57	16.23	17.07	17.21	18.07	19.37
	3H	13.91	14.66	14.90	15.66	16.99	17.57	18.32	18.56	19.32	20.65
	4H	14.10	14.81	15.11	15.82	17.16	18.00	18.72	19.01	19.72	21.06
	6H	14.22	14.88	15.23	15.88	17.23	18.28	18.94	19.29	19.95	21.30
	8H	14.22	14.84	15.24	15.87	17.22	18.35	18.97	19.37	20.00	21.35
	12H	14.19	14.78	15.22	15.80	17.17	18.38	18.98	19.41	20.00	21.37
4H	2H	14.46	15.17	15.47	16.17	17.51	16.64	17.35	17.65	18.36	19.70
	3H	15.48	16.08	16.50	17.11	18.46	18.14	18.73	19.15	19.76	21.11
	4H	15.76	16.30	16.78	17.33	18.70	18.66	19.20	19.68	20.22	21.60
	6H	15.88	16.35	16.92	17.40	18.77	19.01	19.48	20.05	20.53	21.90
	8H	15.89	16.32	16.93	17.37	18.75	19.11	19.55	20.15	20.59	21.98
	12H	15.85	16.25	16.91	17.30	18.69	19.16	19.56	20.22	20.62	22.01
8H	4H	16.21	16.64	17.24	17.68	19.07	18.78	19.22	19.82	20.26	21.64
	6H	16.47	16.83	17.53	17.91	19.29	19.21	19.57	20.27	20.65	22.03
	8H	16.51	16.82	17.58	17.89	19.29	19.35	19.67	20.42	20.74	22.14
	12H	16.49	16.77	17.56	17.83	19.28	19.45	19.72	20.52	20.79	22.23
12H	4H	16.21	16.60	17.27	17.66	19.05	18.74	19.14	19.80	20.19	21.58
	6H	16.52	16.84	17.59	17.91	19.31	19.20	19.52	20.27	20.59	21.99
	8H	16.59	16.87	17.66	17.93	19.38	19.36	19.64	20.43	20.70	22.15

END OF REPORT