

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937277

Luminaire Tested: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937277
REPORT IS A COMBINATION OF REPORTS P933495 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18449.9 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 153.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

Luminous Intensity Polar Plot

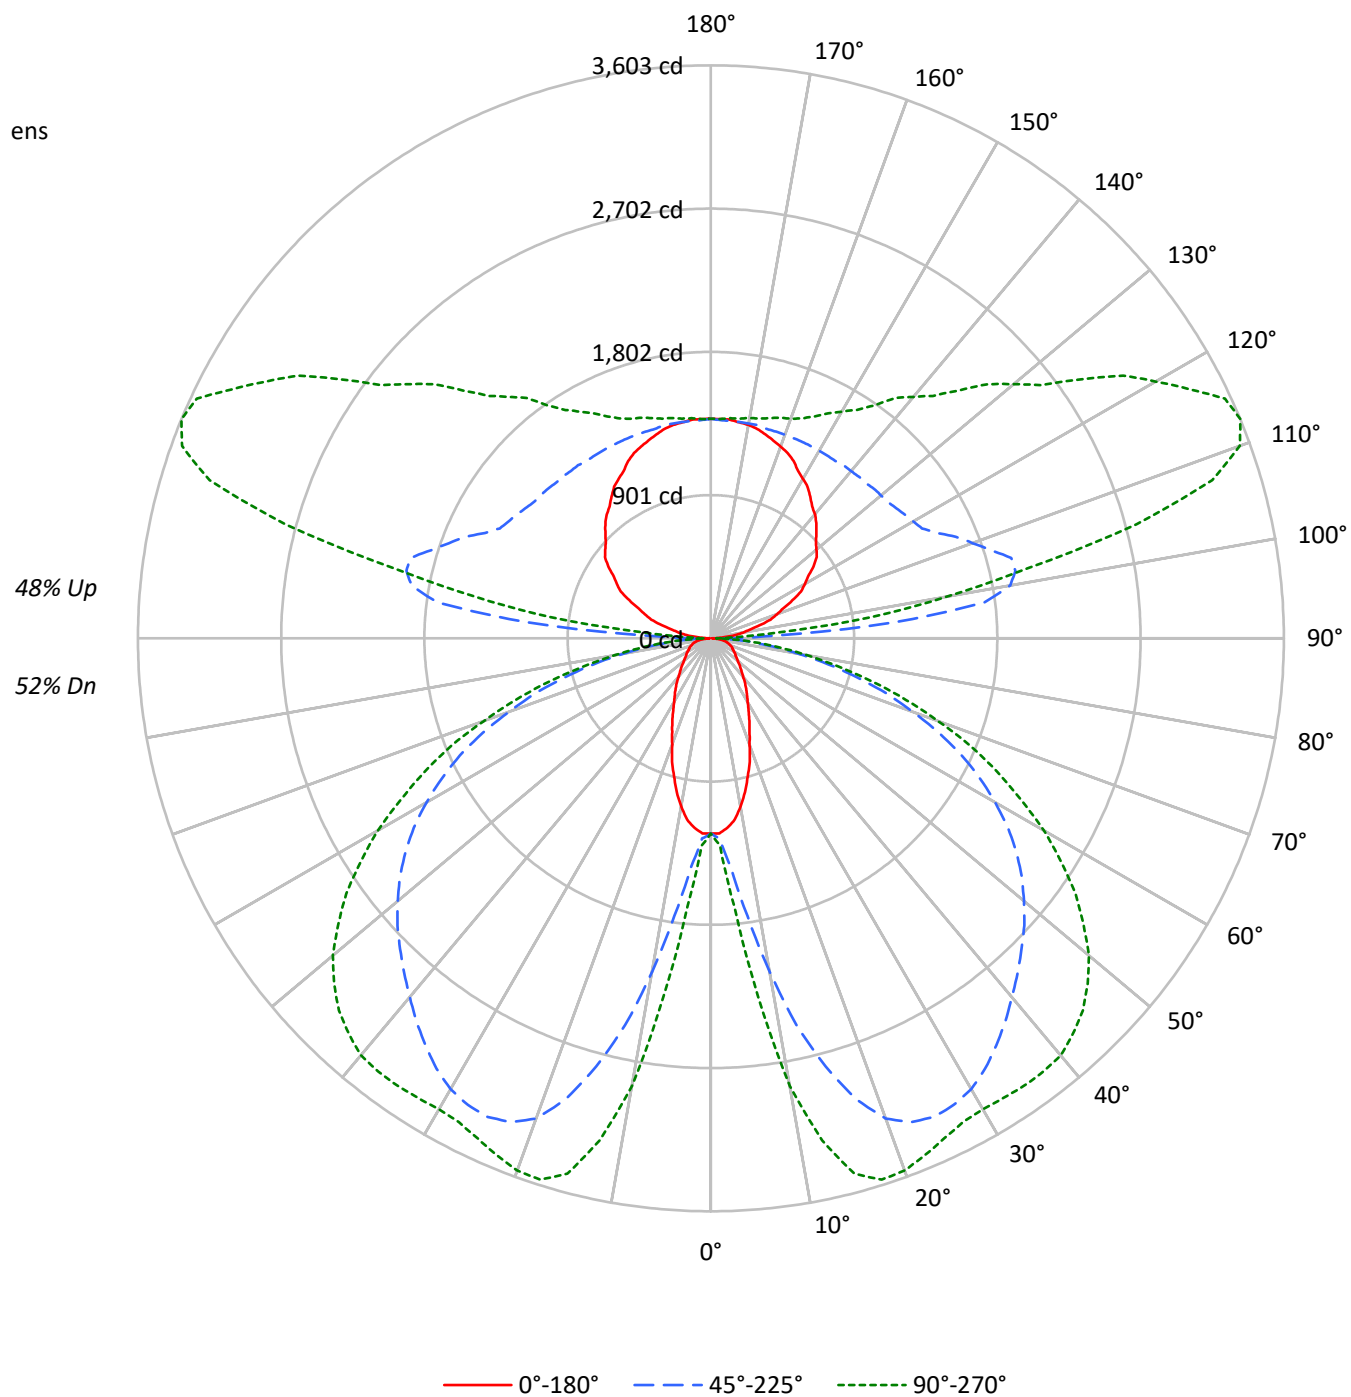

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	108	108	108	108	99	99	99	99	84	84	84		70	70	70		58
1	98	93	89	85	90	86	82	79	73	70	68		61	59	57		50
2	88	80	74	69	81	74	69	64	63	59	55		53	50	47		43
3	80	70	62	56	74	65	58	53	55	50	46		46	42	39		38
4	73	62	53	47	67	57	50	44	49	43	38		41	36	33		33
5	67	55	46	40	61	51	43	37	43	37	33		36	32	28		30
6	61	49	40	34	56	45	38	32	39	33	28		32	28	24		27
7	56	44	35	30	52	41	33	28	35	29	24		29	25	21		24
8	52	39	31	26	48	37	29	24	31	26	21		27	22	19		22
9	49	36	28	23	45	33	26	22	29	23	19		24	20	16		20
10	45	33	25	20	42	31	24	19	26	21	17		22	18	15		19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3798	3798	3798
5°	3711	4390	5104
10°	3368	6401	8462
15°	2863	8365	10218
20°	2332	9696	10414
25°	1946	10149	10202
30°	1641	10216	10183
35°	1452	10049	10446
40°	1266	9831	10719
45°	1147	9672	10760
50°	1053	9530	10582
55°	1010	9321	10113
60°	1035	8916	9373
65°	1079	8298	8355
70°	1152	7242	7058
75°	1282	5910	5508
80°	1410	4104	3711
85°	1277	2180	1900

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10760 cd/sqm

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.8	0.9
10°-20°	703.9	3.8
20°-30°	1231.2	6.7
30°-40°	1584.9	8.6
40°-50°	1770.3	9.6
50°-60°	1695.5	9.2
60°-70°	1343.7	7.3
70°-80°	790.1	4.3
80°-90°	224.8	1.2
90°-100°	672.7	3.6
100°-110°	1768.7	9.6
110°-120°	1833.9	9.9
120°-130°	1471.0	8.0
130°-140°	1154.2	6.3
140°-150°	885.9	4.8
150°-160°	638.0	3.5
160°-170°	390.4	2.1
170°-180°	131.9	0.7
0°-30°	2093.9	11.3
0°-40°	3678.8	19.9
0°-60°	7144.5	38.7
0°-90°	9503.1	51.5
90°-120°	4275.3	23.2
90°-150°	7786.5	42.2
90°-180°	8947.0	48.5
0°-180°	18449.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1228	1228	1228	1228	1228	
5°	1196	1283	1445	1634	1694	110
15°	896	1654	2787	3379	3486	249
25°	572	1875	3320	3466	3470	264
35°	387	1792	3127	3304	3434	242
45°	264	1429	2763	3166	3308	205
55°	190	908	2345	2724	2799	173
65°	150	482	1741	1958	1986	149
75°	111	296	955	1050	1054	116
85°	39	91	237	261	264	42
90°	9	26	70	35	35	10
95°	89	348	1159	597	407	99
105°	319	483	1955	2969	2770	338
115°	566	687	1566	3124	3566	559
125°	787	883	1425	2407	2840	699
135°	938	1033	1380	1943	2204	726
145°	1088	1158	1362	1658	1788	682
155°	1230	1264	1362	1496	1539	565
165°	1327	1345	1362	1416	1434	375
175°	1380	1380	1372	1389	1389	131
180°	1380	1380	1380	1380	1380	

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8	1227.8
2.5°	1227.8	1227.8	1235.6	1239.6	1247.5	1251.5	1259.3	1267.2	1290.9	1294.9	1302.8
5°	1196.2	1211.9	1263.3	1283.0	1338.3	1413.3	1444.9	1496.2	1602.8	1634.3	1654.1
7.5°	1148.8	1184.3	1310.6	1342.2	1480.4	1677.8	1760.7	1871.2	2041.0	2123.9	2191.0
10°	1073.8	1148.8	1373.8	1448.8	1673.9	1973.9	2127.9	2281.8	2538.4	2652.8	2696.3
12.5°	990.9	1113.2	1440.9	1543.6	1867.3	2305.4	2491.0	2660.8	2952.9	3106.9	3130.5
15°	896.1	1061.9	1504.1	1654.1	2072.6	2581.8	2787.1	2996.4	3268.8	3379.2	3406.9
17.5°	813.2	1022.5	1563.3	1721.2	2230.4	2830.5	3039.8	3213.5	3434.5	3509.5	3529.3
20°	710.5	959.3	1602.8	1808.0	2396.3	3012.1	3213.5	3347.7	3497.7	3545.1	3552.9
22.5°	635.5	892.2	1626.5	1839.6	2506.8	3122.7	3292.4	3399.0	3501.6	3517.5	3521.4
25°	572.4	817.2	1622.5	1875.2	2601.6	3189.8	3320.1	3399.0	3458.2	3466.1	3466.1
27.5°	513.2	734.3	1606.7	1883.0	2672.7	3205.5	3308.2	3363.5	3391.1	3406.9	3406.9
30°	461.8	655.4	1567.2	1867.3	2704.2	3189.8	3272.7	3300.3	3327.9	3351.6	3363.5
32.5°	422.4	580.3	1508.0	1835.7	2708.1	3150.3	3209.5	3225.3	3264.8	3320.1	3339.8
35°	386.8	505.3	1440.9	1792.3	2684.4	3087.1	3126.6	3142.4	3221.4	3304.2	3331.9
37.5°	351.4	450.1	1354.1	1717.3	2649.0	3012.1	3039.8	3067.4	3189.8	3288.5	3320.1
40°	315.8	402.7	1251.5	1634.3	2593.7	2921.4	2945.0	2988.4	3150.3	3264.8	3296.4
42.5°	288.1	363.2	1140.9	1547.5	2522.6	2818.7	2854.2	2917.4	3102.9	3225.3	3260.8
45°	264.5	323.7	1022.5	1429.1	2431.8	2712.1	2763.4	2850.3	3047.7	3166.1	3197.7
47.5°	240.8	296.1	900.1	1306.8	2333.1	2605.5	2672.7	2771.3	2972.7	3087.1	3114.8
50°	221.1	268.4	777.7	1176.5	2226.6	2491.0	2570.0	2672.7	2877.9	2984.5	3020.1
52.5°	205.3	244.7	663.2	1046.2	2104.1	2372.6	2463.4	2570.0	2763.4	2866.1	2889.8
55°	189.5	225.0	564.5	908.0	1977.9	2246.3	2345.0	2447.6	2637.1	2724.0	2739.7
57.5°	181.6	209.3	481.7	777.7	1843.6	2104.1	2214.7	2309.4	2487.1	2554.1	2570.0
60°	169.7	197.4	418.4	667.1	1697.5	1969.9	2064.7	2159.4	2309.4	2364.7	2376.6
62.5°	157.9	189.5	371.1	560.5	1547.5	1812.0	1906.7	1993.6	2120.0	2159.4	2175.2
65°	150.0	181.6	335.6	481.7	1393.6	1646.2	1740.9	1816.0	1918.6	1958.0	1966.0
67.5°	142.1	173.7	308.0	414.5	1239.6	1480.4	1551.5	1622.5	1701.5	1740.9	1744.9
70°	130.3	165.8	284.3	367.1	1081.7	1290.9	1350.2	1425.2	1488.3	1508.0	1519.9
72.5°	122.4	154.0	268.4	331.6	919.8	1109.3	1164.6	1208.0	1263.3	1283.0	1283.0
75°	110.6	138.1	252.7	296.1	754.0	908.0	955.4	998.8	1042.2	1050.1	1038.2
77.5°	98.7	122.4	217.1	248.7	588.2	718.5	758.0	781.7	817.2	825.1	829.1
80°	82.9	106.6	169.7	193.4	426.4	529.0	556.7	576.4	608.0	608.0	615.8
82.5°	63.1	82.9	122.4	138.1	288.1	363.2	386.8	398.7	418.4	418.4	418.4
85°	39.4	51.3	79.0	90.8	173.7	221.1	236.8	240.8	256.6	260.6	260.6
87.5°	19.7	27.6	51.3	55.3	90.8	114.4	114.4	122.4	122.4	118.4	114.4
90°	9.3	16.6	24.0	25.9	40.7	60.6	70.4	62.5	46.9	35.2	35.2
92.5°	37.1	100.0	163.0	178.8	251.3	348.0	396.4	347.4	249.5	176.0	169.0
95°	88.9	204.2	319.5	348.3	618.4	978.7	1158.7	1034.0	784.5	597.4	576.2
97.5°	153.8	255.5	357.2	382.6	833.1	1433.6	1733.9	1655.1	1497.4	1379.2	1338.8
100°	203.8	296.0	388.2	411.2	911.1	1577.6	1910.8	1916.6	1928.2	1936.8	1888.7
102.5°	246.4	332.5	418.4	439.9	946.9	1622.9	1960.9	2061.3	2262.2	2412.9	2371.8
105°	318.6	391.5	464.3	482.6	973.5	1628.1	1955.3	2180.5	2630.9	2968.7	2946.6
107.5°	392.7	460.6	528.6	545.6	978.5	1555.7	1844.2	2158.3	2786.5	3257.6	3263.0
110°	442.7	504.1	565.4	580.8	971.0	1491.4	1751.6	2102.8	2805.0	3331.7	3354.7

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	491.8	550.3	608.8	623.4	971.4	1435.3	1667.3	2026.7	2745.5	3284.5	3319.9
115°	565.9	619.8	673.8	687.2	980.3	1371.0	1566.3	1912.5	2604.9	3124.3	3173.4
117.5°	639.1	688.1	737.0	749.3	998.5	1330.7	1496.8	1809.2	2434.1	2902.8	2957.3
120°	681.8	727.9	773.9	785.4	1013.3	1317.1	1469.0	1754.5	2325.5	2753.7	2806.6
122.5°	723.4	769.9	816.4	828.1	1034.6	1310.0	1447.7	1704.8	2219.0	2604.6	2656.8
125°	787.3	829.8	872.2	882.8	1063.3	1304.2	1424.6	1643.0	2079.7	2407.3	2455.4
127.5°	839.2	882.1	924.9	935.5	1092.1	1300.8	1405.2	1592.7	1967.7	2249.0	2289.5
130°	867.0	913.1	959.1	970.7	1113.0	1302.8	1397.7	1564.6	1898.5	2148.9	2186.3
132.5°	895.7	941.8	987.8	999.4	1130.0	1304.2	1391.2	1540.6	1839.5	2063.7	2097.3
135°	938.3	980.3	1022.3	1032.8	1148.6	1303.0	1380.2	1505.3	1755.5	1943.3	1972.2
137.5°	981.9	1023.4	1065.0	1075.4	1176.4	1310.9	1378.3	1484.0	1695.7	1854.4	1878.1
140°	1017.9	1056.2	1094.5	1104.1	1193.3	1312.3	1371.8	1463.2	1646.0	1783.0	1805.2
142.5°	1045.7	1081.2	1116.5	1125.4	1207.6	1317.0	1371.8	1452.1	1612.6	1733.0	1752.1
145°	1088.3	1119.2	1150.1	1157.8	1226.1	1317.0	1362.5	1428.2	1559.5	1658.0	1672.5
147.5°	1131.0	1161.0	1191.1	1198.6	1253.3	1326.1	1362.5	1414.2	1517.5	1595.0	1606.9
150°	1158.7	1185.9	1213.1	1219.9	1267.4	1330.9	1362.5	1406.2	1493.4	1558.8	1568.5
152.5°	1187.4	1208.0	1228.6	1233.7	1276.7	1333.9	1362.5	1399.8	1474.3	1530.2	1537.4
155°	1230.1	1245.3	1260.5	1264.3	1297.1	1340.7	1362.5	1392.2	1451.5	1495.9	1500.8
157.5°	1261.5	1276.4	1291.2	1294.9	1317.4	1347.5	1362.5	1385.5	1431.7	1466.2	1469.6
160°	1282.8	1294.4	1306.0	1308.8	1326.8	1350.6	1362.5	1382.2	1421.8	1451.5	1453.5
162.5°	1304.2	1312.8	1321.4	1323.6	1336.5	1353.9	1362.5	1379.2	1412.5	1437.5	1439.4
165°	1327.4	1335.1	1342.9	1344.9	1350.8	1358.6	1362.5	1374.5	1398.3	1416.2	1418.2
167.5°	1348.6	1352.3	1356.1	1357.0	1361.9	1368.5	1371.8	1379.6	1395.2	1406.9	1407.7
170°	1362.5	1366.2	1370.0	1370.9	1371.2	1371.6	1371.8	1379.6	1395.2	1406.9	1406.9
172.5°	1369.9	1370.7	1371.6	1371.8	1371.8	1371.8	1371.8	1378.0	1390.3	1399.6	1398.9
175°	1380.2	1380.2	1380.2	1380.2	1377.4	1373.7	1371.8	1375.7	1383.5	1389.4	1389.4
177.5°	1380.2	1380.2	1380.2	1380.2	1378.0	1375.1	1373.7	1376.8	1382.9	1387.5	1386.7
180°	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2	1380.2

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1227.8	1227.8
2.5°	1310.6	1302.8
5°	1685.7	1693.6
7.5°	2270.0	2266.0
10°	2822.7	2858.1
12.5°	3225.3	3233.2
15°	3470.1	3485.9
17.5°	3564.8	3568.8
20°	3568.8	3560.9
22.5°	3525.3	3517.5
25°	3474.0	3470.1
27.5°	3426.6	3430.6
30°	3406.9	3418.8
32.5°	3406.9	3426.6
35°	3414.8	3434.5
37.5°	3410.8	3434.5
40°	3395.1	3422.7
42.5°	3351.6	3371.4
45°	3284.5	3308.2
47.5°	3197.7	3213.5
50°	3087.1	3102.9
52.5°	2949.0	2952.9
55°	2783.1	2799.0
57.5°	2605.5	2609.4
60°	2408.1	2420.0
62.5°	2198.9	2198.9
65°	1977.9	1985.7
67.5°	1748.9	1768.6
70°	1515.9	1519.9
72.5°	1286.9	1286.9
75°	1050.1	1054.1
77.5°	825.1	825.1
80°	611.9	615.8
82.5°	422.4	430.3
85°	264.5	264.5
87.5°	122.4	110.6
90°	35.2	35.2
92.5°	141.0	113.0
95°	491.4	406.7
97.5°	1177.5	1016.1
100°	1696.5	1504.3
102.5°	2207.0	2042.4
105°	2858.0	2769.5
107.5°	3284.4	3305.8
110°	3447.0	3539.2

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3461.5	3603.1
115°	3369.7	3566.1
117.5°	3175.0	3392.9
120°	3018.3	3229.8
122.5°	2865.5	3074.3
125°	2647.7	2839.9
127.5°	2451.8	2613.9
130°	2336.2	2486.1
132.5°	2231.4	2365.7
135°	2087.9	2203.6
137.5°	1972.7	2067.4
140°	1893.7	1982.1
142.5°	1828.3	1904.4
145°	1730.1	1787.6
147.5°	1654.7	1702.5
150°	1607.2	1646.0
152.5°	1566.7	1595.9
155°	1520.1	1539.4
157.5°	1483.2	1496.8
160°	1461.2	1469.0
162.5°	1446.8	1454.3
165°	1426.0	1433.8
167.5°	1411.1	1414.4
170°	1406.9	1406.9
172.5°	1396.0	1393.1
175°	1389.4	1389.4
177.5°	1383.4	1380.2
180°	1380.2	1380.2

TEST NUMBER: P937277

CATALOG NUMBER: SQ4-FB-075U-100D-B2750-1D-UNV-W2A-W-12-2700K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.78	6.70	6.72	7.66	8.90	18.98	19.89	19.91	20.85	22.09
	3H	6.49	7.32	7.44	8.28	9.55	20.82	21.65	21.77	22.61	23.88
	4H	6.79	7.57	7.76	8.55	9.82	21.48	22.25	22.44	23.23	24.50
	6H	7.05	7.77	8.02	8.74	10.03	21.91	22.63	22.89	23.61	24.90
	8H	7.12	7.80	8.10	8.80	10.09	22.04	22.72	23.02	23.72	25.01
	12H	7.14	7.79	8.12	8.78	10.09	22.11	22.76	23.10	23.75	25.07
4H	2H	13.01	13.79	13.98	14.76	16.04	19.26	20.03	20.22	21.01	22.28
	3H	14.59	15.24	15.56	16.24	17.53	21.31	21.96	22.29	22.97	24.26
	4H	14.68	15.28	15.67	16.27	17.59	22.08	22.68	23.07	23.68	24.99
	6H	14.70	15.21	15.69	16.23	17.54	22.63	23.15	23.63	24.17	25.48
	8H	14.67	15.16	15.67	16.17	17.50	22.80	23.28	23.80	24.29	25.62
	12H	14.63	15.07	15.65	16.10	17.43	22.90	23.33	23.92	24.36	25.69
8H	4H	16.14	16.62	17.14	17.63	18.96	22.15	22.63	23.15	23.64	24.97
	6H	16.38	16.78	17.41	17.83	19.16	22.79	23.19	23.81	24.24	25.57
	8H	16.40	16.75	17.43	17.79	19.14	23.01	23.36	24.04	24.40	25.75
	12H	16.37	16.68	17.41	17.71	19.10	23.16	23.47	24.20	24.50	25.89
12H	4H	16.28	16.72	17.30	17.75	19.08	22.10	22.54	23.12	23.57	24.90
	6H	16.64	16.99	17.67	18.03	19.38	22.77	23.12	23.80	24.16	25.51
	8H	16.71	17.02	17.75	18.06	19.45	23.00	23.32	24.04	24.35	25.74