

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937878

Luminaire Tested: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937878
REPORT IS A COMBINATION OF REPORTS P933589 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19575.1 lumens
Efficiency: N/A
Efficacy: 137.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 142.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

Luminous Intensity Polar Plot

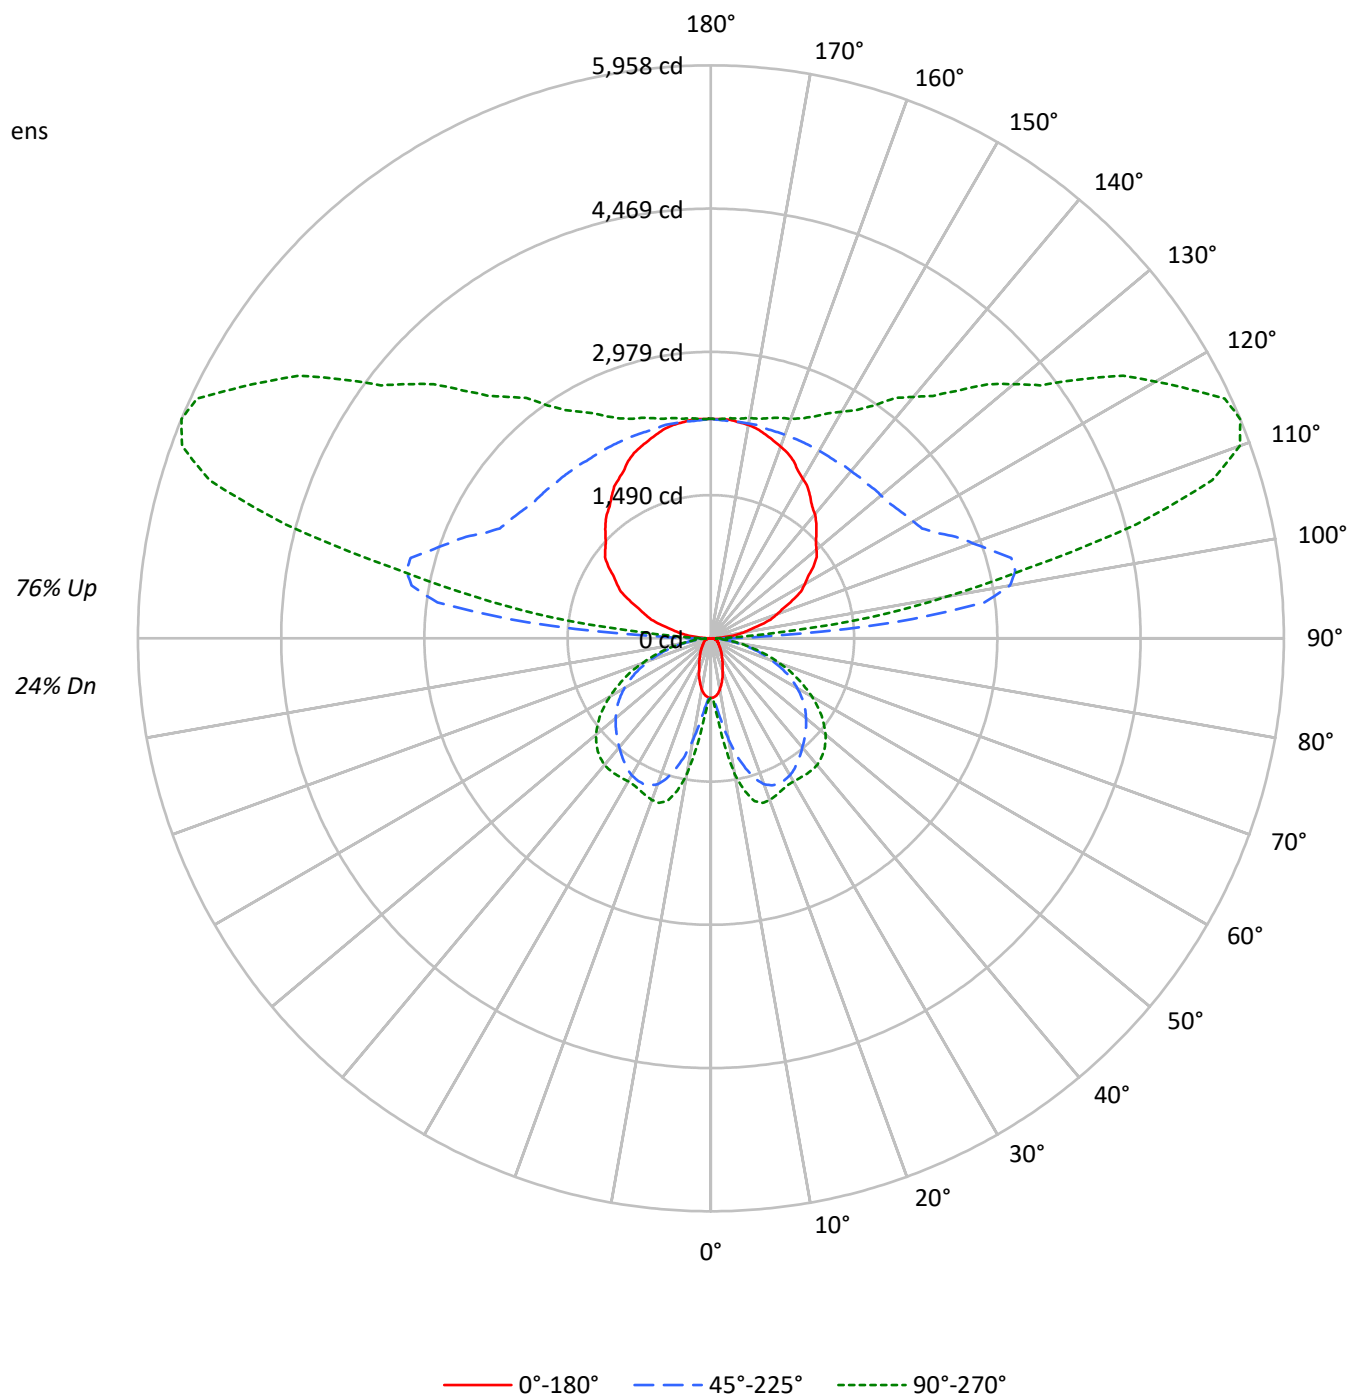

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	84	80	81	78	75	72	60	58	56	44	42	41	28	28	27
2	83	76	70	65	74	68	63	58	52	49	46	38	36	34	25	23	22
3	76	66	59	54	67	59	53	48	46	42	38	33	30	28	22	20	19
4	69	58	51	45	61	52	46	41	40	36	32	29	26	24	19	17	16
5	63	52	44	38	56	46	39	34	36	31	27	26	23	20	17	15	13
6	58	46	38	33	51	41	34	29	32	27	23	23	20	17	15	13	12
7	53	41	34	28	47	37	30	26	29	24	20	21	18	15	14	12	10
8	49	37	30	25	44	33	27	22	26	21	18	19	16	13	12	10	9
9	46	34	27	22	40	30	24	20	24	19	16	17	14	12	11	9	8
10	42	31	24	19	38	28	21	17	22	17	14	16	13	10	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1908	1908	1908
5°	1865	2206	2565
10°	1692	3217	4253
15°	1439	4204	5135
20°	1172	4873	5234
25°	978	5100	5127
30°	825	5134	5118
35°	730	5050	5250
40°	636	4941	5387
45°	577	4861	5408
50°	529	4790	5318
55°	507	4685	5082
60°	520	4481	4710
65°	542	4171	4199
70°	579	3640	3547
75°	643	2970	2768
80°	709	2062	1865
85°	642	1096	954

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 90°

Luminance: 5679 cd/sqm

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.8	0.4
10°-20°	353.7	1.8
20°-30°	618.7	3.2
30°-40°	796.5	4.1
40°-50°	889.7	4.5
50°-60°	852.1	4.4
60°-70°	675.3	3.4
70°-80°	397.1	2.0
80°-90°	119.0	0.6
90°-100°	1112.3	5.7
100°-110°	2924.4	14.9
110°-120°	3032.3	15.5
120°-130°	2432.3	12.4
130°-140°	1908.5	9.7
140°-150°	1464.8	7.5
150°-160°	1054.9	5.4
160°-170°	645.5	3.3
170°-180°	218.1	1.1
0°-30°	1052.3	5.4
0°-40°	1848.8	9.4
0°-60°	3590.5	18.3
0°-90°	4781.9	24.4
90°-120°	7069.1	36.1
90°-150°	12874.7	65.8
90°-180°	14793.0	75.6
0°-180°	19575.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	617	617	617	617	617	
5°	601	645	726	821	851	55
15°	450	831	1401	1698	1752	125
25°	288	942	1668	1742	1744	133
35°	194	901	1571	1661	1726	121
45°	133	718	1389	1591	1663	103
55°	95	456	1178	1369	1407	87
65°	75	242	875	984	998	75
75°	56	149	480	528	530	58
85°	20	46	119	131	133	21
90°	15	43	116	58	58	14
95°	147	576	1916	988	672	163
105°	527	798	3233	4908	4579	559
115°	936	1136	2590	5166	5896	924
125°	1302	1460	2356	3980	4696	1156
135°	1552	1708	2282	3213	3644	1200
145°	1800	1914	2253	2741	2956	1127
155°	2034	2090	2253	2473	2545	935
165°	2195	2224	2253	2342	2371	619
175°	2282	2282	2268	2297	2297	217
180°	2282	2282	2282	2282	2282	

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	617.0	617.0	617.0	617.0	617.0	617.0	617.0	617.0	617.0	617.0	617.0
2.5°	617.0	617.0	621.0	623.0	626.9	628.9	632.9	636.9	648.8	650.8	654.7
5°	601.2	609.1	634.9	644.7	672.6	710.2	726.1	751.9	805.5	821.3	831.3
7.5°	577.3	595.1	658.6	674.5	744.0	843.2	884.8	940.4	1025.7	1067.3	1101.1
10°	539.6	577.3	690.4	728.2	841.2	992.0	1069.3	1146.7	1275.7	1333.3	1355.1
12.5°	497.9	559.5	724.1	775.7	938.4	1158.6	1251.9	1337.2	1484.0	1561.4	1573.3
15°	450.4	533.7	755.9	831.3	1041.6	1297.5	1400.7	1505.8	1642.8	1698.3	1712.2
17.5°	408.7	513.8	785.6	865.0	1121.0	1422.5	1527.6	1615.0	1726.1	1763.8	1773.7
20°	357.1	482.2	805.5	908.7	1204.3	1513.8	1615.0	1682.4	1757.8	1781.6	1785.5
22.5°	319.5	448.3	817.4	924.6	1259.8	1569.3	1654.6	1708.2	1759.8	1767.7	1769.7
25°	287.7	410.7	815.4	942.4	1307.4	1603.0	1668.5	1708.2	1737.9	1742.0	1742.0
27.5°	257.9	369.1	807.4	946.4	1343.1	1611.0	1662.6	1690.3	1704.2	1712.2	1712.2
30°	232.1	329.3	787.6	938.4	1359.0	1603.0	1644.7	1658.6	1672.5	1684.4	1690.3
32.5°	212.3	291.7	757.8	922.5	1361.0	1583.2	1613.0	1620.9	1640.7	1668.5	1678.5
35°	194.4	254.0	724.1	900.7	1349.1	1551.5	1571.3	1579.3	1618.9	1660.6	1674.4
37.5°	176.6	226.2	680.5	863.0	1331.2	1513.8	1527.6	1541.5	1603.0	1652.6	1668.5
40°	158.7	202.3	628.9	821.3	1303.5	1468.2	1480.1	1501.9	1583.2	1640.7	1656.6
42.5°	144.8	182.5	573.4	777.8	1267.8	1416.6	1434.4	1466.2	1559.4	1620.9	1638.7
45°	132.9	162.7	513.8	718.2	1222.1	1362.9	1388.8	1432.5	1531.7	1591.1	1607.0
47.5°	121.0	148.8	452.4	656.7	1172.6	1309.4	1343.1	1392.7	1493.9	1551.5	1565.4
50°	111.1	134.9	390.9	591.2	1118.9	1251.9	1291.6	1343.1	1446.4	1499.9	1517.7
52.5°	103.1	123.1	333.3	525.7	1057.5	1192.4	1238.0	1291.6	1388.8	1440.3	1452.3
55°	95.2	113.1	283.7	456.3	994.0	1128.9	1178.5	1230.0	1325.3	1369.0	1376.9
57.5°	91.3	105.1	242.1	390.9	926.5	1057.5	1113.0	1160.6	1249.9	1283.7	1291.6
60°	85.3	99.2	210.3	335.3	853.1	990.0	1037.7	1085.2	1160.6	1188.4	1194.3
62.5°	79.4	95.2	186.5	281.7	777.8	910.7	958.3	1001.9	1065.4	1085.2	1093.2
65°	75.4	91.3	168.6	242.1	700.4	827.4	875.0	912.6	964.2	984.0	988.0
67.5°	71.4	87.3	154.7	208.3	623.0	744.0	779.7	815.4	855.1	875.0	876.9
70°	65.5	83.3	142.9	184.5	543.6	648.8	678.6	716.2	748.0	757.8	763.9
72.5°	61.5	77.4	134.9	166.6	462.2	557.5	585.3	607.1	634.9	644.7	644.7
75°	55.5	69.4	127.0	148.8	378.9	456.3	480.1	502.0	523.8	527.7	521.8
77.5°	49.6	61.5	109.2	125.0	295.6	361.1	380.9	392.8	410.7	414.6	416.6
80°	41.7	53.5	85.3	97.2	214.3	265.8	279.7	289.7	305.6	305.6	309.5
82.5°	31.7	41.7	61.5	69.4	144.8	182.5	194.4	200.4	210.3	210.3	210.3
85°	19.8	25.8	39.6	45.7	87.3	111.1	119.0	121.0	129.0	130.9	130.9
87.5°	10.0	13.9	25.8	27.8	45.7	57.6	57.6	61.5	61.5	59.6	57.6
90°	15.3	27.5	39.8	42.9	67.3	100.0	116.3	103.4	77.6	58.2	58.2
92.5°	61.2	165.4	269.6	295.6	415.6	575.5	655.5	574.4	412.4	291.0	279.4
95°	147.0	337.6	528.2	575.8	1022.5	1618.1	1915.9	1709.6	1297.2	987.9	952.8
97.5°	254.2	422.3	590.5	632.5	1377.3	2370.4	2867.0	2736.6	2475.9	2280.4	2213.7
100°	336.9	489.5	641.9	680.0	1506.5	2608.6	3159.5	3169.1	3188.1	3202.4	3123.0
102.5°	407.4	549.7	691.9	727.5	1565.8	2683.4	3242.3	3408.3	3740.5	3989.7	3921.6
105°	526.8	647.3	767.8	798.0	1609.6	2691.9	3233.0	3605.3	4350.0	4908.5	4871.9
107.5°	649.4	761.7	874.0	902.1	1617.8	2572.2	3049.3	3568.6	4607.3	5386.3	5395.2
110°	732.1	833.5	934.9	960.3	1605.5	2465.9	2896.1	3476.7	4637.9	5508.9	5547.0

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	813.3	909.9	1006.5	1030.7	1606.0	2373.2	2756.8	3351.0	4539.4	5430.8	5489.4
115°	935.7	1024.8	1114.1	1136.4	1620.9	2266.8	2589.8	3162.3	4307.1	5165.9	5247.0
117.5°	1056.8	1137.7	1218.8	1239.0	1651.0	2200.3	2475.0	2991.6	4024.9	4799.7	4889.8
120°	1127.2	1203.4	1279.7	1298.8	1675.5	2177.9	2429.0	2901.1	3845.2	4553.2	4640.7
122.5°	1196.1	1273.0	1349.9	1369.2	1710.7	2166.1	2393.8	2818.9	3669.0	4306.7	4392.9
125°	1301.8	1371.9	1442.0	1459.6	1758.2	2156.4	2355.5	2716.5	3438.8	3980.4	4059.9
127.5°	1387.6	1458.4	1529.2	1546.8	1805.7	2150.8	2323.3	2633.3	3253.4	3718.5	3785.5
130°	1433.5	1509.8	1586.0	1605.0	1840.4	2154.2	2311.1	2587.1	3139.1	3553.1	3615.1
132.5°	1481.0	1557.2	1633.5	1652.5	1868.5	2156.4	2300.3	2547.4	3041.6	3412.3	3467.8
135°	1551.5	1620.9	1690.3	1707.7	1899.1	2154.4	2282.0	2489.0	2902.8	3213.2	3261.0
137.5°	1623.4	1692.2	1760.9	1778.1	1945.0	2167.6	2278.9	2453.9	2803.7	3066.1	3105.2
140°	1683.1	1746.4	1809.7	1825.6	1973.1	2169.8	2268.2	2419.2	2721.5	2948.1	2984.7
142.5°	1729.0	1787.6	1846.2	1860.8	1996.6	2177.7	2268.2	2400.9	2666.4	2865.5	2897.0
145°	1799.5	1850.6	1901.7	1914.4	2027.2	2177.7	2252.9	2361.5	2578.6	2741.4	2765.2
147.5°	1869.9	1919.6	1969.3	1981.8	2072.2	2192.7	2252.9	2338.3	2509.2	2637.3	2657.0
150°	1915.9	1960.9	2005.8	2017.1	2095.6	2200.5	2252.9	2325.1	2469.3	2577.5	2593.5
152.5°	1963.4	1997.4	2031.6	2040.0	2111.0	2205.6	2252.9	2314.5	2437.7	2530.1	2542.2
155°	2033.8	2059.1	2084.2	2090.5	2144.6	2216.8	2252.9	2301.9	2399.9	2473.4	2481.4
157.5°	2086.0	2110.4	2135.0	2141.1	2178.4	2228.1	2252.9	2291.0	2367.2	2424.4	2430.0
160°	2121.2	2140.2	2159.3	2164.1	2193.7	2233.2	2252.9	2285.5	2350.9	2399.9	2403.2
162.5°	2156.4	2170.7	2185.0	2188.5	2210.0	2238.6	2252.9	2280.5	2335.6	2377.0	2380.0
165°	2194.6	2207.6	2220.5	2223.7	2233.5	2246.4	2252.9	2272.6	2312.1	2341.7	2344.9
167.5°	2229.9	2236.1	2242.2	2243.6	2251.8	2262.8	2268.2	2281.1	2306.9	2326.4	2327.7
170°	2252.9	2259.0	2265.1	2266.6	2267.1	2267.8	2268.2	2281.1	2306.9	2326.4	2326.4
172.5°	2265.1	2266.5	2267.9	2268.2	2268.2	2268.2	2268.2	2278.4	2298.9	2314.1	2313.0
175°	2282.0	2282.0	2282.0	2282.0	2277.4	2271.3	2268.2	2274.7	2287.6	2297.3	2297.3
177.5°	2282.0	2282.0	2282.0	2282.0	2278.4	2273.6	2271.3	2276.4	2286.5	2294.2	2292.8
180°	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0	2282.0

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	617.0	617.0
2.5°	658.6	654.7
5°	847.2	851.1
7.5°	1140.8	1138.8
10°	1418.6	1436.4
12.5°	1620.9	1624.8
15°	1743.9	1751.8
17.5°	1791.6	1793.5
20°	1793.5	1789.6
22.5°	1771.6	1767.7
25°	1745.9	1743.9
27.5°	1722.0	1724.1
30°	1712.2	1718.1
32.5°	1712.2	1722.0
35°	1716.1	1726.1
37.5°	1714.2	1726.1
40°	1706.2	1720.1
42.5°	1684.4	1694.3
45°	1650.7	1662.6
47.5°	1607.0	1615.0
50°	1551.5	1559.4
52.5°	1482.1	1484.0
55°	1398.7	1406.6
57.5°	1309.4	1311.4
60°	1210.2	1216.1
62.5°	1105.1	1105.1
65°	994.0	997.9
67.5°	878.9	888.8
70°	761.9	763.9
72.5°	646.8	646.8
75°	527.7	529.7
77.5°	414.6	414.6
80°	307.5	309.5
82.5°	212.3	216.2
85°	132.9	132.9
87.5°	61.5	55.5
90°	58.2	58.2
92.5°	233.1	186.8
95°	812.6	672.4
97.5°	1946.9	1680.0
100°	2805.1	2487.2
102.5°	3649.3	3377.0
105°	4725.6	4579.3
107.5°	5430.6	5466.0
110°	5699.5	5851.9



TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	5723.4	5957.6
115°	5571.7	5896.4
117.5°	5249.9	5609.9
120°	4990.5	5340.4
122.5°	4738.0	5083.1
125°	4377.7	4695.6
127.5°	4053.7	4321.9
130°	3862.9	4110.6
132.5°	3689.6	3911.5
135°	3452.2	3643.5
137.5°	3261.8	3418.4
140°	3131.1	3277.5
142.5°	3022.9	3148.8
145°	2860.5	2955.8
147.5°	2736.0	2814.9
150°	2657.6	2721.6
152.5°	2590.5	2638.8
155°	2513.4	2545.4
157.5°	2452.5	2475.0
160°	2416.1	2429.0
162.5°	2392.2	2404.5
165°	2357.8	2370.8
167.5°	2333.2	2338.6
170°	2326.4	2326.4
172.5°	2308.1	2303.4
175°	2297.3	2297.3
177.5°	2287.4	2282.0
180°	2282.0	2282.0

TEST NUMBER: P937878

CATALOG NUMBER: SQ4-FB-125U-050D-B2750-1D-UNV-W2A-W-12-3000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.24	0.93	1.39	2.07	3.66	13.43	14.12	14.58	15.26	16.85
	3H	0.93	1.55	2.09	2.69	4.30	15.27	15.88	16.42	17.03	18.63
	4H	1.22	1.81	2.39	2.95	4.57	15.91	16.49	17.07	17.64	19.25
	6H	1.46	2.00	2.63	3.15	4.77	16.33	16.87	17.50	18.02	19.64
	8H	1.53	2.04	2.70	3.20	4.82	16.45	16.96	17.62	18.12	19.74
	12H	1.54	2.02	2.71	3.18	4.82	16.51	17.00	17.69	18.16	19.80
4H	2H	7.44	8.03	8.61	9.17	10.79	13.69	14.27	14.86	15.42	17.03
	3H	8.99	9.48	10.17	10.65	12.28	15.72	16.21	16.89	17.38	19.00
	4H	9.08	9.53	10.26	10.69	12.33	16.48	16.93	17.66	18.09	19.74
	6H	9.08	9.47	10.26	10.65	12.28	17.02	17.40	18.20	18.58	20.22
	8H	9.05	9.41	10.23	10.59	12.24	17.18	17.54	18.36	18.71	20.36
	12H	9.00	9.33	10.20	10.51	12.17	17.26	17.59	18.46	18.77	20.43
8H	4H	10.51	10.87	11.69	12.05	13.70	16.53	16.89	17.71	18.06	19.71
	6H	10.75	11.05	11.95	12.26	13.91	17.15	17.45	18.35	18.67	20.31
	8H	10.76	11.02	11.97	12.21	13.88	17.37	17.63	18.58	18.82	20.49
	12H	10.72	10.95	11.93	12.14	13.84	17.51	17.74	18.72	18.93	20.63
12H	4H	10.65	10.98	11.85	12.16	13.82	16.47	16.80	17.67	17.98	19.64
	6H	11.01	11.26	12.21	12.46	14.12	17.13	17.39	18.34	18.59	20.25
	8H	11.07	11.29	12.27	12.48	14.18	17.36	17.59	18.57	18.78	20.47