

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936884

Luminaire Tested: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936884
REPORT IS A COMBINATION OF REPORTS P933471 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5010.7 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 45.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

Luminous Intensity Polar Plot

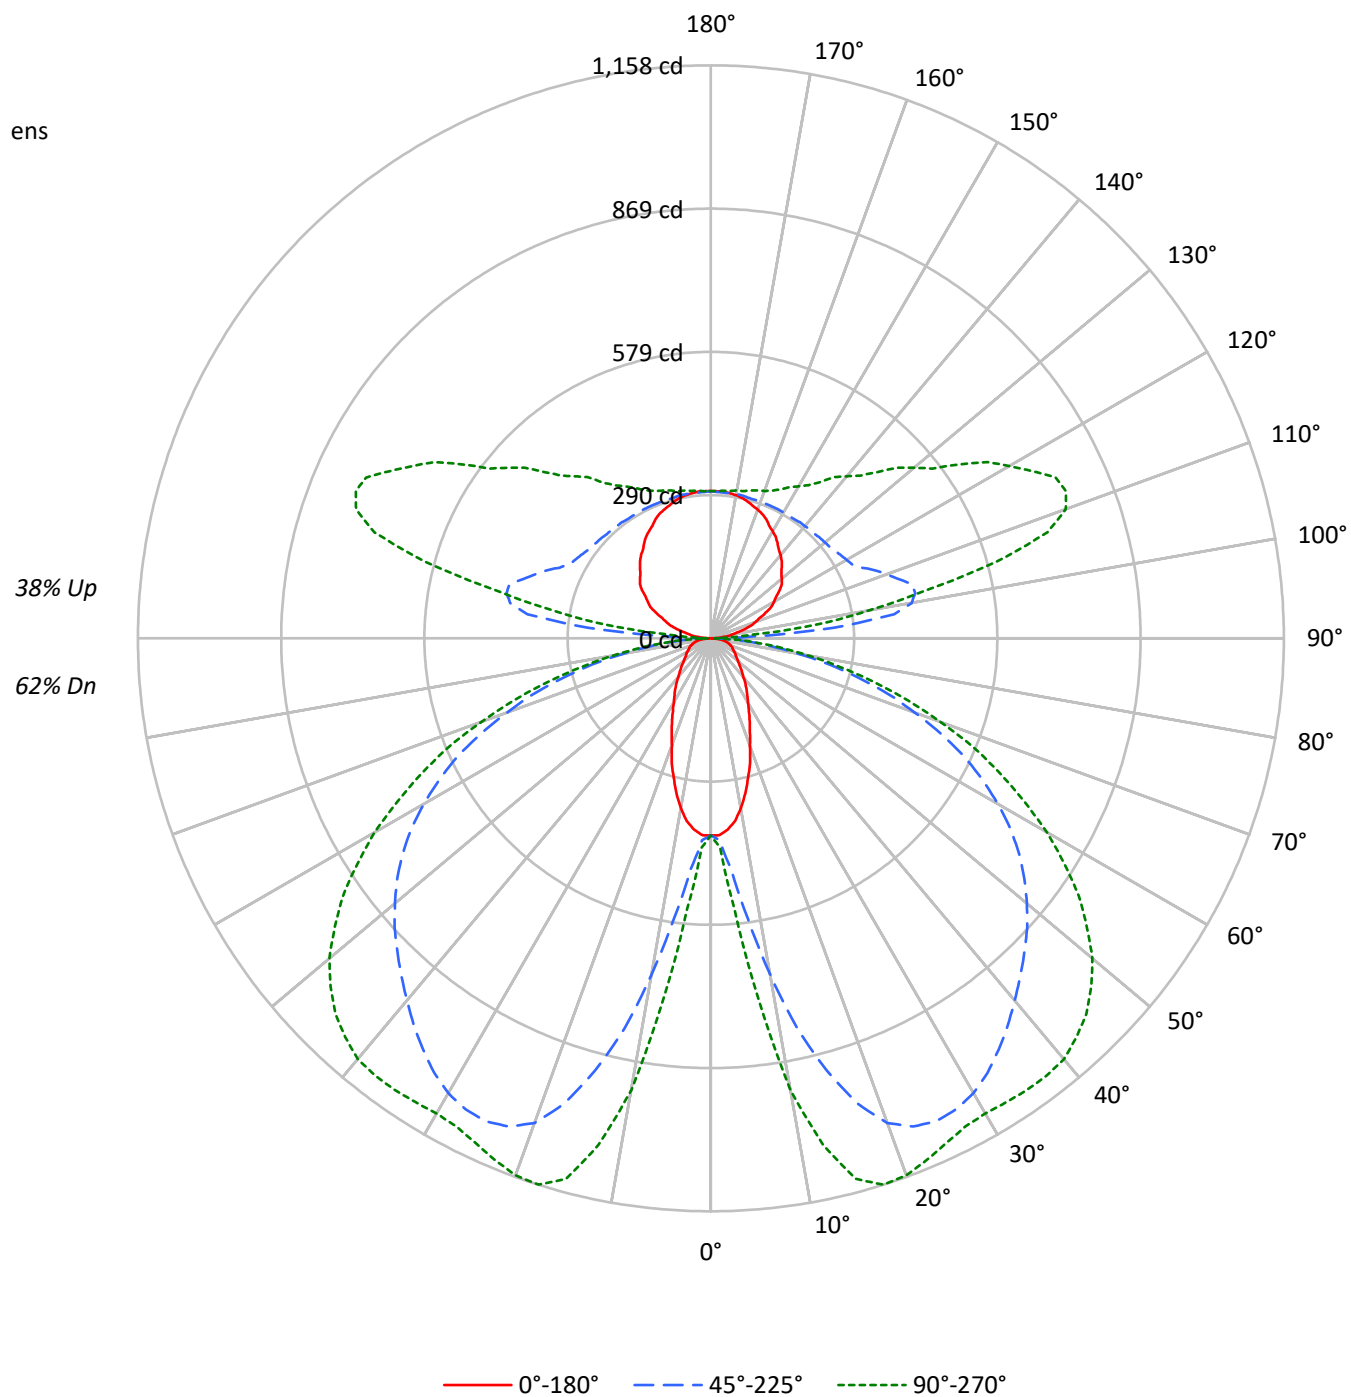

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67
1	100	95	91	87	93	89	85	82	78	75	72	67	65	63	58	56	55
2	90	82	75	70	84	77	71	66	67	63	59	58	55	52	50	48	45
3	82	72	64	57	76	67	60	54	59	53	49	51	47	43	44	40	38
4	74	63	54	48	69	59	51	45	52	46	41	45	40	36	39	35	32
5	68	56	47	41	63	52	44	39	46	40	35	40	35	31	34	30	27
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	23
7	58	45	36	30	54	42	34	29	37	31	26	32	27	23	28	24	21
8	53	40	32	26	50	38	30	25	34	27	23	29	24	20	25	21	18
9	50	37	29	23	46	35	27	22	31	24	20	27	22	18	23	19	16
10	46	33	26	21	43	32	25	20	28	22	18	25	20	16	21	17	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3695	3695	3695
5°	3606	4267	4967
10°	3267	6216	8233
15°	2773	8116	9942
20°	2255	9398	10133
25°	1879	9827	9927
30°	1582	9881	9908
35°	1397	9710	10165
40°	1215	9487	10429
45°	1098	9323	10470
50°	1005	9173	10297
55°	959	8959	9840
60°	978	8554	9120
65°	1013	7942	8129
70°	1071	6913	6867
75°	1177	5623	5360
80°	1254	3884	3611
85°	1060	2050	1849

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10470 cd/sqm

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	1.0
10°-20°	228.3	4.6
20°-30°	399.3	8.0
30°-40°	514.0	10.3
40°-50°	574.2	11.5
50°-60°	549.9	11.0
60°-70°	435.8	8.7
70°-80°	256.3	5.1
80°-90°	72.3	1.4
90°-100°	145.0	2.9
100°-110°	381.4	7.6
110°-120°	395.4	7.9
120°-130°	317.2	6.3
130°-140°	248.9	5.0
140°-150°	191.0	3.8
150°-160°	137.6	2.7
160°-170°	84.2	1.7
170°-180°	28.4	0.6
0°-30°	679.1	13.6
0°-40°	1193.1	23.8
0°-60°	2317.2	46.2
0°-90°	3081.6	61.5
90°-120°	921.8	18.4
90°-150°	1678.9	33.5
90°-180°	1929.0	38.5
0°-180°	5010.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	398	398	398	398	398	
5°	388	416	469	530	549	36
15°	291	536	904	1096	1130	81
25°	186	608	1077	1124	1126	86
35°	126	581	1014	1072	1114	78
45°	86	464	896	1027	1073	66
55°	61	294	761	883	908	56
65°	49	156	565	635	644	48
75°	36	96	310	341	342	38
85°	13	30	77	84	86	14
90°	2	6	15	8	8	3
95°	19	75	250	129	88	21
105°	69	104	422	640	597	73
115°	122	148	338	674	769	120
125°	170	190	307	519	612	151
135°	202	223	298	419	475	157
145°	235	250	294	358	386	147
155°	265	273	294	323	332	122
165°	286	290	294	305	309	81
175°	298	298	296	300	300	28
180°	298	298	298	298	298	

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	398.2	398.2	398.2	398.2	398.2	398.2	398.2	398.2	398.2	398.2	398.2
2.5°	398.2	398.2	400.8	402.0	404.6	405.9	408.4	411.0	418.7	420.0	422.5
5°	388.0	393.1	409.7	416.1	434.0	458.3	468.6	485.3	519.9	530.0	536.4
7.5°	372.6	384.1	425.1	435.4	480.1	544.2	571.0	606.9	661.9	688.9	710.6
10°	348.3	372.6	445.5	469.9	542.8	640.2	690.1	740.0	823.3	860.4	874.5
12.5°	321.4	361.0	467.3	500.6	605.6	747.8	808.0	863.0	957.8	1007.7	1015.3
15°	290.6	344.4	487.8	536.4	672.2	837.4	904.0	971.8	1060.2	1096.0	1105.0
17.5°	263.8	331.6	507.0	558.2	723.5	918.0	985.9	1042.3	1114.0	1138.3	1144.7
20°	230.4	311.1	519.9	586.4	777.2	976.9	1042.3	1085.8	1134.4	1149.8	1152.3
22.5°	206.1	289.3	527.5	596.6	813.0	1012.8	1067.8	1102.4	1135.7	1140.8	1142.1
25°	185.7	265.0	526.3	608.1	843.8	1034.5	1076.8	1102.4	1121.6	1124.1	1124.1
27.5°	166.5	238.2	521.1	610.8	866.8	1039.6	1073.0	1090.9	1099.8	1105.0	1105.0
30°	149.8	212.5	508.3	605.6	877.0	1034.5	1061.4	1070.4	1079.4	1087.0	1090.9
32.5°	137.0	188.2	489.2	595.4	878.3	1021.7	1040.9	1046.0	1058.8	1076.8	1083.2
35°	125.5	163.9	467.3	581.3	870.6	1001.3	1014.1	1019.2	1044.8	1071.7	1080.6
37.5°	114.0	145.9	439.2	557.0	859.1	976.9	985.9	994.9	1034.5	1066.6	1076.8
40°	102.4	130.6	405.9	530.0	841.2	947.5	955.1	969.3	1021.7	1058.8	1069.1
42.5°	93.5	117.8	370.1	501.9	818.1	914.2	925.7	946.2	1006.4	1046.0	1057.6
45°	85.8	104.9	331.6	463.5	788.7	879.7	896.2	924.4	988.5	1026.8	1037.1
47.5°	78.1	96.0	292.0	423.8	756.7	845.1	866.8	898.8	964.2	1001.3	1010.2
50°	71.7	87.1	252.2	381.6	722.1	808.0	833.5	866.8	933.4	967.9	979.5
52.5°	66.6	79.4	215.1	339.3	682.5	769.5	798.9	833.5	896.2	929.6	937.2
55°	61.4	73.0	183.1	294.5	641.5	728.5	760.6	793.8	855.3	883.4	888.6
57.5°	58.9	67.8	156.2	252.2	598.0	682.5	718.3	749.0	806.6	828.4	833.5
60°	55.0	64.1	135.8	216.4	550.6	638.9	669.7	700.4	749.0	767.0	770.7
62.5°	51.3	61.4	120.3	181.8	501.9	587.7	618.4	646.6	687.6	700.4	705.5
65°	48.6	58.9	108.8	156.2	451.9	533.9	564.6	589.0	622.3	635.1	637.6
67.5°	46.1	56.3	99.9	134.4	402.0	480.1	503.2	526.3	551.8	564.6	565.9
70°	42.2	53.8	92.2	119.1	350.8	418.7	437.9	462.2	482.7	489.2	492.9
72.5°	39.7	49.9	87.1	107.6	298.4	359.8	377.7	391.8	409.7	416.1	416.1
75°	35.9	44.8	82.0	96.0	244.6	294.5	309.9	323.9	338.0	340.6	336.7
77.5°	32.0	39.7	70.4	80.6	190.8	233.0	245.8	253.5	265.0	267.6	268.9
80°	26.8	34.6	55.0	62.7	138.3	171.6	180.5	186.9	197.2	197.2	199.7
82.5°	20.4	26.8	39.7	44.8	93.5	117.8	125.5	129.4	135.8	135.8	135.8
85°	12.8	16.7	25.6	29.5	56.3	71.7	76.8	78.1	83.2	84.5	84.5
87.5°	6.4	8.9	16.7	17.9	29.5	37.1	37.1	39.7	39.7	38.4	37.1
90°	2.0	3.6	5.2	5.6	8.8	13.1	15.2	13.5	10.1	7.6	7.6
92.5°	7.9	21.5	35.2	38.6	54.2	75.0	85.5	74.9	53.8	38.0	36.4
95°	19.2	44.0	68.9	75.1	133.3	211.0	249.8	222.9	169.1	128.8	124.2
97.5°	33.1	55.0	76.9	82.5	179.6	309.1	373.8	356.9	322.9	297.4	288.7
100°	43.9	63.8	83.7	88.7	196.4	340.1	412.0	413.3	415.8	417.6	407.3
102.5°	53.1	71.7	90.2	94.9	204.2	349.9	422.8	444.5	487.8	520.3	511.3
105°	68.7	84.4	100.1	104.1	209.9	351.1	421.6	470.2	567.3	640.1	635.4
107.5°	84.7	99.3	114.0	117.6	211.0	335.5	397.7	465.4	600.9	702.4	703.6
110°	95.4	108.6	121.9	125.2	209.4	321.6	377.7	453.4	604.8	718.4	723.4

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	106.0	118.6	131.2	134.4	209.4	309.5	359.5	437.0	592.0	708.2	715.9
115°	122.0	133.6	145.3	148.2	211.3	295.5	337.7	412.3	561.6	673.6	684.2
117.5°	137.8	148.4	158.9	161.5	215.3	286.9	322.8	390.1	524.8	625.9	637.6
120°	147.0	157.0	166.9	169.4	218.5	284.0	316.8	378.3	501.5	593.8	605.2
122.5°	156.0	166.1	176.1	178.6	223.1	282.5	312.1	367.5	478.5	561.6	572.9
125°	169.8	178.9	188.0	190.3	229.3	281.2	307.2	354.3	448.5	519.1	529.5
127.5°	180.9	190.2	199.4	201.7	235.5	280.5	303.0	343.4	424.2	484.9	493.6
130°	186.9	196.9	206.8	209.3	240.0	280.9	301.4	337.4	409.4	463.4	471.4
132.5°	193.1	203.1	213.0	215.5	243.7	281.2	300.0	332.2	396.6	445.0	452.2
135°	202.3	211.3	220.4	222.7	247.7	280.9	297.6	324.5	378.5	419.0	425.2
137.5°	211.7	220.6	229.7	231.9	253.7	282.7	297.2	320.0	365.6	399.8	404.9
140°	219.5	227.7	236.0	238.1	257.3	282.9	295.7	315.5	354.9	384.5	389.2
142.5°	225.5	233.1	240.7	242.6	260.4	283.9	295.7	313.1	347.7	373.6	377.7
145°	234.7	241.3	248.0	249.6	264.3	284.0	293.8	307.9	336.2	357.5	360.6
147.5°	243.9	250.4	256.8	258.4	270.3	286.0	293.8	304.9	327.2	343.9	346.5
150°	249.8	255.6	261.5	263.0	273.3	286.9	293.8	303.2	322.0	336.1	338.3
152.5°	256.0	260.5	264.9	266.0	275.3	287.6	293.8	301.8	317.9	329.9	331.5
155°	265.2	268.5	271.8	272.6	279.7	289.1	293.8	300.2	313.0	322.6	323.6
157.5°	272.0	275.2	278.4	279.2	284.0	290.5	293.8	298.7	308.7	316.2	317.0
160°	276.6	279.1	281.6	282.2	286.0	291.2	293.8	298.1	306.6	313.0	313.4
162.5°	281.2	283.0	284.9	285.4	288.2	292.0	293.8	297.4	304.6	310.0	310.4
165°	286.2	287.9	289.6	290.0	291.3	292.9	293.8	296.3	301.5	305.3	305.7
167.5°	290.8	291.6	292.3	292.5	293.6	295.1	295.7	297.5	300.9	303.4	303.6
170°	293.8	294.6	295.4	295.5	295.6	295.7	295.7	297.5	300.9	303.4	303.4
172.5°	295.4	295.5	295.7	295.7	295.7	295.7	295.7	297.1	299.7	301.7	301.6
175°	297.6	297.6	297.6	297.6	297.0	296.1	295.7	296.6	298.4	299.6	299.6
177.5°	297.6	297.6	297.6	297.6	297.1	296.5	296.2	296.9	298.3	299.2	299.0
180°	297.6	297.6	297.6	297.6	297.6	297.6	297.6	297.6	297.6	297.6	297.6

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	398.2	398.2
2.5°	425.1	422.5
5°	546.7	549.3
7.5°	736.2	734.9
10°	915.5	926.9
12.5°	1046.0	1048.7
15°	1125.5	1130.5
17.5°	1156.2	1157.5
20°	1157.5	1154.9
22.5°	1143.4	1140.8
25°	1126.8	1125.5
27.5°	1111.3	1112.6
30°	1105.0	1108.8
32.5°	1105.0	1111.3
35°	1107.6	1114.0
37.5°	1106.2	1114.0
40°	1101.2	1110.1
42.5°	1087.0	1093.4
45°	1065.3	1073.0
47.5°	1037.1	1042.3
50°	1001.3	1006.4
52.5°	956.4	957.8
55°	902.6	907.8
57.5°	845.1	846.3
60°	781.0	784.9
62.5°	713.2	713.2
65°	641.5	644.0
67.5°	567.3	573.6
70°	491.7	492.9
72.5°	417.4	417.4
75°	340.6	341.9
77.5°	267.6	267.6
80°	198.5	199.7
82.5°	137.0	139.5
85°	85.8	85.8
87.5°	39.7	35.9
90°	7.6	7.6
92.5°	30.4	24.3
95°	105.9	87.7
97.5°	253.9	219.1
100°	365.8	324.3
102.5°	475.9	440.4
105°	616.3	597.2
107.5°	708.1	712.8
110°	743.2	763.1

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	746.4	776.9
115°	726.6	768.9
117.5°	684.6	731.6
120°	650.8	696.4
122.5°	617.9	662.9
125°	570.8	612.3
127.5°	528.6	563.6
130°	503.8	536.1
132.5°	481.1	510.1
135°	450.2	475.1
137.5°	425.3	445.7
140°	408.3	427.4
142.5°	394.2	410.7
145°	373.1	385.5
147.5°	356.8	367.1
150°	346.6	354.9
152.5°	337.8	344.1
155°	327.8	332.0
157.5°	319.9	322.8
160°	315.1	316.8
162.5°	312.0	313.6
165°	307.5	309.2
167.5°	304.3	304.9
170°	303.4	303.4
172.5°	301.0	300.4
175°	299.6	299.6
177.5°	298.4	297.6
180°	297.6	297.6

TEST NUMBER: P936884

CATALOG NUMBER: SQ4-FB-050U-100D-B2750-1D-UNV-W2A-W-4-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.52	7.54	7.36	8.41	9.51	19.65	20.68	20.50	21.55	22.64
	3H	7.23	8.16	8.09	9.04	10.16	21.49	22.41	22.35	23.29	24.41
	4H	7.54	8.41	8.41	9.30	10.43	22.13	23.01	23.00	23.89	25.02
	6H	7.80	8.61	8.68	9.50	10.64	22.56	23.37	23.44	24.26	25.41
	8H	7.87	8.64	8.76	9.55	10.70	22.68	23.45	23.57	24.36	25.50
	12H	7.89	8.63	8.79	9.54	10.71	22.75	23.48	23.64	24.39	25.56
4H	2H	13.73	14.60	14.60	15.49	16.62	19.95	20.82	20.83	21.71	22.84
	3H	15.31	16.04	16.20	16.96	18.11	22.00	22.73	22.88	23.65	24.79
	4H	15.41	16.08	16.31	17.00	18.17	22.76	23.43	23.66	24.34	25.51
	6H	15.43	16.01	16.35	16.95	18.12	23.30	23.88	24.21	24.81	25.99
	8H	15.42	15.96	16.33	16.89	18.08	23.46	24.00	24.37	24.93	26.12
	12H	15.38	15.87	16.32	16.82	18.01	23.55	24.04	24.49	24.99	26.18
8H	4H	16.86	17.40	17.78	18.34	19.52	22.83	23.38	23.75	24.31	25.50
	6H	17.11	17.56	18.06	18.54	19.72	23.46	23.91	24.40	24.88	26.07
	8H	17.13	17.53	18.09	18.50	19.70	23.67	24.07	24.63	25.04	26.24
	12H	17.11	17.46	18.07	18.42	19.67	23.82	24.17	24.78	25.13	26.38
12H	4H	17.01	17.50	17.95	18.45	19.64	22.80	23.29	23.73	24.24	25.43
	6H	17.37	17.77	18.32	18.73	19.94	23.44	23.84	24.40	24.81	26.01
	8H	17.45	17.80	18.40	18.76	20.01	23.68	24.03	24.63	24.99	26.24